


ISSUE	ITEM	CHANGED FROM	DATE	EN. NO.	DRAFTS	CHECKER	ENG. APP.	REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
X		ENG RELEASE	27 APR 72		NAT.	4B	<i>[Signature]</i>	X	1	WI 123-22	WIRE, MAGNET.	
								1	2	GT10012-744-10	CORE TOROIDIAL	
								X	3	GL104-2	INSULATING VARNISH	

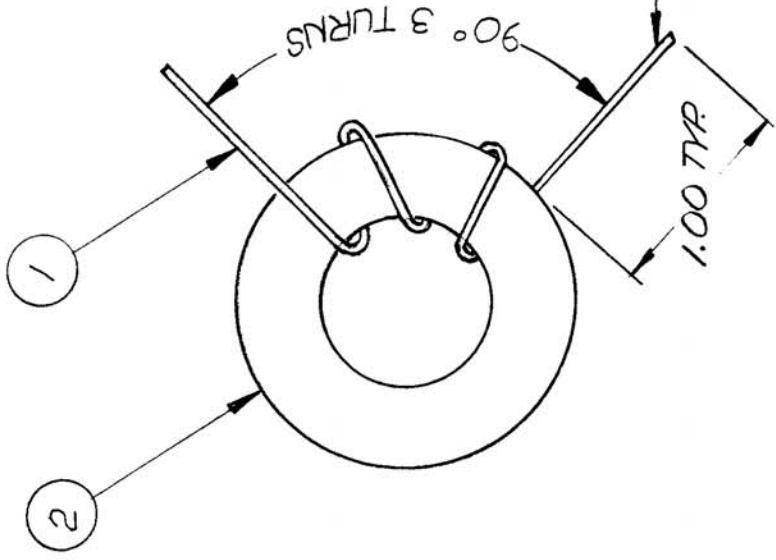

AFTER ADJUSTING, DIP IN INSULATING VARNISH, (ITEM 3), AND BAKE FOR ONE HOUR AT 125°C, AND COOL AT -20°C FOR ONE HOUR

NOTE:

INDUCTANCE .09 μ H \pm 10%

STRIP VARNISH
.75 (TYP)

MODEL	PROJECT NO.	11029-5	DATE	27 APR 72	STOCK SIZE	TMC (Canada) LIMITED OTTAWA ONTARIO	
USED ON		ASS'Y. NO.			MATERIAL	COIL, R.F.	
MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION REMOVE ALL BURRS AND SHARP EDGES		IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.			WEIGHT PER PC.		
TOLERANCES		SCALE 4:1			TYPE & TEMPER	THOMAS	
DEC. DIM. 1	.X = .06	DIMENSIONS IN INCHES			HEAT TREAT. SPEC.	DRAWN L. BROWN	
FRAC. DIM. $\pm \frac{1}{64}$.XX = .01	UNLESS OTHERWISE SPECIFIED			ELEC DES APP		
ANGULAR DIM. $\pm 0^{\circ} 30'$.XXX = .006	DRILL: PUNCH, COMMERCIAL STOCK SIZES AND MANUFACTURERS TOLERANCES ARE NOT INCLUDED.			MECH. DES. APP.		
ALL OTHERS					CHECKED FINAL APPROVAL		
					CL10061		