REQ. PER UNIT	USED ON MODEL	ASS'Y. NO.	DATE	CL 161	A
1	SBE-2				
1	SBE-3	AX-204	12-9-59		

Bushing Ass'y. to be Cemented to form upon Ass'y. of Coil into unit.

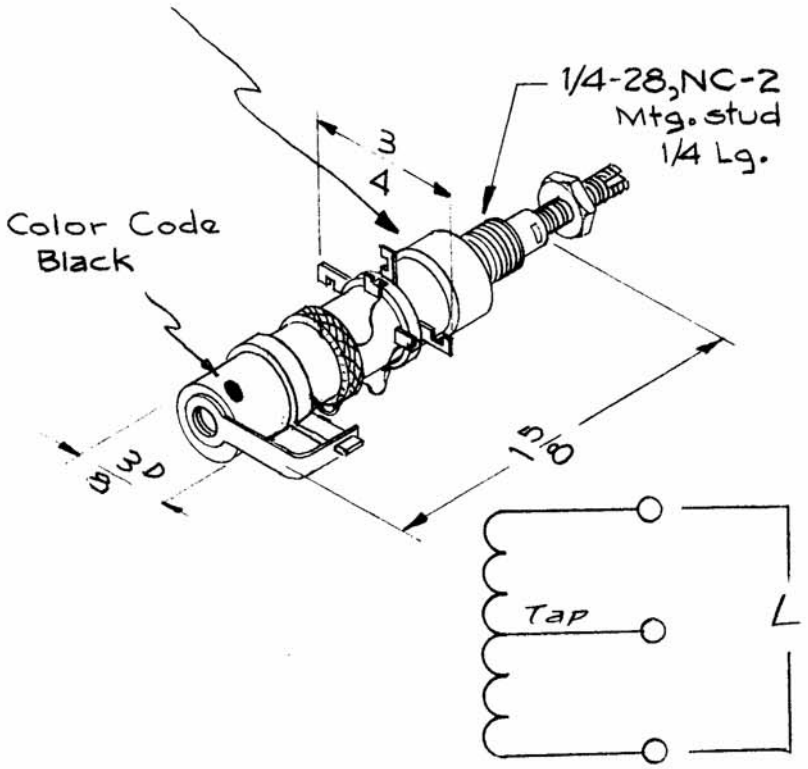

ELECTRICAL SPECIFICATIONS

L - 25.5(23.5-27.5) Microhenries
Q - 60 or greater
FREQ. (Test) - 2.5 Mcs
OPER. FREQ. - 2-4.3 Mcs

MECHANICAL SPECIFICATIONS

TOTAL TURNS - 42
TAP - 8 turns
WIRE - WI-104-541DSQS
TUNING SLUG - Powdered Iron
FORM - Phenolic

NOTICE TO PERSONS RECEIVING THIS DRAWING

THE TECHNICAL MATERIEL CORPORATION claims proprietary right in the material disclosed hereon. This drawing is loaned in confidence for engineering information only and may not be reproduced or used to manufacture anything shown hereon without permission from THE TECHNICAL MATERIEL CORPORATION to the user. This drawing is loaned for mutual assistance and is subject to recall at any time.

Property of:

THE TECHNICAL MATERIEL CORPORATION
MAMARONECK, NEW YORK

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
A	1	TERM. RING REPOSITIONED	6-17-CC	16378			

TOLERANCES
DEC. DIM. ±
FRAC. DIM. ±
ANGULAR DIM. ±

SCALE:

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL

STOCK SIZE

MATERIAL

TYPE & TEMPER | HEAT TREAT. SPEC.

FINISH & SPEC. NO.

THE TECHNICAL MATERIEL CORP.
MAMARONECK, NEW YORK

COIL, RF, TUNED, 2-4.3 mc,

DRAWN	CHECKED	FINAL APPROVAL
D.A. Mann 12-9-59	16	

ELEC. DES. APP	MECH. DES. APP	
		CL 161 A

2A-1451-1

FORM 108-A