


REQ. PER UNIT		USED ON	
1	MODEL	ASST. NO.	DATE
2	SBE-1#2		
1	TTC		
	SBE-3	AX-204	12-9-59

CL162 A

Bushing Assy to be cemented to form upon Assy of coil into unit.

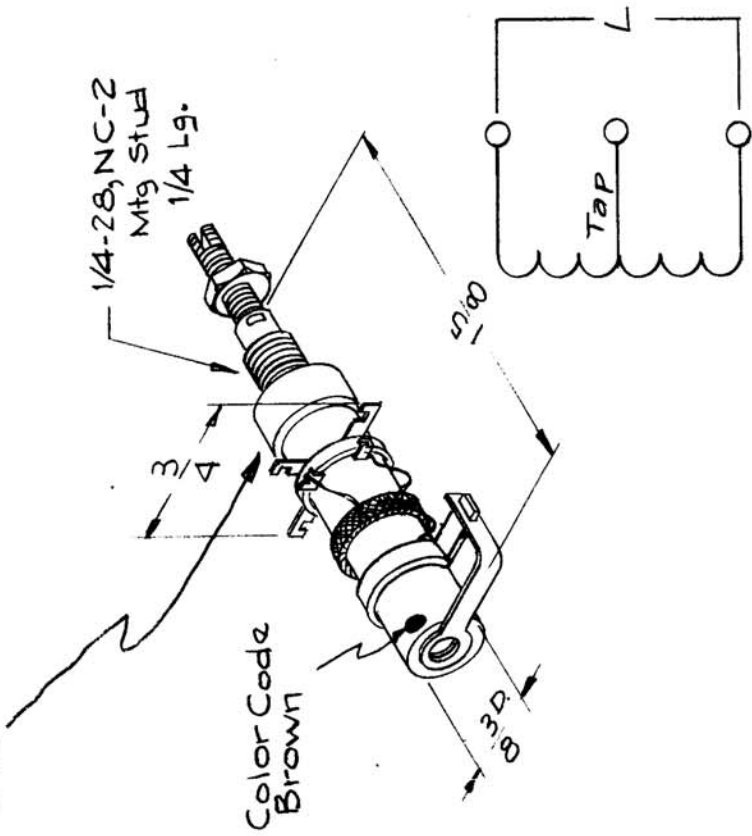

ELECTRICAL SPECIFICATIONS

L - 25.5(23.5 - 27.5) Microhenries
 Q - 60 or greater
 FREQ. (Test) - 2.5 Mcs
 OPER. FREQ. - 2.4-3 Mcs

MECHANICAL SPECIFICATIONS

TOTAL TURNS - 42
 TAP - 16
 WIRE - WL-104-54LDSQS
 TUNING SLUG - Powdered Iron
 FORM - Phenolic

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
		COIL, RF, TUNED, 2-4.3 mc	
		MATERIAL	
		HEAT TREAT. SPEC.	
		FINISH & SPEC. NO.	
		TYPE & TEMPER	
		DRAWN	
		CHECKED	
		FINAL APPR VAL	
A	1	TERM RING REPOSITIONED	
		DATE	
		CH. NO.	
		DRAFTS	
		CHECKER	
		ENG. APP.	
		SCALE:	2A-1451-2
TOLERANCES			
MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES			
DEC. DIM. ±			
FRAG. DIM. ±			
ANGULAR DIM. ±			