REQ. PER UNIT	USED ON MODEL	ASS'Y. NO.	DATE	CL 164	A
2	SBE-3	AX-204			

Bushing Ass'y to be Cemented to form upon Ass'y of Coil into unit.

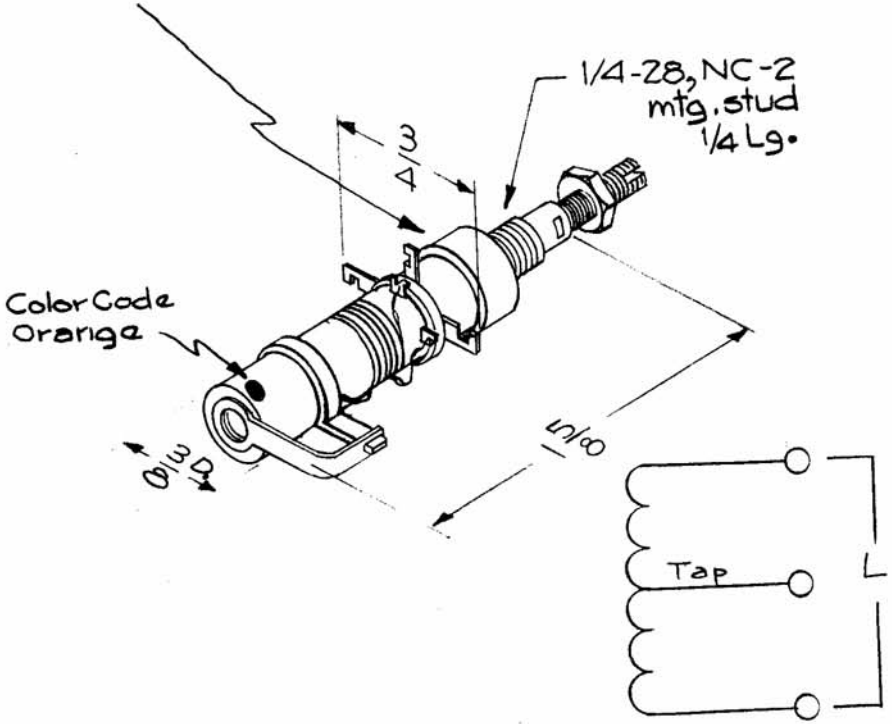

ELECTRICAL SPECIFICATIONS

L - 1.1(1.0-1.2) Microhenries
Q - 90 or greater
FREQ.(TEST) - 7.9 Mcs
OPER. FREQ. - 8-16 Mcs

MECHANICAL SPECIFICATIONS

TOTAL TURNS - 12
TAP - 6
WIRE - WI-107-5
TUNING SLUG - Powdered Iron
FORM - Phenolic

NOTICE TO PERSONS RECEIVING THIS DRAWING

THE TECHNICAL MATERIEL CORPORATION claims proprietary rights in the material disclosed hereon. This drawing is issued in confidence for engineering information only and may not be reproduced or used to manufacture anything shown on it, in whole or in part, without permission from THE TECHNICAL MATERIEL CORPORATION to the user. This drawing is loaned for mutual assistance and is subject to recall at any time.

Property of:

THE TECHNICAL MATERIEL CORPORATION
MAMARONECK, NEW YORK

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
A	1	TERM RING REPOSITIONED	6-17-46	X	MRD		

TOLERANCES
DEC. DIM. ±
FRAC. DIM. ±
ANGULAR DIM. ±

SCALE:

2A-1451-4

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL

STOCK SIZE

MATERIAL

TYPE & TEMPER | HEAT TREAT. SPEC.

FINISH & SPEC. NO.

THE TECHNICAL MATERIEL CORP.
MAMARONECK, NEW YORK

COIL, RF, TUNED, 8-16 mc

DRAWN	CHECKED	FINAL APPROVAL
DJ Mann	HO	
ELEC. DES. APP	MECH. DES. APP	CL 164 A