REQ. PER UNIT	USED ON M DEL	USED ON ASS'Y. N.	DATE	CL 165	A
1	SBE-3	AX-204			

Bushing Ass'y. to be Cemented to form upon Ass'y. of Coil into Unit.

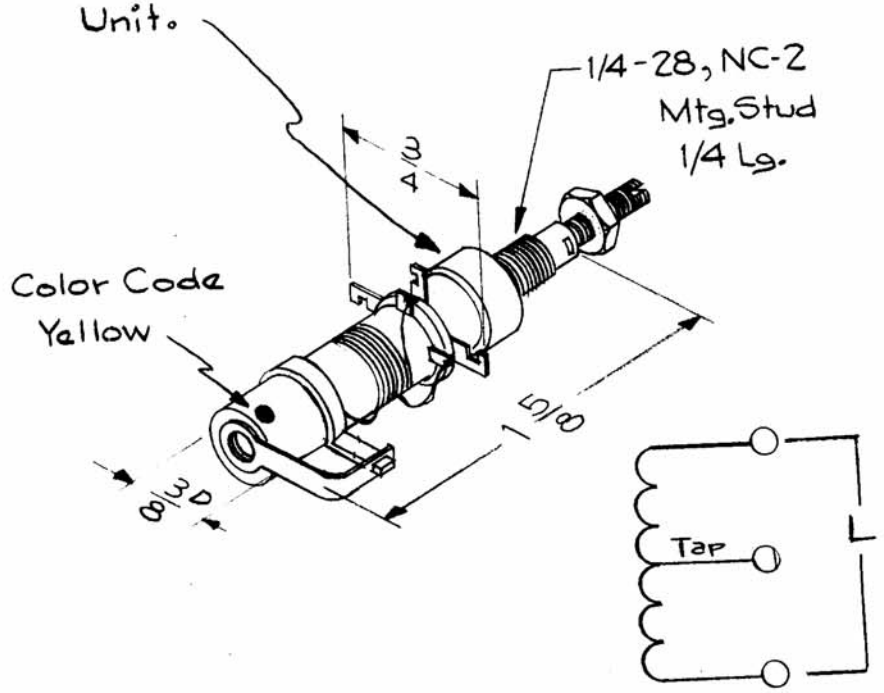

ELECTRICAL SPECIFICATIONS

L - 1.1(1.0-1.2) Microhenries
Q - 90 or greater
FREQ.(TEST) - 7.9 Mcs
OPER. FREQ. - 8-16 Mcs

MECHANICAL SPECIFICATIONS

TOTAL TURNS - 12
TAP - 3 Turns
WIRE - WI-107-5
TUNING SLUG - Powdered Iron
FORM - Phenolic

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
A	1	TERM. RING REPOSITIONED	6-17-CC	16378			

TOLERANCES
DEC. DIM. ±
FRAC. DIM. ±
ANGULAR DIM. ±

SCALE:

2A-1451-5

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL

STOCK SIZE

MATERIAL

TYPE & TEMPER | HEAT TREAT. SPEC.

FINISH & SPEC. NO.

THE TECHNICAL MATERIEL CORP.
MAMARONECK, NEW YORK

COIL, RF, TUNED, 8-16 mc.

DRAWN	CHECKED	FINAL APPROVAL
DJ Mann 46		
ELEC. DES. APP	MECH. DES. APP	CL 165 A