


CL-180

REQ. PER. UNIT	MODEL	USED ON
5	RFB-1	ASSY. NO.
RFC-1	AX-165	DATE
		11-22-60

ELECTRICAL SPEC.
 L- 26.4 mhy (23.8- 29.0)
 Q- 100 or Greater
 F (TEST)- 2.5 MC

MECHANICAL SPEC.
 CORE - Powdered Iron
 WINDING- 45 turns #541 Litz Wire
 Color Code- Yellow

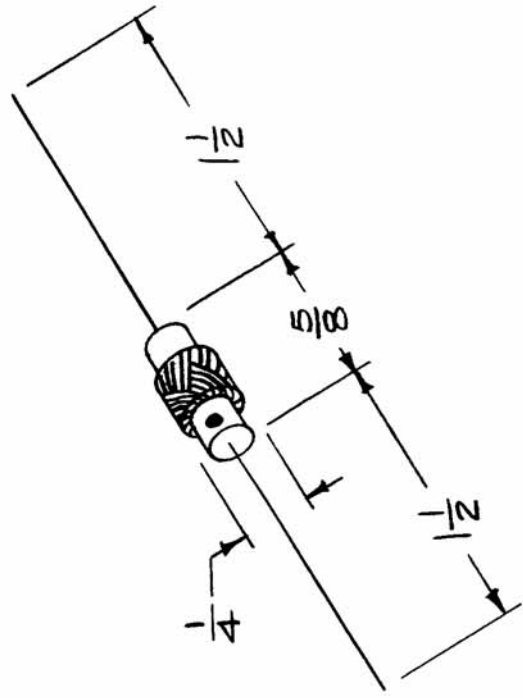

REQ. ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
					1A1076	
TOLERANCES						
DEC. DIM. ±	DIM.					
FRAC. DIM. ±	FOR					
ANGULAR DIM. ±	REF.					
SCALE:						
MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES						
REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL	TYPE & TEMPER	HEATTREAT. SPEC.	FINISH & SPEC. NO.
		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK				
		COIL, RF, FIXED, 26.4 mhy				
				DRAWN	CHECKED	FINAL APPROVAL
				16/9/59	JW	CMS
						CL-180
						ELEC. DES. APP. MECH. DES. APP.