REQ. PER UNIT	USED ON			CL-188	B
	MODEL	ASS'Y. NO.	DATE		
2	SBE-3	AX-204			

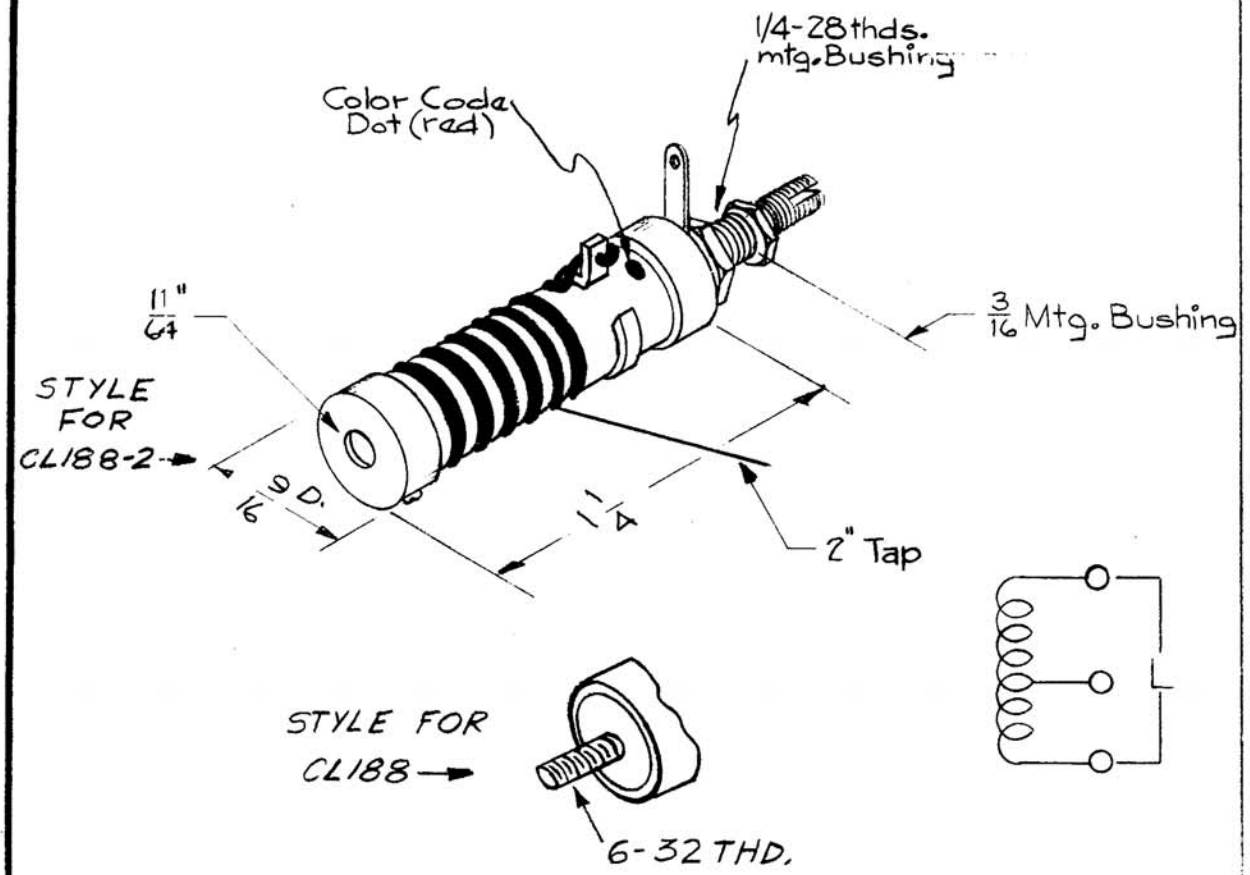

ELECTRICAL SPECIFICATIONS

L - .40 (.39 - .41) Microhenries
Q - 170 or greater
FREQ. (Test) - 25 Mcs
OPER. FREQ. - 16-32 Mcs.

MECHANICAL SPECIFICATIONS

TOTAL TURNS = 6-1/2
TAP - 4 turns
WIRE - No. 16 Buss
TUNING SLUG - Powdered Iron
FORM - Phenolic

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
B		Eeloc. Term. Ring	6/10/66	16370	[illegible]	[illegible]	[illegible]
A	1	STYLE FOR PICT. ADDED	11/22/65	15225	[illegible]	[illegible]	[illegible]

TOLERANCES	SCALE:	NO NPL	2A1519-1
DEC. DIM. ± FRAC. DIM. ± ANGULAR DIM. ±	MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES		

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL

STOCK SIZE

MATERIAL

TYPE & TEMPER | HEAT TREAT. SPEC.

FINISH & SPEC. NO.

THE TECHNICAL MATERIEL CORP.
MAMARONECK, NEW YORK

COIL, RF, TUNED, BAND 4
16-32 mc

DRAWN	CHECKED	FINAL APPROVAL
[illegible] 12/1/59	[illegible]	[illegible]
ELEC. DES. APP	MECH. DES. APP	CL-188 B

FORM 108-A