REQ. PER UNIT	USED ON MODEL	ASS'Y. NO.	DATE	CL-209	B
1	AO-101	AO-102			

ELECT. SPECS.

Total Ind- .95 -1.01 uhy

Q at test Freq - 90 or Greater

Freq. (Test) - 25 mc

MECH. SPECS.

Wire - #30 Magnet Wire

Core - Powdered Iron

Form - Phenolic

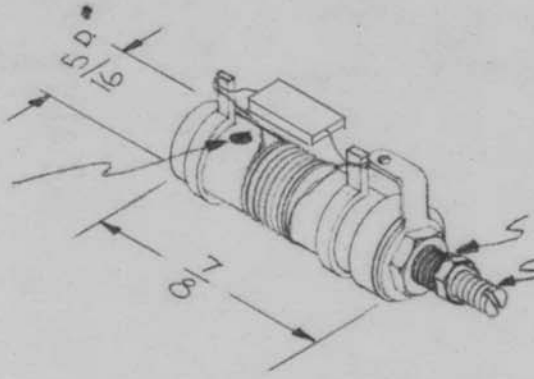



Hardware Supplied -

One ea. 3-48 Hex Locking Nut
One ea. 8-32 Hex Mtg. Nut
One ea. #8 Internal Lockwasher

} Brass, Nickel Plate

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
B		Q WAS 100	7-22-66	16619	RME		
A	6	Q WAS 115	4-6-64	11159	A.M.		

TOLERANCES

DEC. DIM. ±
FRAC DIM. ±
ANGULAR DIM. ±

SCALE:

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL

STOCK SIZE

MATERIAL

TYPE & TEMPER | HEAT TREAT. SPEC.

FINISH & SPEC. NO.

THE TECHNICAL MATERIEL CORP.
MAMARONECK, NEW YORK

COIL, RF, TUNED,
12 MC

DRAWN	CHECKED	FINAL APPROVAL
	LG	

NPL	2A-1445-6

ELEC. DES. APP. | MECH. DES. APP.

CL-209 B

FORM 108-A