REQ. PER UNIT	USED ON			CL-227	A
	MODEL	ASS'Y. NO.	DATE		
2	CMO		4/18/60		

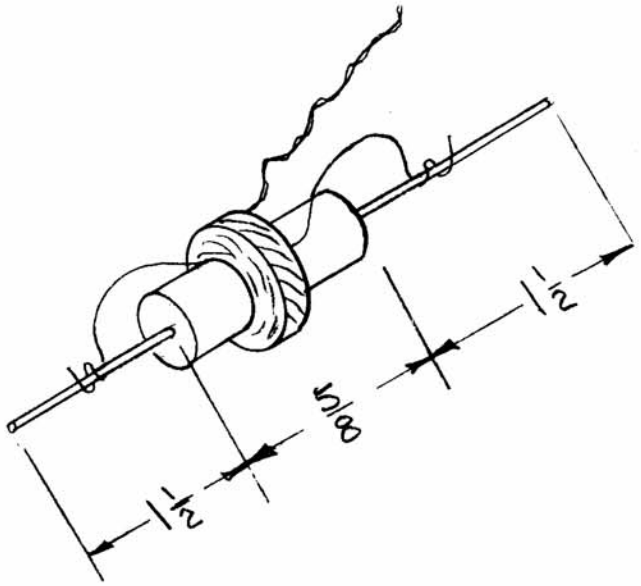

ELECTRICAL SPECS.

L - 500 μH ± 5%
Q - 90 OR GREATER
F - 790 KC

MECHANICAL SPEC.

CORE - POWDERED IRON
WINDING - 190 TURNS OF
#36 AWG DSB

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
A	1	ELEC SPEC. L ± 5% WAS 10 UH	5-3-61	4797	RU	JCK	

TOLERANCES

DEC. DIM. ±
FRAC. DIM. ± 1/64
ANGULAR DIM. ±

SCALE: 1A-1871

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
		—		

STOCK SIZE: —

MATERIAL: — | —

TYPE & TEMPER | HEAT TREAT. SPEC.

—

FINISH & SPEC. NO.

THE TECHNICAL MATERIEL CORP.
MAMARONECK, NEW YORK

COIL, RF, FIXED, 500 μHY

DRAWN	CHECKED	FINAL APPROVAL
CY		
ELEC. DES. APP	MECH. DES. APP	
G.R.F		

CL-227 | A