REQ. PER UNIT	USED ON MODEL	ASS'Y. NO.	DATE	CL-239	B
1	CHG-1		9-1-60		

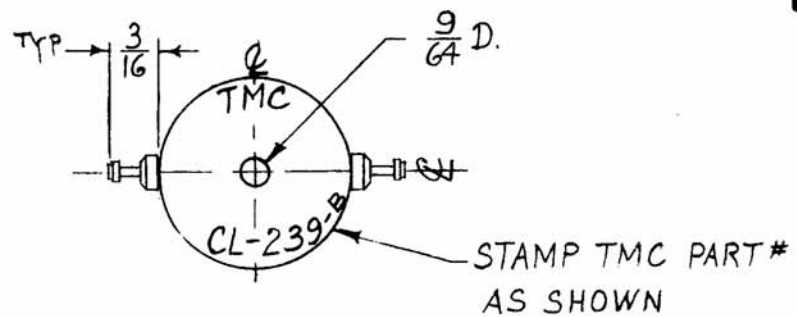

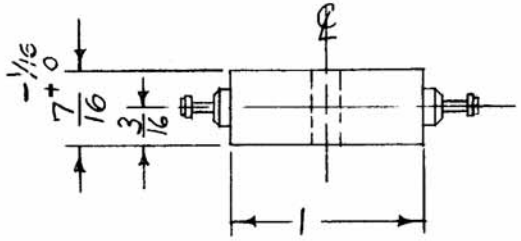

ELECTRICAL SPECIFICATION

INDUCTANCE : 2.5 μh 5%

Q : 200 OR GREATER AT 16MC

OPERATING RANGE : 9 - 16 MC.

ENCAPSULATED IN BLACK EPOXY

STANDARD DRAWING

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
B	1	Q WAS 250 OR GREATER 7/16 -1/16 +0 WAS 3/8	6/16/64	11587	A.M.	@	JC
A	1	ON ELECTRICAL SPEC. CHART "Q" WAS 250 AT 20MC OPERATIG RANGE WAS 9-20MC	7-14-61	5257	G.D.L	JCB	[illegible]

TOLERANCES

DEC. DIM. ±

FRAC. DIM. ± 1/64

ANGULAR DIM. ±

SCALE: S401-115 (6415)

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
			THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
			COIL, R.F.	

STOCK SIZE

MATERIAL

TYPE & TEMPER | HEAT TREAT. SPEC.

FINISH & SPEC. NO.

DRAWN: [illegible] | CHECKED: [illegible] | FINAL APPROVAL

ELEC. DES. APP: BSH | MECH. DES. APP

CL-239 | B

FORM 108-A