CL-266

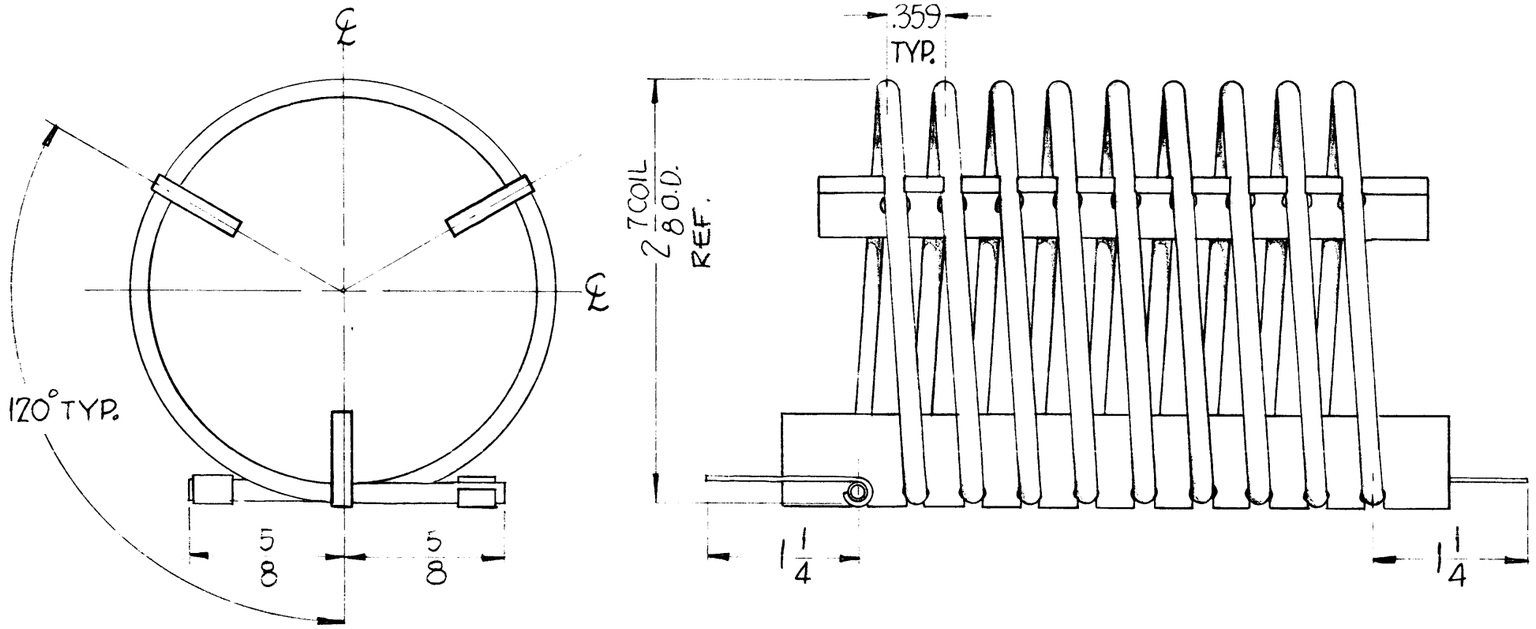

ELECTRICAL SPECIFICATIONS

3.9 μh ± 2%

Q = 350

FREQ = 1.9 Mcs

MECHANICAL SPECIFICATIONS

WOUND ON 2 ½" DIA. FORM.

FINISH ~ SILVER PLATE COILS .0003 THK.

THE TECHNICAL MATERIEL CORPORATION claims property rights in the subject matter disclosed hereon. This drawing is loaned as confidential engineering information only and may not be reproduced or used to manufacture anything shown hereon without permission from THE TECHNICAL MATERIEL CORPORATION to the user. This drawing is loaned for mutual assistance and is subject to recall at any time.

Engraved by

THE TECHNICAL MATERIEL CORPORATION
MAMARONECK, NEW YORK

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES

TOLERANCES ON

FRACTIONS ± 1/64 DECIMALS ± .005 ANGLES ± 1/2°

SCALE: 2A - 2057

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES

REQ. PER UNIT	MODEL	SECTION	ASS'Y. NO.	DATE
1	TER-3500-300			3-2-61

USED ON

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
			THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
STOCK SIZE			COIL, COMPENSATING 3.9 μh	
MATERIAL				
TYPE & TEMPER	HEAT TREAT. SPEC.		DRAWN: D. Dillon	CHECKER: Hale
FINISH & SPEC. NO.			ELEC. DES. APP.	MECH. DES. APP.
			FINAL APPROVAL: DB	CL-266

TMC FORM NO. 109

DEFIANCE NO. 1020