REQ. PER UNIT	USED ON			CL-339	A
	MODEL	ASS'Y. NO.	DATE		
4	GPT-200KAX-395	A-3258	4-21-64		

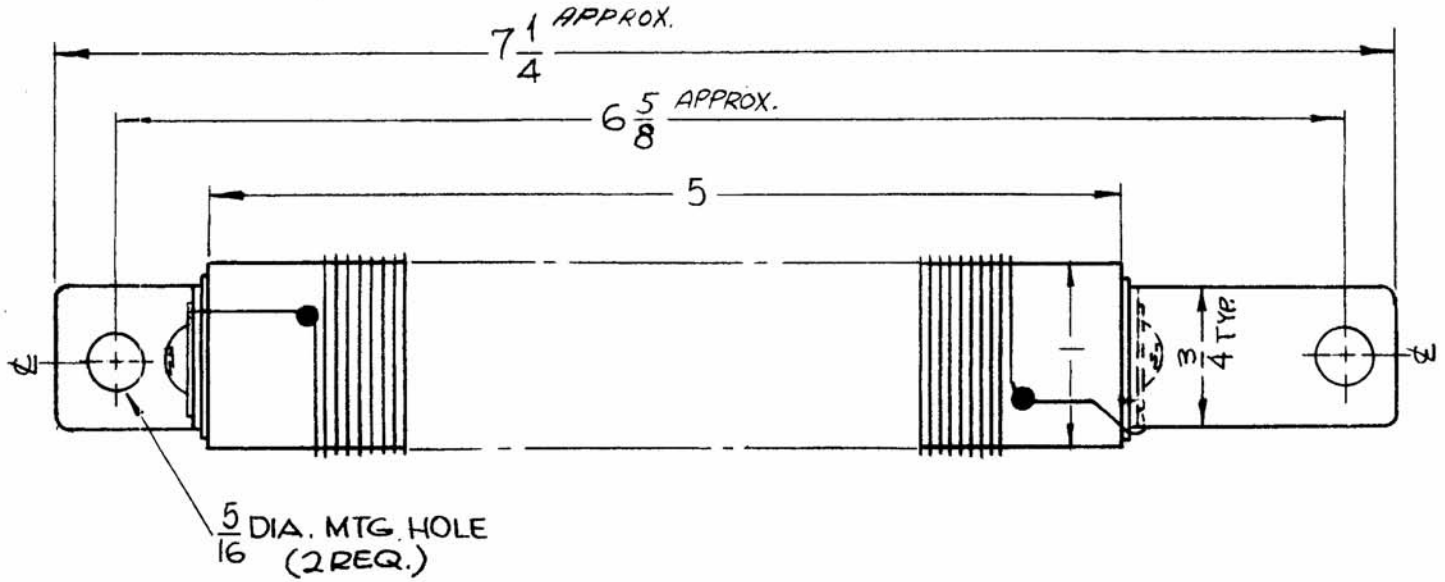

ELECTRICAL SPECS:

L ~ 35 uhy

Q ~ GREATER THAN 180

F ~ 2.5 mc.

MECHANICAL SPECS:

CERAMIC COIL FORM

73 TURNS NO. 17 CEROC. WIRE.



SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
A	6 5/8 WAS 6 1/2, ADD APPROX TO 7 1/4	3-6-67	17919	L A K.		
0	ORIG. RELEASE FOR PROD.	5-5-64		SRG		

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

TOLERANCES
DECIMALS .X ±.05, .XX ±.01, .XXX ±.005
FRACTIONS ± 1/64
ANGLES ± 0° 30'

SCALE 1"=1"

CODE 2A-3465-2

REQ.	ITEM	PART NO.	F. BUDETTI DESCRIPTION	SYMBOL

STOCK SIZE

MATERIAL

TYPE & TEMPER | HEAT TREAT. SPEC.

FINISH & SPEC. NO.

THE TECHNICAL MATERIEL CORP.
MAMARONECK. NEW YORK

COIL R.F. FIXED

DRAWN	CHECKED	FINAL APPROVAL
SRG		

ELEC. DES. APP.	MECH. DES. APP.	CL-339	A

TMC FORM 108-A

REPROVEL NO. 440H 1610c