REQ. PER UNIT	USED ON MODEL	ASS'Y. NO.	DATE	CL366	C
1	TLAA-2.5K		10-24-66		
1	RFTA-1		10-24-66		

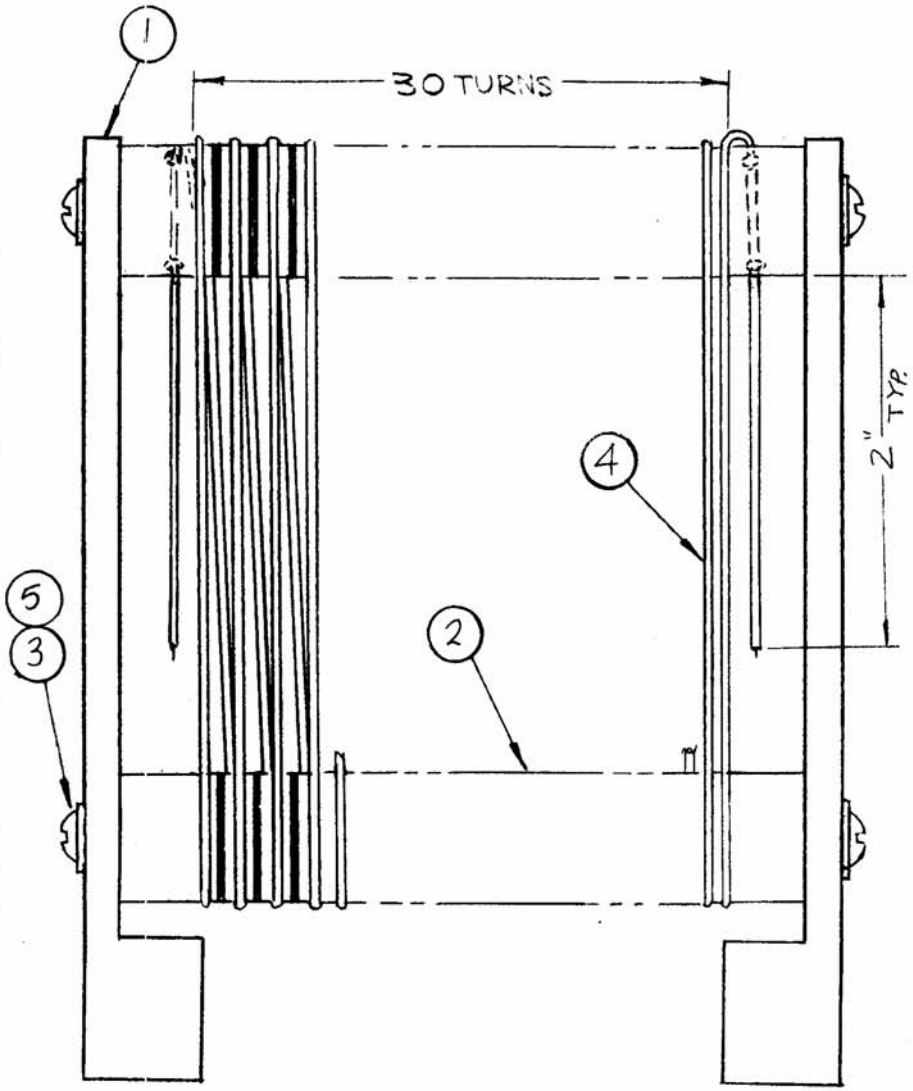

SPECIFICATIONS:
L - 23μH ±10% @ 2.5MC
BOONTON 260A Q METER
Q - 150 MIN.

4	5	WA109-54	WASHER, FIBER	
X	4	WI147-4	WIRE, ELECT, TEFLON	
4	3	SC143-1032-B8	SCREW, MACHINE, NYLON	
2	2	PX905	SPACER, COIL	
2	1	PX904	SUPPORT, COIL	
REQ.	ITEM	PART NO.	F. BUDETTI DESCRIPTION	SYMBOL

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
C	TURNS WERE 32. "L" WAS 26.0 μH	3/17/67	17997	RME		
B	WIRING REVISED; "L-26.0---" WAS "L-31.2---"	1-26-67	17717	WM		
A	REDRAWN & REVISED	10-24-66	17123			

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

SCALE 1:1

TOLERANCES
DECIMALS .X ±.05, .XX ± .01, .XXX ±.005
FRACTIONS ± 1/64
ANGLES ± 0° 30'

CODE A

STOCK SIZE

MATERIAL

TYPE & TEMPER | HEAT TREAT. SPEC.

FINISH & SPEC. NO.

THE TECHNICAL MATERIEL CORP.
MAMARONECK. NEW YORK

COIL, RF

DRAWN | CHECKED | FINAL APPROVAL

ELEC. DES. APP. | MECH. DES. APP.

CL366 C

TMC FORM 108-A

REPROVEL NO. 440H 23645