
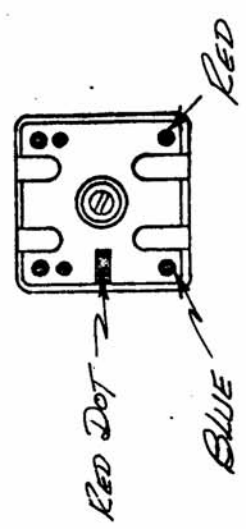



REQ. PER UNIT: 1
 MODEL: CMRA-1
 ASSY. NO.: A4216
 DATE: 5-17-65
 USED ON: CL375
 SYMBOL: B




ELECTRICAL SPECS.
 (W/O SLUG)
 OPERATING FREQUENCY:
 INDUCTANCE @ 250 KHZ
 PRIMARY: 2.0 MH ± 0.2 MH

"Q" (PRIMARY) @ 250 KHZ MIN 20

MECHANICAL SPEC.

TURNS
 PRIMARY: 625

COLOR CODE: RED
 CASE: COPPER CAN
 CASE FINISH: TIN-PLATED
 QUANTITY TERM: 4
 MATERIAL: POWDERED IRON
 CORE & SLUG: POWDERED IRON



SCHEMATIC DIAGRAM

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
1	—	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	B
2	—	COIL, RF, ADJ.	
3	—	SYN. A-13	
4	HLA	CHECKED	HLA
5	—	DRAWN	—
6	—	ELEC. DES. APP.	—
7	—	MECH. DES. APP.	—
8	—	FINISH & SPEC. NO.	CL375
9	—	HEAT TREAT. SPEC.	—
10	—	TYPE & TEMPER	—
11	—	MATERIAL	—
12	—	STOCK SIZE	—
13	—	POSE	—
14	—	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	B

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
B	REL. 375" STAMPED ON TOP VIEW	12.6.66	17374	WHD	—	—
A	PRY. IND WAS 2.2 MH ADDED 250KHZ MIN20 (Q)	7/18/66	16571	RME	—	—
Ø	ORIGINAL RELEASE FOR PRODUCTION	5/21/65	—	HLA	—	—
X	EXPER. RELEASE	5/17/65	X	HLA	—	—

UNLESS OTHERWISE SPECIFIED
 DIMENSIONS ARE IN INCHES AND INCLUDE
 CHEMICALLY APPLIED OR PLATED FINISHES

TOLERANCES

FRACTIONS
 ± 1/64
 ANGLES
 ± 0° 30'

DECIMALS
 X ± .05
 XX ± .01
 XXX ± .005

SCALE

CODE A

2A4763