REQ. PER UNIT	USED ON			CL381	A
	MODEL	ASS'Y. NO.	DATE		
2	TSTE-10K	A4293	6-2-65		

HOLES:

A - 3/16 DIA. (2 REQ.

B - 7/32 X 3/8 SLOT (1 REQ)

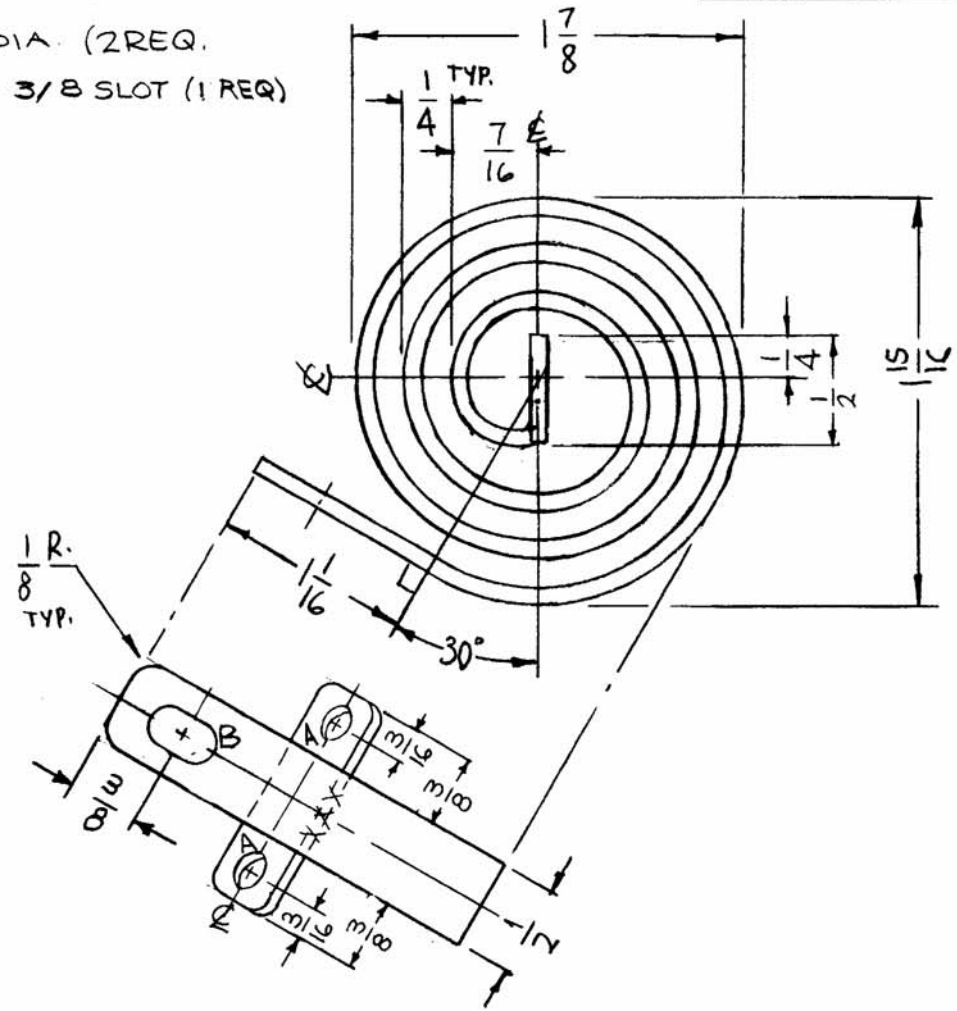

SPECIFICATIONS:

IND: .26 UH ± 3%

NOTE:

- SOLDER TOGETHER AS SHOWN.
- ROUND ALL EDGES

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
A	"B" HOLE WAS 15/64	10/6/66	16985	RME	JCB	
Ø	ORIGINAL RELEASE FOR PROD.	4/13/66	Ø	HLA		

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

SCALE —

TOLERANCES
DECIMALS .X ±.05 .XX ±.01 .XXX ±.005
FRACTIONS ± 1/64 ANGLES ± 0° 30'

CODE A

REQ.	ITEM	PART NO.
		1/2 X .091 THICK

STOCK SIZE

COPPER

MATERIAL

COLD ROLLED | TYPE & TEMPER

HEAT TREAT. SPEC:

S245 SILVER PLATE
S423 SILVER KOTE

FINISH & SPEC. NO.

F. BUDETTI DESCRIPTION

SYMBOL

THE TECHNICAL MATERIEL CORP.
MAMARONECK. NEW YORK

COIL, RF

DRAWN	CHECKED	FINAL APPROVAL
AKH	JCB	
ELEC. DES. APP.	MECH. DES. APP.	CL381 A
RB	JCB	

TMC FORM 108-A

REPROVEL NO. 440H 23845