REQ. PER UNIT	USED ON			CL382	A
	MODEL	ASS'Y. NO.	DATE		
2	TSTE-10K	A 4293	6-2-65		

HOLES

A-3/16 DIA.

B-7/32 X 3/8 SLOT

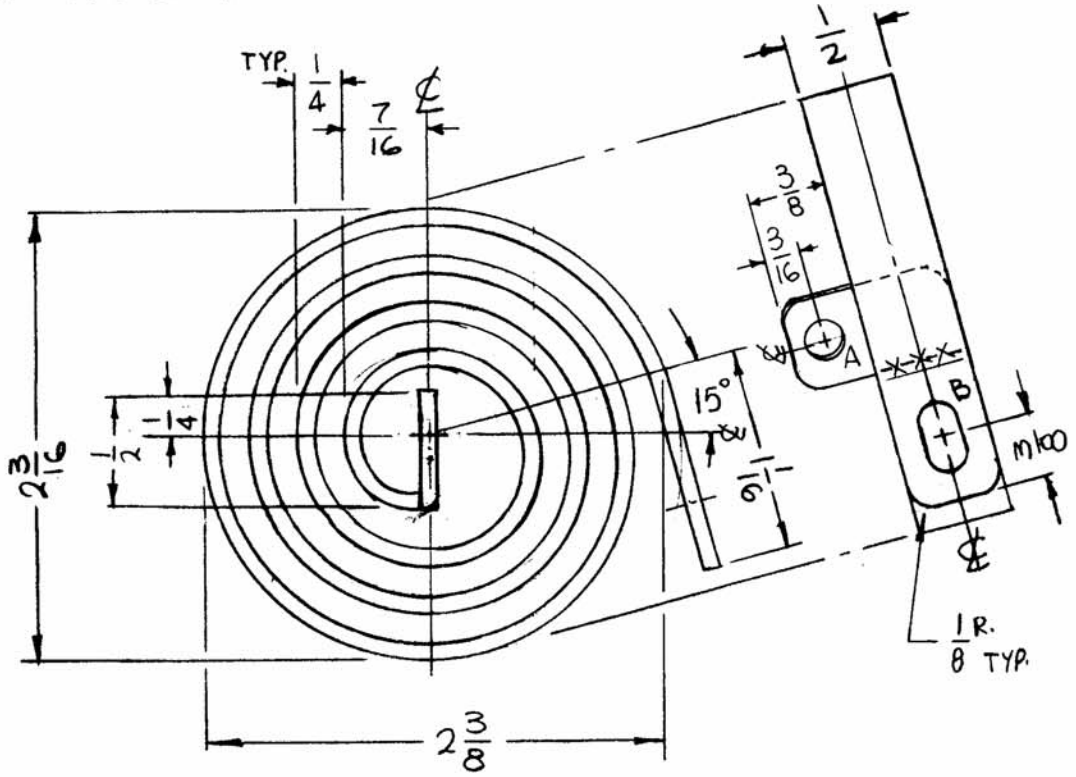

SPECIFICATIONS:

IND: .4 UH ± 3%

NOTE:
- SOLDER TOGETHER AS SHOWN.
- ROUND ALL EDGES.

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
A	"B" HOLE WAS 15/64	10/6/66	16985	RME		
Ø	ORIGINAL RELEASE FOR PROD.	4/13/66	Ø	HLA		

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES AND INCLUDE
CHEMICALLY APPLIED OR PLATED FINISHES

SCALE —

TOLERANCES
DECIMALS .X ±.05, .XX ±.01, .XXX ±.005
FRACTIONS ± 1/64
ANGLES ± 0° 30'

CODE A

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
		1/2 X .091 THICK	F. BUDETTI	

STOCK SIZE: COPPER

MATERIAL: COLD ROLLED

TYPE & TEMPER / HEAT TREAT. SPEC.: S245 SILVER PLATE, S423 SILVER KOTE

FINISH & SPEC. NO.

THE TECHNICAL MATERIEL CORP.
MAMARONECK. NEW YORK

COIL, RF

DRAWN	CHECKED	FINAL APPROVAL

ELEC. DES. APP.	MECH. DES. APP.	CL382	A

TMC FORM 108-A

REPROVEL NO. 440H

23845