REQ. PER UNIT	USED ON MODEL	ASS'Y. NO.	DATE		
1	TLAA-2.5K	AS497	11-1-66	CL413	B

ELEC. SPECS

L = 670 μh MIN.
1300 μh MAX.

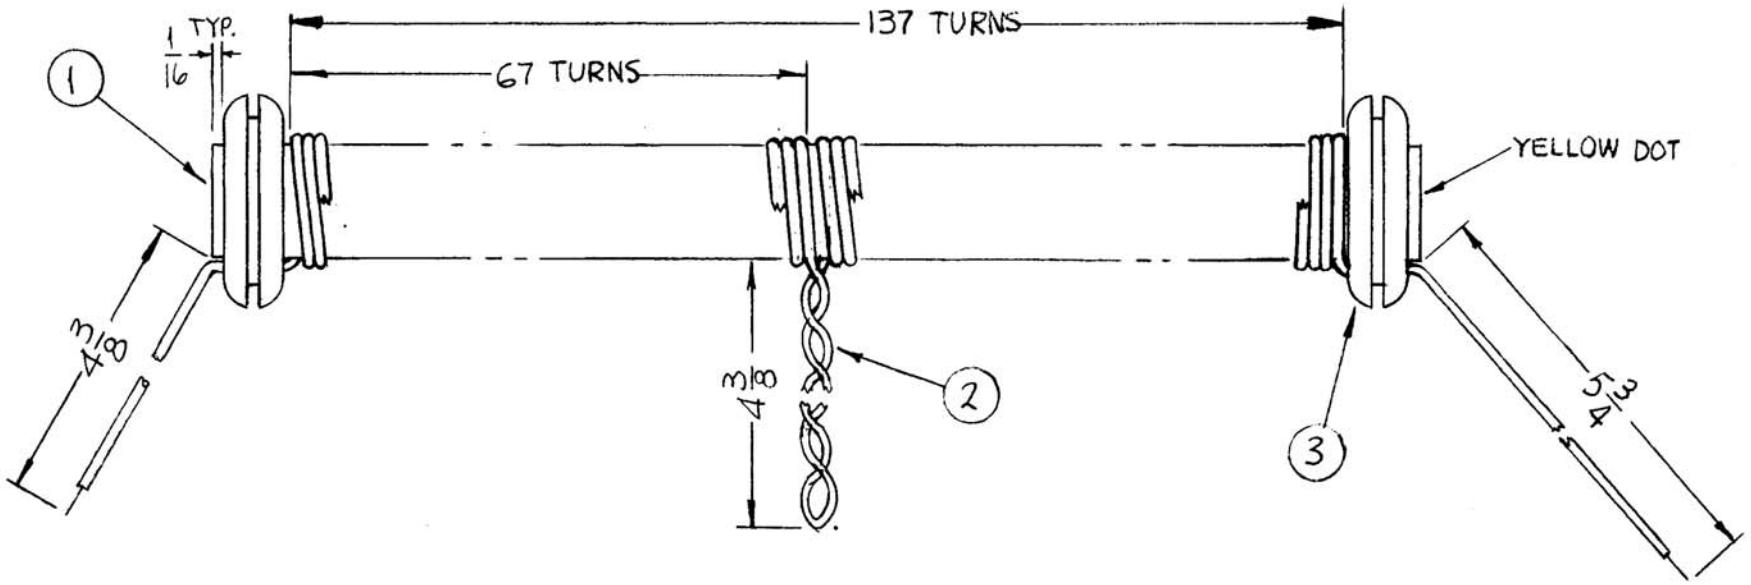

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
2	3	EY102-8	GROMMET, RUBBER	
X	2	WI147-3	WIRE, ELEC. TEFLON	
1	1	CI112-Q2-6R375-L	CORE, ROD	

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
B	ADD. L-ETC. ON ELEC. SPECS	2.19.69	19230	GE		FB
A	67 TURNS WAS CLOCK-WISE. IT. 1 WAS CI112-Q1	2.17.67	17799	RME		
Ø	ORIGINAL RELEASE FOR PRODUCTION	11/18/66	Ø			
X	EXP. RELEASE	11-2-66	X			

F. BUDETTI

THE TECHNICAL MATERIEL CORP.
MAMARONECK. NEW YORK

COIL, RF

STOCK SIZE

MATERIAL

TYPE & TEMPER | HEAT TREAT. SPEC.

FINISH & SPEC. NO.

DRAWN | CHECKED | FINAL APPROVAL

ELEC. DES. APP. | MECH. DES. APP.

M/L

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

SCALE 1:1

TOLERANCES
DECIMALS .X ±.05 .XX ± .01 .XXX ±.005
FRACTIONS ± 1/64
ANGLES ± 0° 30'

CODE A

CL413 B

TMC FORM 108-A

REPROVEL NO. 440H 23845