


STANDARD DRAWING

REQ. PER UNIT	USED ON
	MODEL
	ASS'Y. NO.
	DATE
	4-12-61

CN 113 B

TMC PART NO.	MFGR. PART NO.	CAPACITY IN UJF	CAP. TOL.	VOLTAGE WVDC	SIZE
CN 113-1	25-503D	.05	± 5%	400	DIA. LENGTH
					.290 11/16

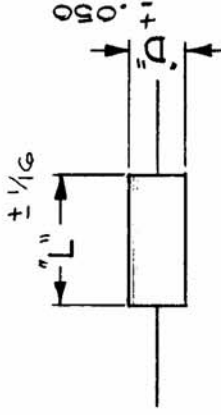

SPECIFICATIONS

OPERATING TEMP. RANGE: -55 TO +85°C AT RATED VOLTAGE; TO 125°C WITH 50% DERATING
 DISSIPATION FACTOR: 1.0% AT 1 KC ± 20 CPS AT 25°C, MAXIMUM.
 DIELECTRIC STRENGTH: 200% RATED VOLTAGE AT 25°C FOR 60 SECONDS THRU LIMITING RESISTOR OF 100 OHM/VOLT.

CASE: EPOXY RESIN.

LIFE TEST: 125% RATED VOLTAGE AT 85°C FOR 250 HRS.

REQ. ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
B	ADD. LIFE TEST ADD. "L" & "D" TOLS. COMPLETELY REVISED SPECIFICATIONS	4-4-67	18035	HGA	Wb	apr			THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
A	MFGR. P/N WAS TYPE 20, .05, 5% 400V	5/26/64	113	A.M.	@	pc			CAPACITOR, FIXED MYLAR DIELECTRIC	
ISSUE ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
TOLERANCES DEC. DIM. ± FRAC. DIM. ± ANGULAR DIM. ±							TYPE & TEMPER. HEAT TREAT. SPEC. DRAWN CHECKED FINAL APPROVAL			
SCALE: S401-87 (TYPE 25) MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES							MATERIAL FINISH & SPEC. NO.			
N.D.F.							ELEC. DES. APP. MECH. DES. APP.			
CN 113 B							CN 113 B			