


REQ. PER UNIT	1	MODEL	SBE-2	USED ON	CR-112	A
ASSY. NO.	A-1516	DATE	3-24-64			

SPECIFICATIONS

FREQUENCY: 17.000KC
 FREQUENCY TOTAL AT 70°C + .005%
 FREQUENCY DEVIATION FROM: 65°C - 75°C : + .001%.
 RESONANCE: SERIES
 DRIVE LEVEL: 0.1 MW
 SERIES RESISTANCE: 120K OHMS MAX.
 HOLDER TYPE: HC-13/U
 * MARKING: MARKING SHALL BE IN ACCORDANCE WITH MIL-C-3098. UNITS SHALL BE MANUFACTURED IN ACCORDANCE WITH MIL-C-3098.

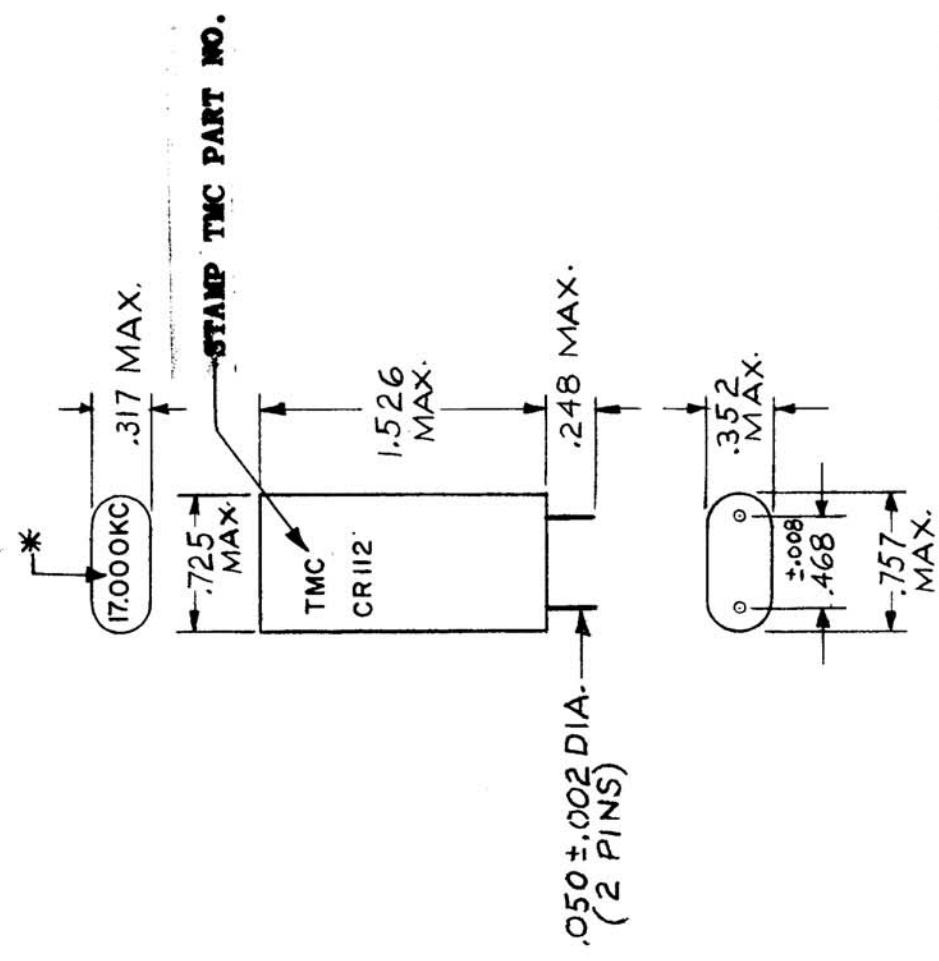

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
		THE TECHNICAL MATERIEL CORP. MAMARONECK. NEW YORK	
		CRYSTAL UNIT QUARTZ (17KC, 70°C)	
		A.M. @ 3-25-64	4-2-64
		DRAWN	FINAL APPROVAL
		TYPE & TEMPER	HEAT TREAT. SPEC.
		FINISH & SPEC. NO.	
		5401-96 (JKNH17T-45)	
		DATE	CH. NO.
		15009	AM
		14/20/65	
		ORIGINAL RELEASE FOR PROD.	4-2-64
		EXPERIMENTAL RELEASE	3-25-64
		DESCRIPTION	
		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES	
		TOLERANCES	
		FRACTIONS	
		DECIMALS	
		±.05	
		.XX ± .01	
		.XXX ± .005	
		SCALE	
		CODE	
		C	
		CH. NO.	
		DRAFTS	
		CHECKER	
		ENG. APP.	