TMC P/N	MFG. P/N	OPER. VOLT	MAX.REV.VOLT	COLOR
DD114-1	122654-001	33VDC MAX.	LESS THAN 1VDC	GREEN
DD114-2	122655-001	80 TO 200VDC MAX.	LESS THAN 1VDC	BLACK

REQ. PER UNIT	USED ON MODEL	ASS'Y. NO.	DATE
	TSTE-10K		6-15-65

DD114 Ø

STANDARD DRAWING

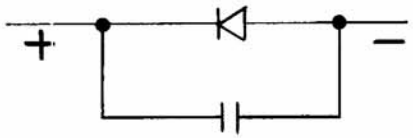





NOTE:
CONNECT IN PARALLEL WITH INDUCTIVE LOAD. OBSERVE POLARITY.

RED DOT INDICATES POSITIVE POLARITY

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
Ø	ORIGINAL RELEASE FOR PRODUCTION	5.25.65	-AA-	ALH		

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

SCALE

DECIMALS .X ±.05 .XX ±.01 .XXX ±.005 TOLERANCES FRACTIONS ± 1/64 ANGLES ± 0° 30'

CODE C

S401-281

REQ.	ITEM	PART NO.	BUDETTI DESCRIPTION	SYMBOL

STOCK SIZE

MATERIAL

TYPE & TEMPER | HEAT TREAT. SPEC. | FINISH & SPEC. NO.

THE TECHNICAL MATERIEL CORP.
MAMARONECK. NEW YORK

SUPPRESSOR, ARC, DIODE

DRAWN	CHECKED	FINAL APPROVAL
HLA		6/17/65

ELEC. DES. APP. 6/16-65 | MECH. DES. APP.

DD114 Ø

TMC FORM 108-A

REPROVEL NO. 440H 23645