REQ. PER UNIT	USED ON MODEL	ASS'Y. NO.	DATE	DD124	A
1	AP126		3.26.65		

STANDARD DRAWING

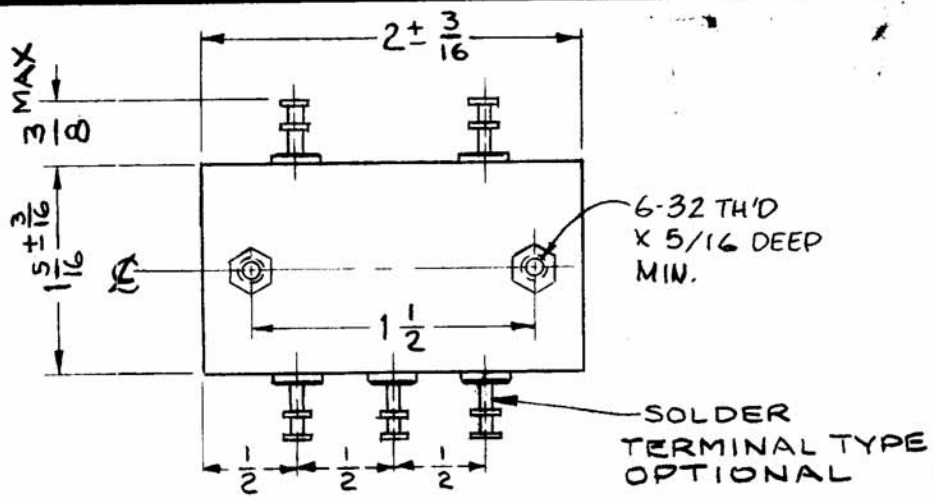

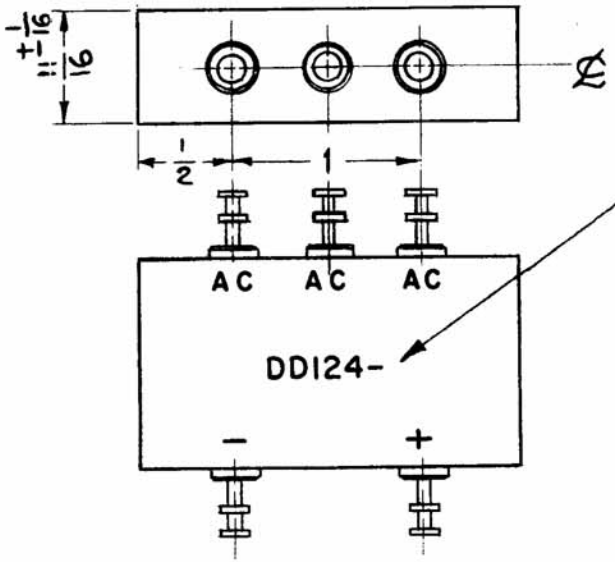

ELECTRICAL SPECIFICATIONS

AVERAGE CURRENT: 1.5A @ 75°C
NON-RECURRENT SURGE: 10A @ 75°C
PEAK REVERSE VOLTAGE: 2KV

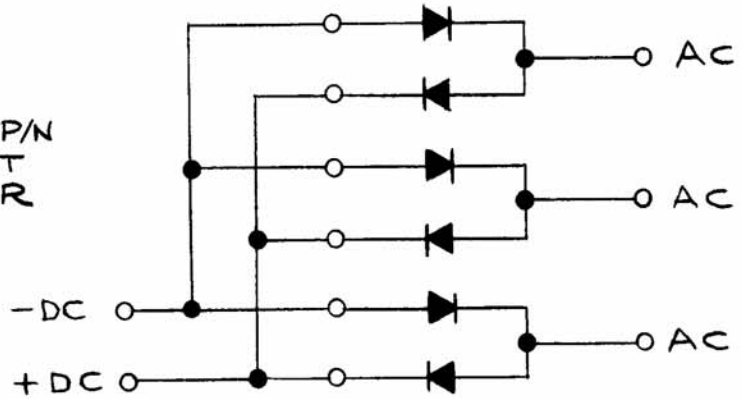

SCHEMATIC

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
A	ADDED S401-402	4/3/68	C.C.	HG.		RH
Ø	ORIGINAL RELEASE FOR PRODUCTION	4/8/65	AA	SEG		
X1	OUTPUT 800VDC DELETED, S401-98 WAS S401-303, 6-32 x 5/16 DP ADDED	4-8-65	M	HLA		

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

SCALE 1:1

TOLERANCES: DECIMALS .X ±.05, .XX ±.01, .XXX ±.005; FRACTIONS ± 1/64; ANGLES ± 0° 30'

CODE: S401-98, S401-329, S401-402

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
			F. BUDETTI	

STOCK SIZE

MATERIAL

TYPE & TEMPER | HEAT TREAT. SPEC.

FINISH & SPEC. NO.

THE TECHNICAL MATERIEL CORP.
MAMARONECK. NEW YORK

RECTIFIER, SCOND DEV.
(3 PHASE)

DRAWN	CHECKED	FINAL APPROVAL
JCB	JCB	May 4/8/65

ELEC. DES. APP. | MECH. DES. APP.

DD124 A

TMC FORM 108-A

REPROVEL NO. 440H 23845