REQ. PER UNIT	USED ON MODEL	ASS'Y. NO.	DATE	DD 129	A
1	AP-126		8-26-65		

STANDARD DRAWING

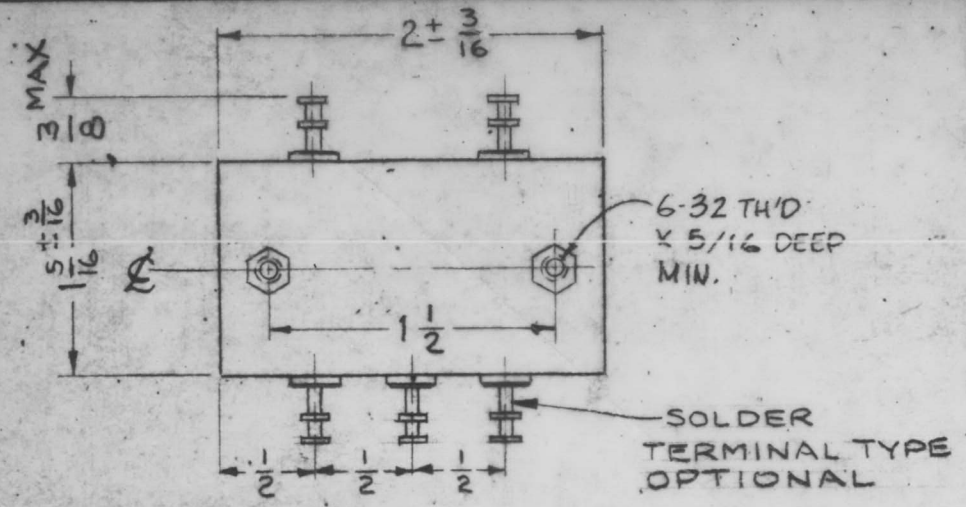

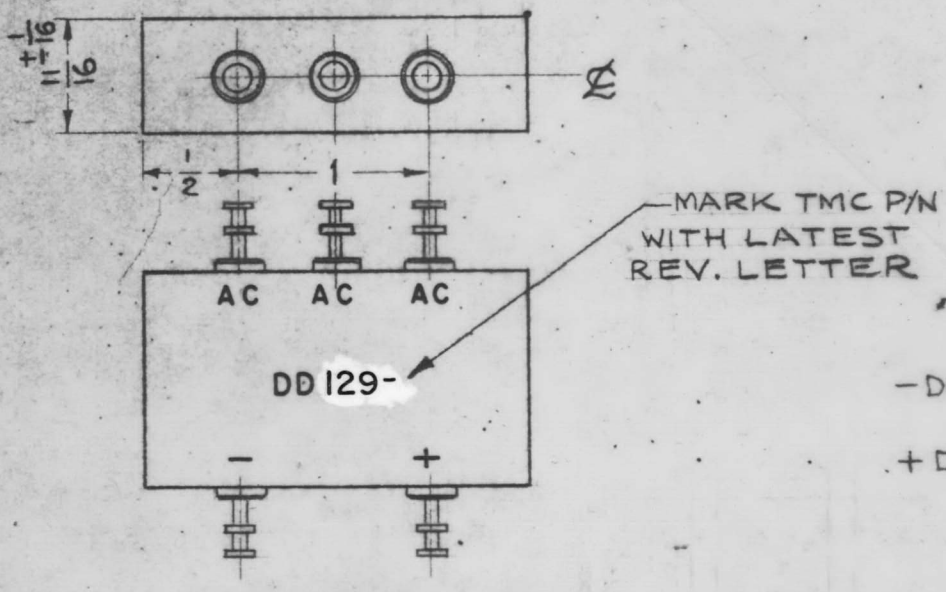

ELECTRICAL SPECIFICATIONS

AVERAGE CURRENT: 1.5 A @ 75°C

NON-RECURRENT SURGE: 20 A @ 75°C

PEAK REVERSE VOLTAGE: 4 KV

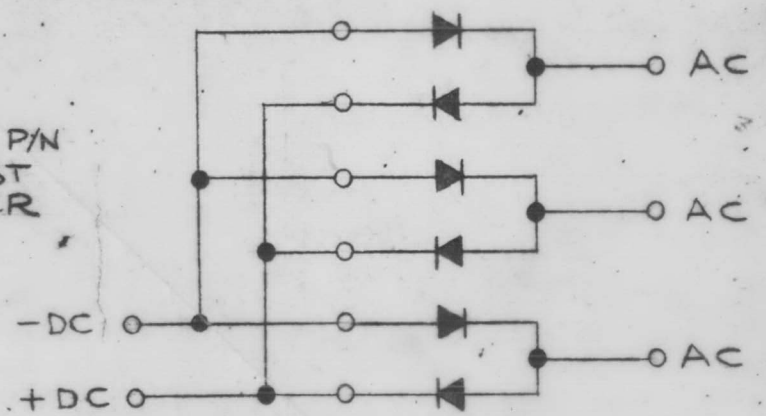

SCHEMATIC

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
A	ADDED S401-402	4/3/68	C.C.	HG.		RH
Ø	ORIGINAL RELEASE	5-6-66	Ø	HG		

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

SCALE 1:1

TOLERANCES: DECIMALS .X ±.05, .XX ±.01, .XXX ±.005; FRACTIONS ± 1/64; ANGLES ± 0° 30'

CODE: S401-98, S401-329, S401-402

REQ.	ITEM	PART NO.

STOCK SIZE

MATERIAL

TYPE & TEMPER | HEAT TREAT. SPEC.

FINISH & SPEC. NO.

F. BUDETTI DESCRIPTION SYMBOL

THE TECHNICAL MATERIEL CORP.
MAMARONECK. NEW YORK

RECTIFIER, SCOND DEV.
(3 PHASE)

DRAWN	CHECKED	FINAL APPROVAL

ELEC. DES. APP.	MECH. DES. APP.
5-6-66	

DD 129 A

TMC FORM 108-A

REPROVEL NO. 440H