


APPLICATION			REVISIONS						
QTY	MODEL USED ON	ASS'Y NO.	LTR	DESCRIPTION	DATE	E.M.N.NO	DRAFT	CHKD	APPD
	SPT3K/VHF	AP137	Ø	ORIG RELEASE FOR PROD	4.16.69	—	CV		

MFR (TMC CODE NO.): S401-40

MFR CATALOG NUMBER: TD714

SPECIFICATIONS

PEAK CURRENT:
 Ip (mA): 2.2
 TOL (ma): .20
 MAX TOL CAP: 25pf
 MIN Ip/Iv: 8.0

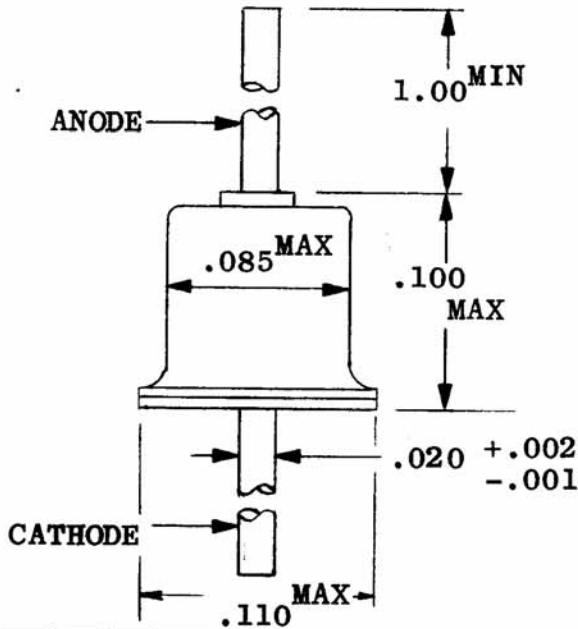

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		REQ'D	ITEM	PART NUMBER	DESCRIPTION	SYM.
LIST OF MATERIAL						
DECIMALS: .X ± .05, .XX ± .01, .XXX ± .005 FRACTIONS: 1/64 TOLS. ANGLES: 0°-30°		FINAL APPROVAL	DATE	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK <i>SEMI-CONDUCTOR DEVICE, DIODE</i>		
MATERIAL	MECH. DES.	DATE				
FINISH	ELECT. DES.	DATE				
	CHECKED	DATE				
	DRAWN	DATE				
NOTICE TO PERSONS RECEIVING THIS DRAWING THE TECHNICAL MATERIEL CORPORATION claims proprietary right in the material disclosed hereon. This drawing is issued in confidence for engineering information only and may not be reproduced or used to manufacture anything shown hereon without permission from THE TECHNICAL MATERIEL CORPORATION to the user. This drawing is loaned for mutual assistance and is subject to recall at any time.		SIZE	CODE IDENT. NO.	DWG NO.	ISSUE	
		A	82679	DD 8004	Ø	
SCALE			SHEET		OF	