| REQ. PER UNIT | USED ON MODEL | ASS'Y. NO. | DATE | DI-101 |
|---|---|---|---|---|
| 4 | MNF-1 | DI-101-1 | 2-10-64 | |

| TMC PART NO. | SHAFT LENGTH | A | B | C | D | E DIA | F DIA | G DIA. |
|---|---|---|---|---|---|---|---|---|
| DI-101-1 | 1/2 | 1-3/32 | .125 | — | .375 | $.250^{+.000}_{-.003}$ | $.250^{+.002}_{-.000}$ | .500 |

-SPECIFICATIONS-
MATERIAL & FINISH:
SHAFT: BRASS
MOUNTING: STEEL & CADMIUM PLATE
OUTPUT TORQUE: 15-20 IN OZ
REDUCTION RATIO: 6-1

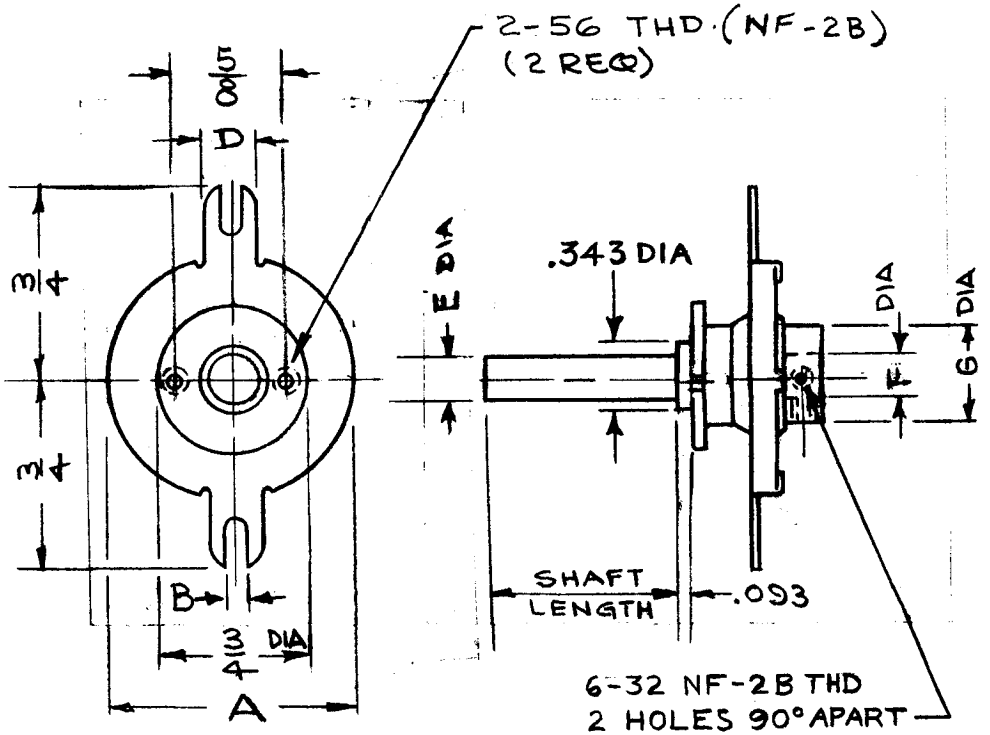


| SYM | DESCRIPTION | DATE | CH. NO. | DRAFTS | CHECKER | ENG. APP. |
|---|---|---|---|---|---|---|
| | | | | | | |
| | | | | | | |
| | | | | | | |

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

SCALE —

TOLERANCES
DECIMALS .X ±.05 .XX ±.01 .XXX ±.005
FRACTIONS ± 1/64 ANGLES ± 0° 30'

CODE C

S401-262 (4511 DAF)

| REQ. | ITEM | PART NO. | DESCRIPTION | SYMBOL |
|---|---|---|---|---|
| | | | | |

STOCK SIZE —

MATERIAL —

TYPE & TEMPER | HEAT TREAT. SPEC.

FINISH & SPEC. NO.

THE TECHNICAL MATERIEL CORP.
MAMARONECK. NEW YORK

DRIVE, REDUCTION, BALL

| DRAWN | CHECKED | FINAL APPROVAL |
|---|---|---|
| 1/24/64 | TR 2/14/64 | RJC 2/21/64 |

| ELEC. DES. APP. | MECH. DES. APP. | |
|---|---|---|
| 2/10/64 | 2/10/64 | DI-101 |

TMC FORM 108-A

STOCK NO. 440H