

IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.


MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES

STANDARD DRAWING

FX10004
1 OF 2

MODEL	PROJECT NO.	ASSY. NO.	DATE
TIS 2			APR 9/59


USED ON

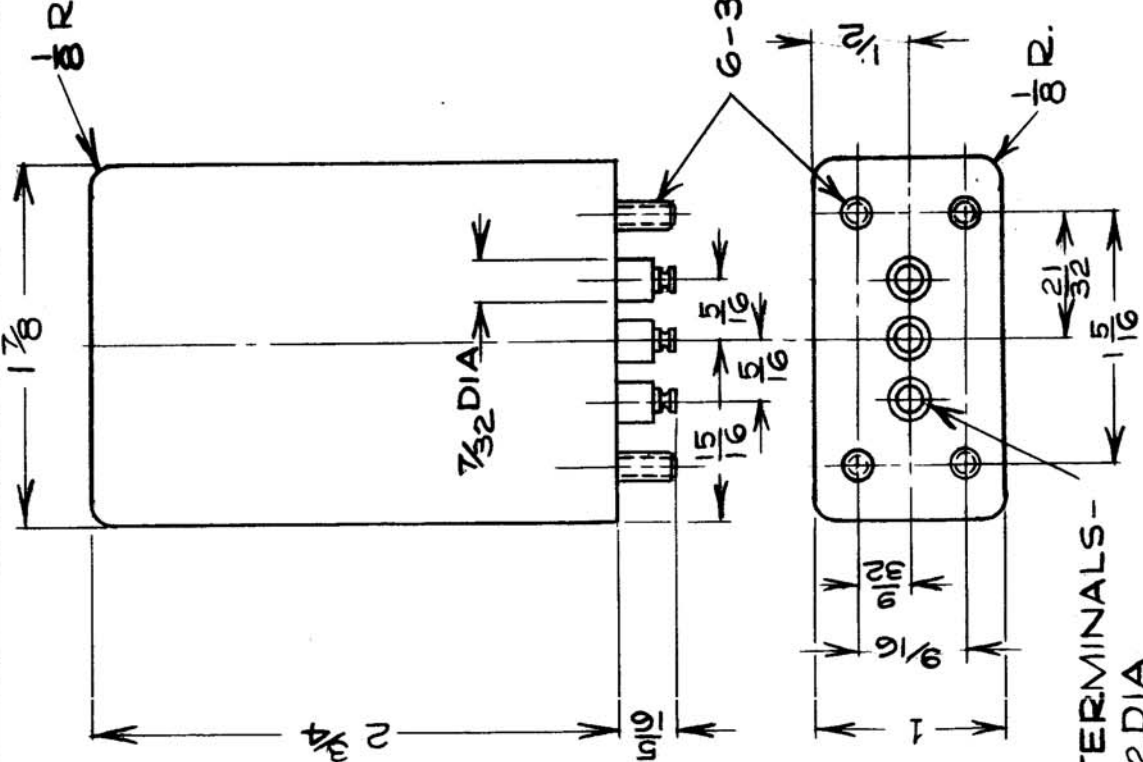

B.O.F.R. COMMUNICATION ACCESSORIES CO.
 AS: PART N^o 90115B
 LOW PASS FILTER
 CLASS A, GRADE 1, FC=3000 CPS
 IMPEDANCE: INPUT-600 OHMS
 OUTPUT-600 OHMS
 INPUT LEVEL: 10 MW MAX AC
 10 MA MAX DC
 LEVEL AT 4000 CYCLES SHOULD BE
 -30 DB RELATIVE TO LEVEL AT
 3000 CYCLES
 FINISH NOTE:
 DEGREASE
 5-114 - ZINC CHROMATE PRIMER
 5-153 - SMOOTH GREY ENAMEL
 AIR DRYING

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
		TMC (Canada) LIMITED OTTAWA	
		LOW PASS FILTER	
		FC=3000 CPS	
		DCM	
		DRAWN	
		ELEC. DES. APP.	
		MECH. DES. APP.	
		CHECKED	
		FINAL APPROVAL	
		SEE NOTE	
		FINISH & SPEC. NO.	
		FX10004	

ISSUE ITEM	CHANGED FROM	DATE	CN. NO.	DRAFTS CHECKER	ENG. APP.
TOLERANCES					
SCALE					
DRILL, PUNCH, COMMERCIAL STOCK SIZES AND MANUFACTURERS TOLERANCES ARE NOT INCLUDED.					
ALL	DEC. DIM. \pm				
OTHERS	FRAC. DIM. \pm				
	ANGULAR DIM. \pm				

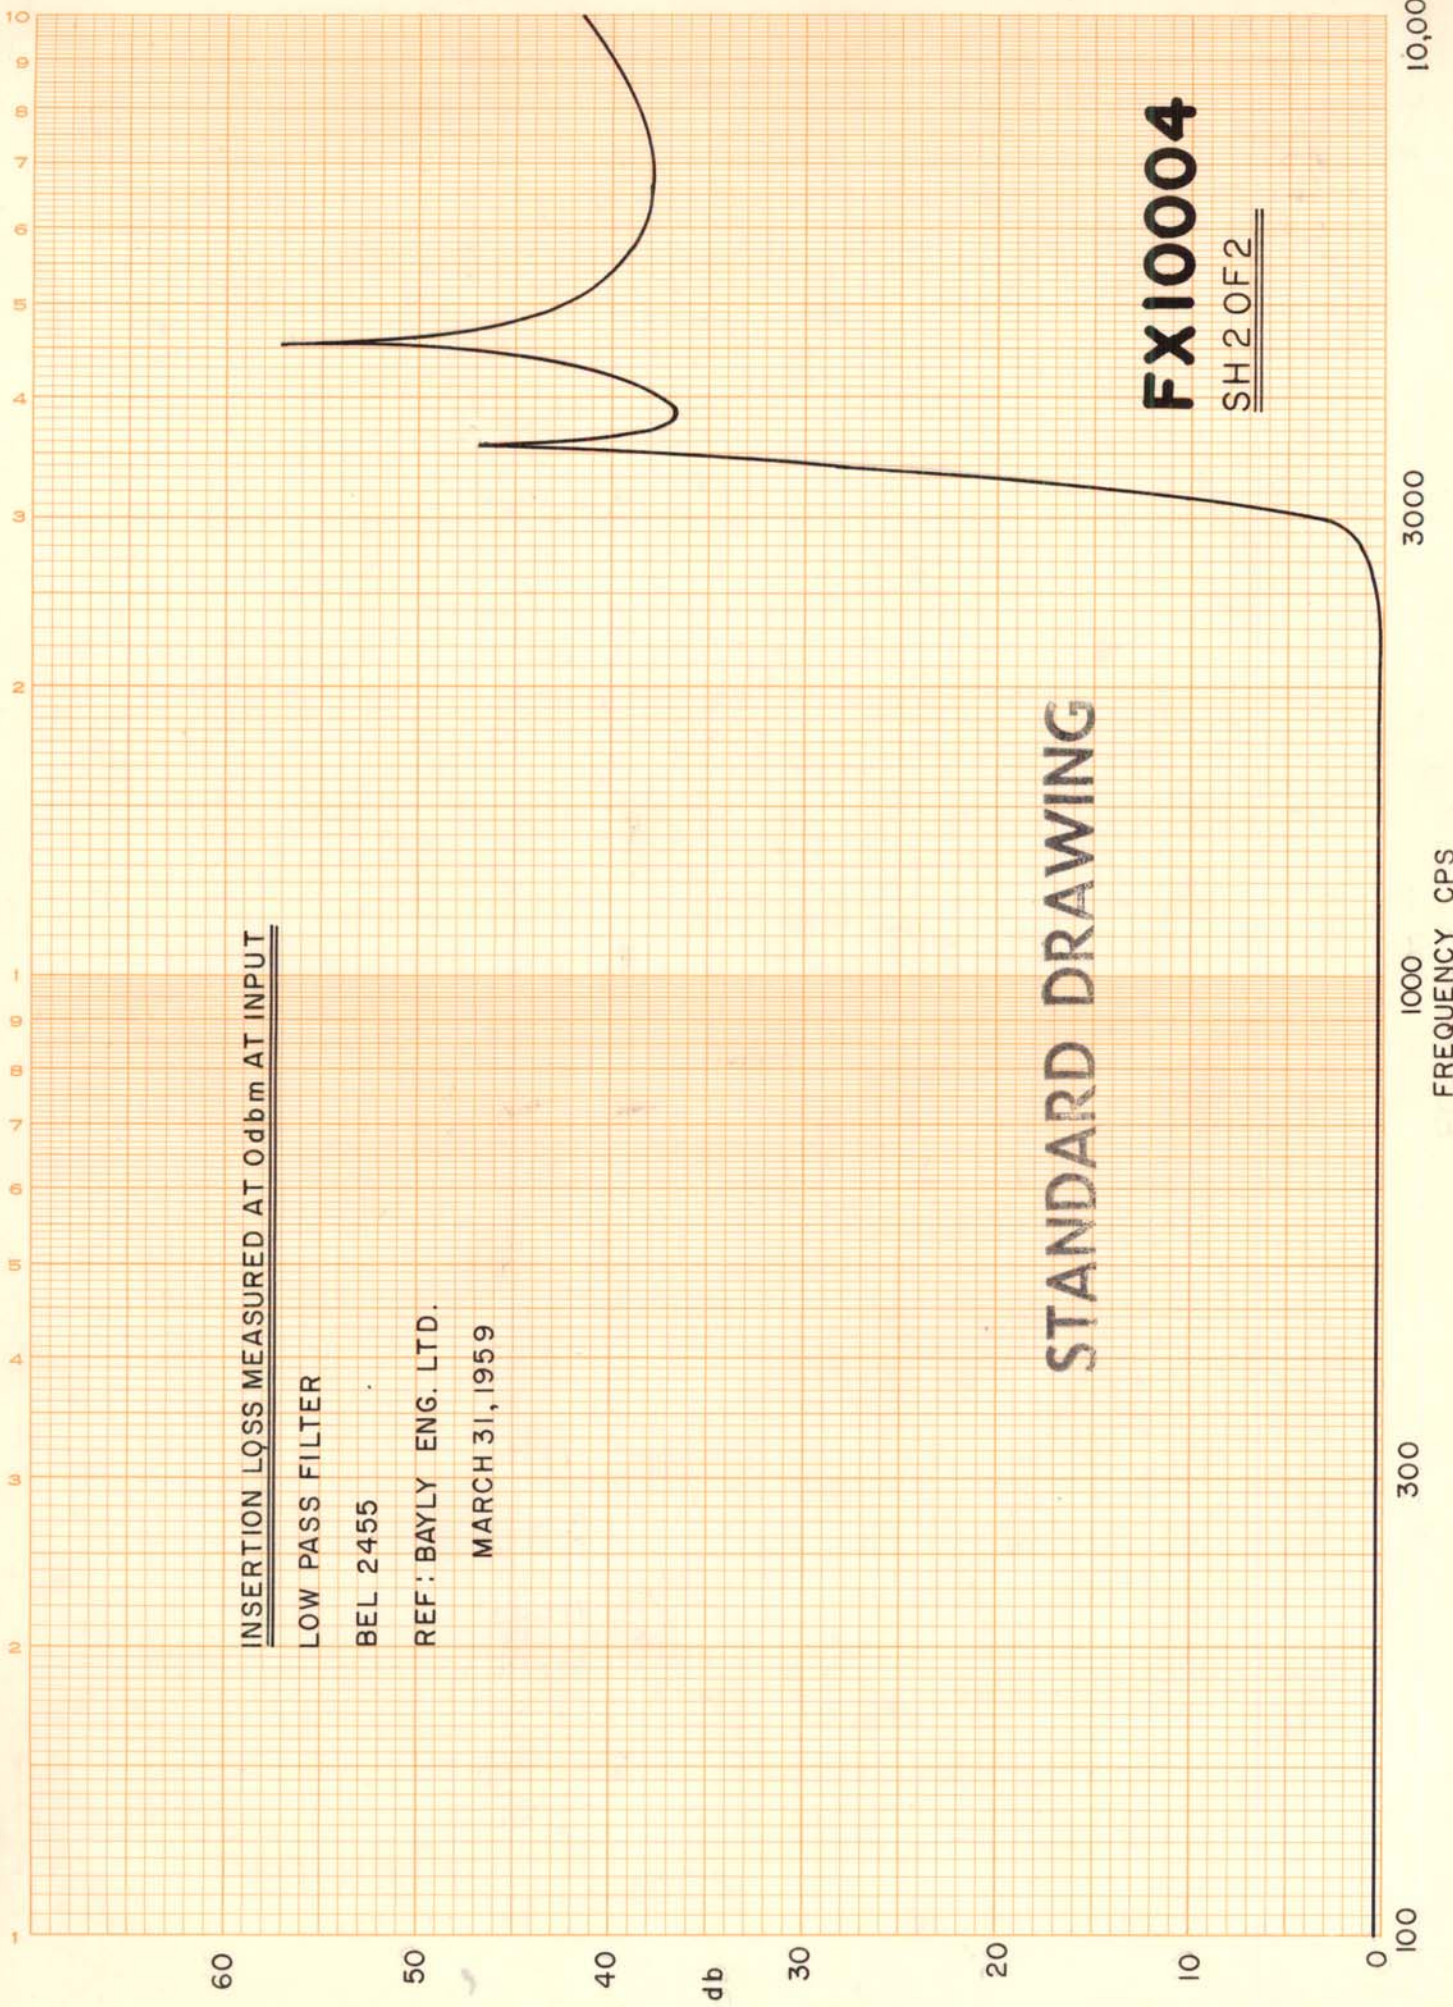

INSERTION LOSS MEASURED AT 0dbm AT INPUT

LOW PASS FILTER

BEL 2455

REF: BAYLY ENG. LTD.

MARCH 31, 1959

STANDARD DRAWING

FX10004

SH 2 OF 2