STANDARD DRAWING

WIDTH CHART	
WIDTH CODE	A [WIDTH OF RUBBER]
38	.380

REQ. PER UNIT	USED ON MODEL	ASS'Y. NO.	DATE	GA161	Ø

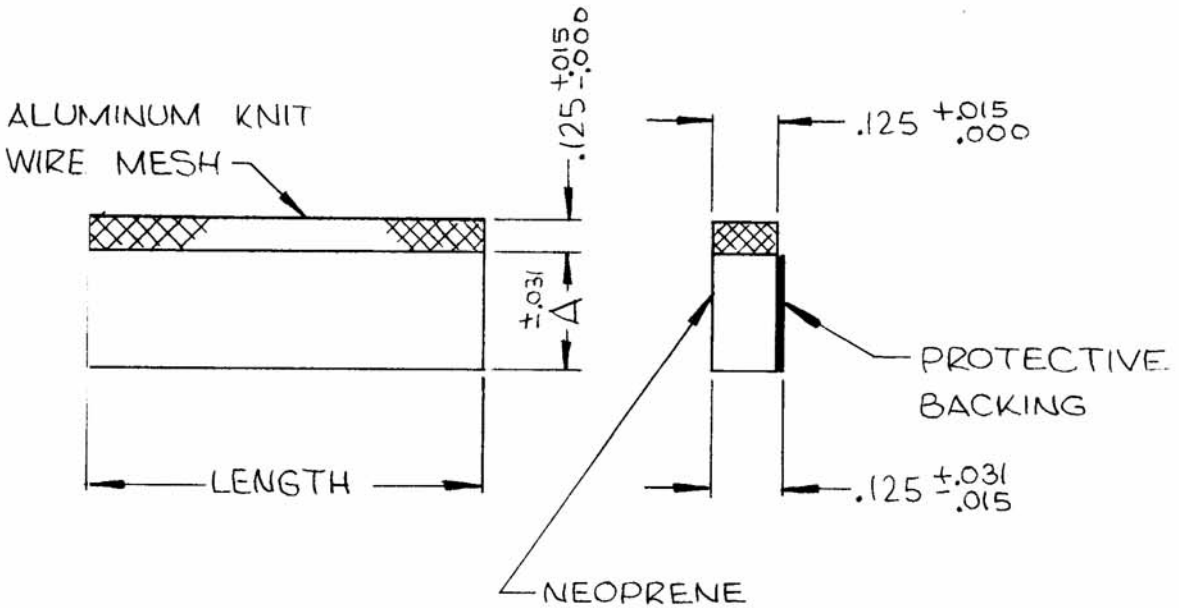

SPECIFICATIONS

RFI CONTROL RATING
SHIELDING EFFECTIVENESS: 80-110 db
INSERTION LOSS: 40-60 db
NEOPRENE: MIL-R-6130, TYPE II, GRADE A, CONDITION MEDIUM
ALUMINUM MESH: AMS-4182 ALLOY 5056
BACKING: PRESSURE-SENSITIVE ADHESIVE ON NEOPRENE

~NOTE~
TO BE PURCHASED IN STANDARD TWELVE (12) FOOT LENGTHS

TMC PART No. TO BE IN THE FOLLOWING FORM

GA161-38-5.25

- GA161 — BASIC DWG NO
- 38 — WIDTH CODE (SEE CHART)
- 5.25 — LENGTH IN INCHES (2 DECIMAL PLACES)

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
Ø	ORIGINAL RELEASE	9/26/69		CW		

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

TOLERANCES: DECIMALS .X ±.05, .XX ±.01, .XXX ±.005; FRACTIONS ± 1/64; ANGLES ± 0° 30'

SCALE: 5401-434 (26106)

CODE:

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
			BUDETTI	

STOCK SIZE:

MATERIAL:

TYPE & TEMPER | HEAT TREAT. SPEC.:

FINISH & SPEC. NO.:

THE TECHNICAL MATERIEL CORP.
MAMARONECK, NEW YORK

GASKET, SHIELDING, RFI

DRAWN	CHECKED	FINAL APPROVAL
LHW	CB	9/26/69

ELEC. DES. APP.	MECH. DES. APP.	
	10/7/66	GA161 Ø

TMC FORM 108-A

REPROVEL NO. 440H 23845