


RE PER UNIT	USED ON	DATE	GR-128	A
1	M DEL	ASSY. N.		
	RTF	A-1569	4/29/56	
	RTF-2	P/A	11/10/58	

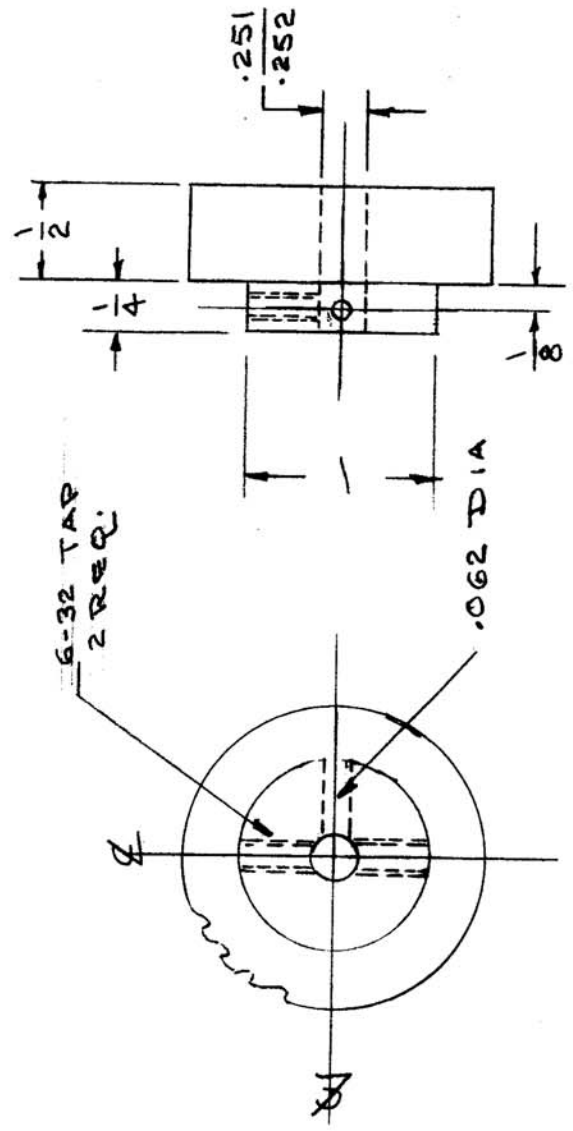

TEETH 24  
 PITCH DIA 1.500  
 DIAMETRAL PITCH 16  
 NORMAL PITCH 22.63  
 NORMAL PA 14 1/2  
 FACE 1"  
 LEFT HAND GEAR  
 HELIX ANGLE 45°  
 COMMERCIAL TOL. CLASS 3

SUPPLIED BY MFR.  
 G-32 X 3/8 LONG, HEX SOCKET SET SCREWS  
 2 REQ.

MESHES WITH GR-124  
 OR  
 GR-138

REF: NEW JERSEY GEAR WORKS

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
		THE TECHNICAL MATERIEL CORP. MAMARONECK. NEW YORK	
		GEAR, HELICAL	
		P/A	GRT-750
		NYLON	
		MATERIAL	
		FM-10001	
		TYPE & TEMPER	
		HEAT TREAT. SPEC.	
		DRAWN	
		CHECKED	
		ELEC. DES. APP.	
		MECH. DES. APP.	
		FINISH & SPEC. NO.	
			GR-128
			A

SCALE:  
 MAXIMUM ALLOWABLE TOLERANCES HAVE  
 BEEN DETERMINED AND ANY DEVIATIONS  
 WILL BE CAUSE FOR REJECTION.  
 REMOVE ALL BURRS AND SHARP EDGES