| REQ. PER UNIT | USED ON MODEL | ASS'Y. NO. | DATE | HB-114 |
|---|---|---|---|---|
| 2 | CON | | 12-10-59 | |

SPECIFICATIONS ~

660 WATTS

250 VOLTS AC

COLOR ~ BLACK

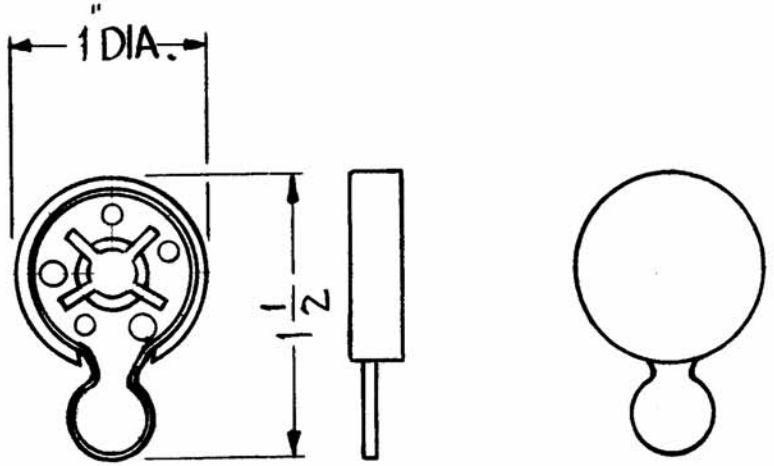


(INSIDE VIEW)

NOTE FOR USE WITH:
TMC PT. NOs BI-108 & TS-145

| ISSUE | ITEM | CHANGED FROM | DATE | CH. NO. | DRAFTS | CHECKER | ENG. APP. |
|---|---|---|---|---|---|---|---|
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |

TOLERANCES

DEC. DIM. ±
FRAC. DIM. ±
ANGULAR DIM. ±

SCALE: S401-83 (3890)

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES

| REQ. | ITEM | PART NO. | DESCRIPTION | SYMBOL |
|---|---|---|---|---|
| | | | | |

STOCK SIZE

MATERIAL

TYPE & TEMPER | HEAT TREAT. SPEC.

FINISH & SPEC. NO.

THE TECHNICAL MATERIEL CORP.
MAMARONECK, NEW YORK

CAP, CONNECTOR
(SHALLOW COLLAR)

| DRAWN | CHECKED | FINAL APPROVAL |
|---|---|---|
| J.C. Biele | | |
| ELEC. DES. APP | MECH. DES. APP | HB-114 |

FORM 108-A