IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES

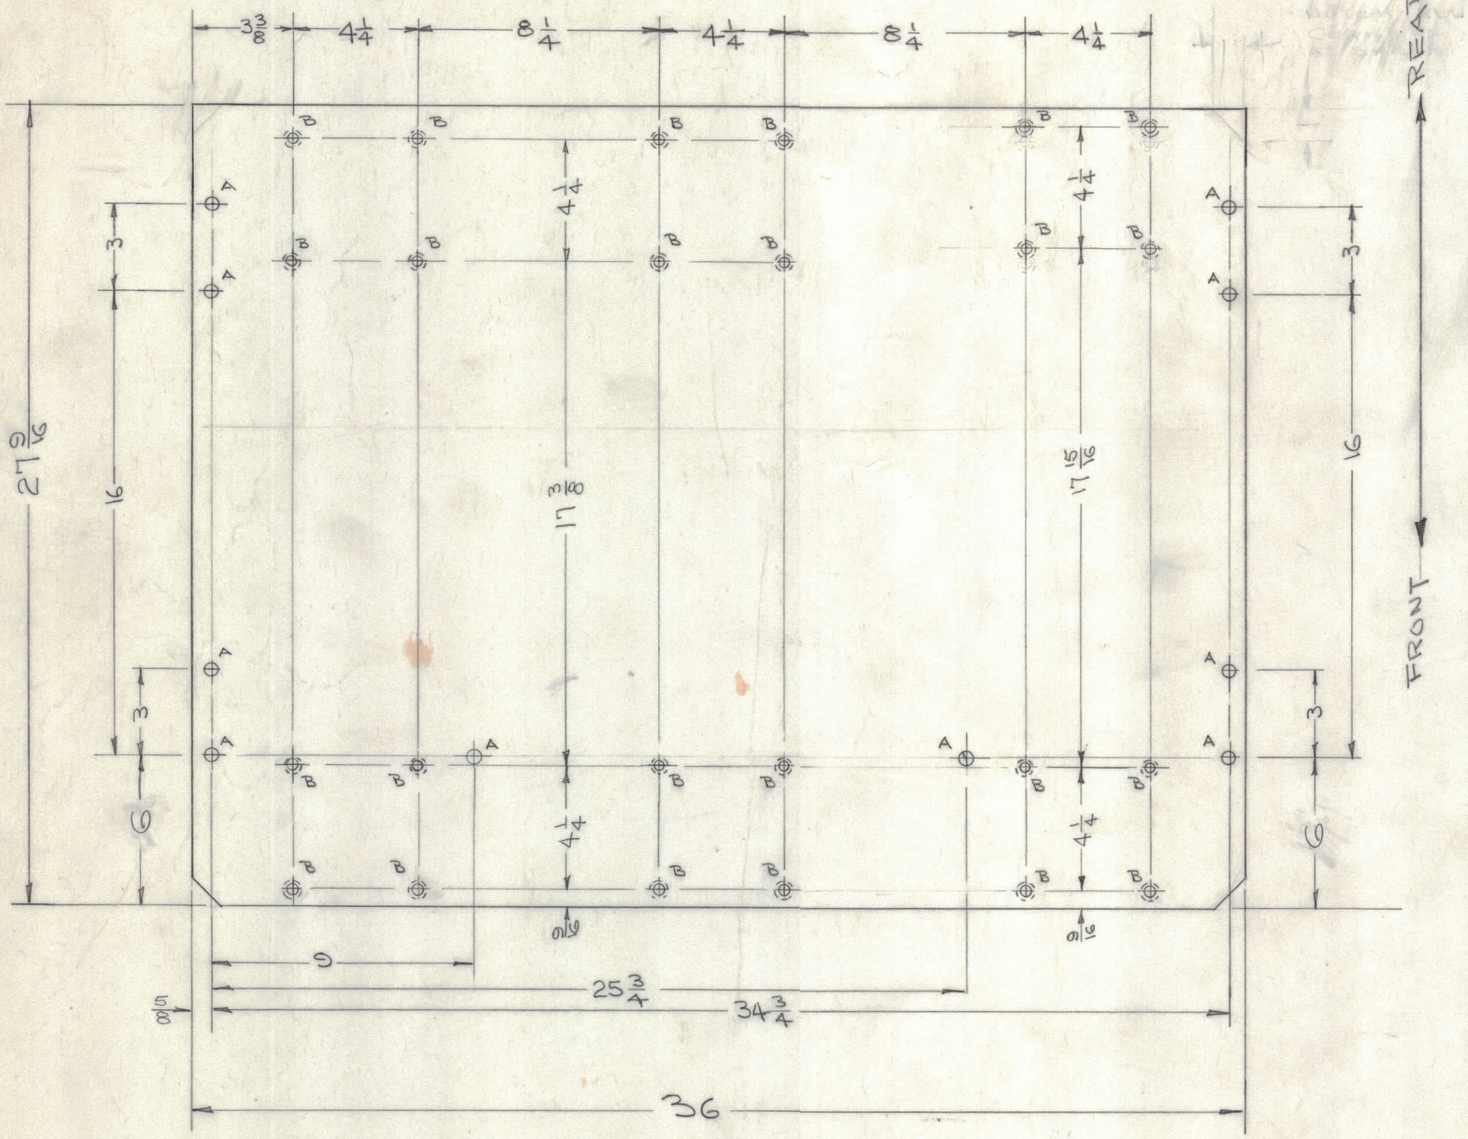


LEGEND:
A = 1/2 (.500) D - 10 HOLES REQ.
B = DRILL & TAP 7/16-20 - 24 HOLES REQ.

GPT-750 MOUNTING PLATE
MATERIAL : 3/8 THICK STEEL PLATE
FINISH : CADMIUM PLATE
SCALE : 1/4" = 1"

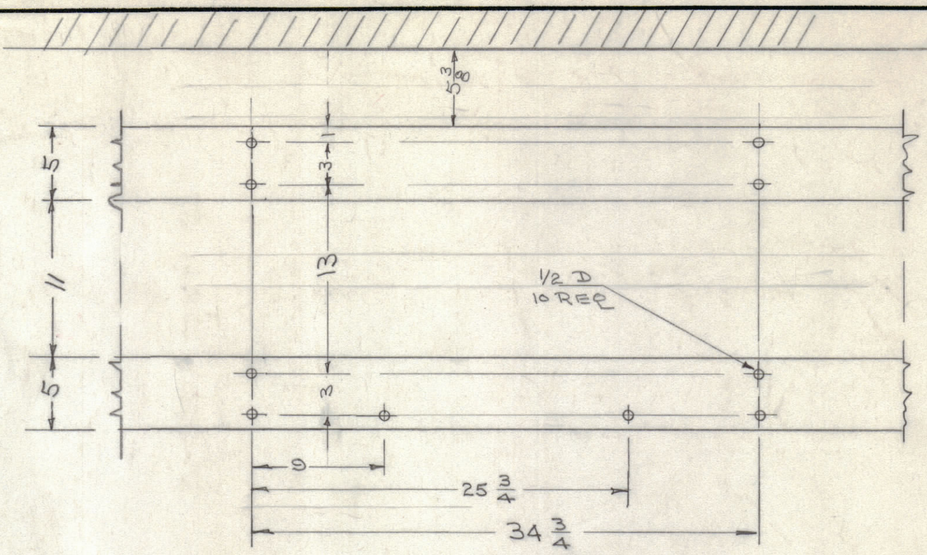


DRILLING PLAN FOR "I" BEAMS FOR CRAIG HELICOPHUT

ID-183

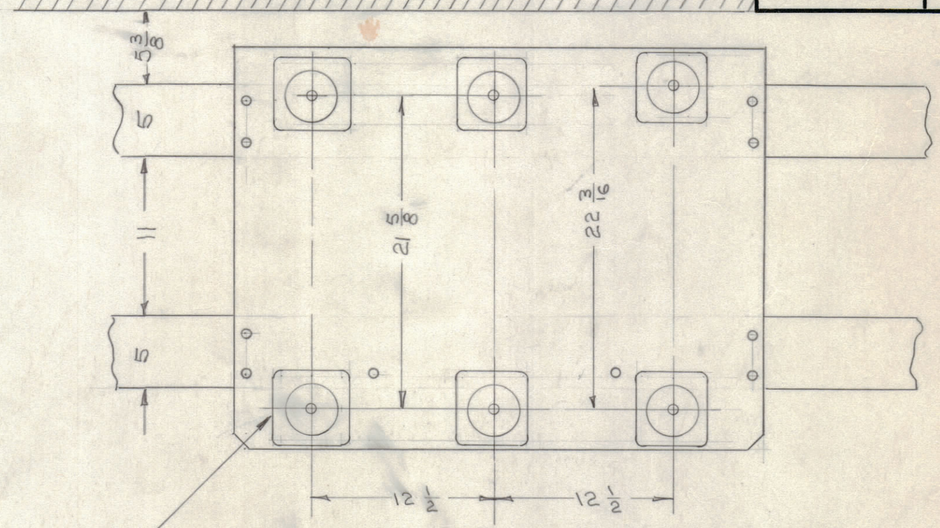


SHOCK ISOLATOR
MAX. LOAD RATING : 900 lbs.
TYPE : C4300
BARRY CONTROLS INC.

MOUNTING DIMENSIONS FOR GPT-750

NOTICE TO PERSONS RECEIVING THIS DRAWING

THE TECHNICAL MATERIEL CORPORATION claims proprietary right in the material disclosed hereon. This drawing is issued in confidence for engineering information only and may not be reproduced or used to manufacture anything shown hereon without permission from THE TECHNICAL MATERIEL CORPORATION to the user. This drawing is loaned for mutual assistance and is subject to recall at any time.

Property of:
THE TECHNICAL MATERIEL CORPORATION
MAMARONECK, NEW YORK

| ISSUE | ITEM | CHANGED FROM | DATE | CN. NO. | DRAFTS | CHECKER | ENG. APP. |
|---|---|---|---|---|---|---|---|

| TOLERANCES | | SCALE: |
|---|---|---|
| ALL OTHERS | DEC. DIM. ±<br>FRAC. DIM. ±<br>ANGULAR DIM. ± | DRILL, PUNCH, COMMERCIAL STOCK SIZES AND MANUFACTURERS TOLERANCES ARE NOT INCLUDED. |

| REQ. PER UNIT | GPT-750 | E-650-P | | 12-12-56 |
|---|---|---|---|---|
| | MODEL | PROJECT NO. | ASS'Y. NO. | DATE |
| USED ON | | | | |

| REQ. | ITEM | PART NO. | DESCRIPTION | SYMBOL |
|---|---|---|---|---|
| STOCK SIZE | | | THE TECHNICAL MATERIEL CORP. MAMARONECK. NEW YORK | |
| MATERIAL | WEIGHT PER PC. | | RECOMMENDED SHOCK ISOLATION FOR GPT-750 | |
| TYPE & TEMPER | | | | |
| HEAT TREAT. SPEC. | | | DRAWN / ELEC. DES. APP. / MECH. DES. APP. | wx |
| FINISH & SPEC. NO. | | | CHECKED / FINAL APPROVAL | A.J.J |
| | | | | ID-183 |

FORM — 110