


IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES.

ISSUE ITEM CHANGED FROM DATE CN. NO. DRAFTS CHECKER ENG. APP.

DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED


REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
------	------	----------	-------------	--------

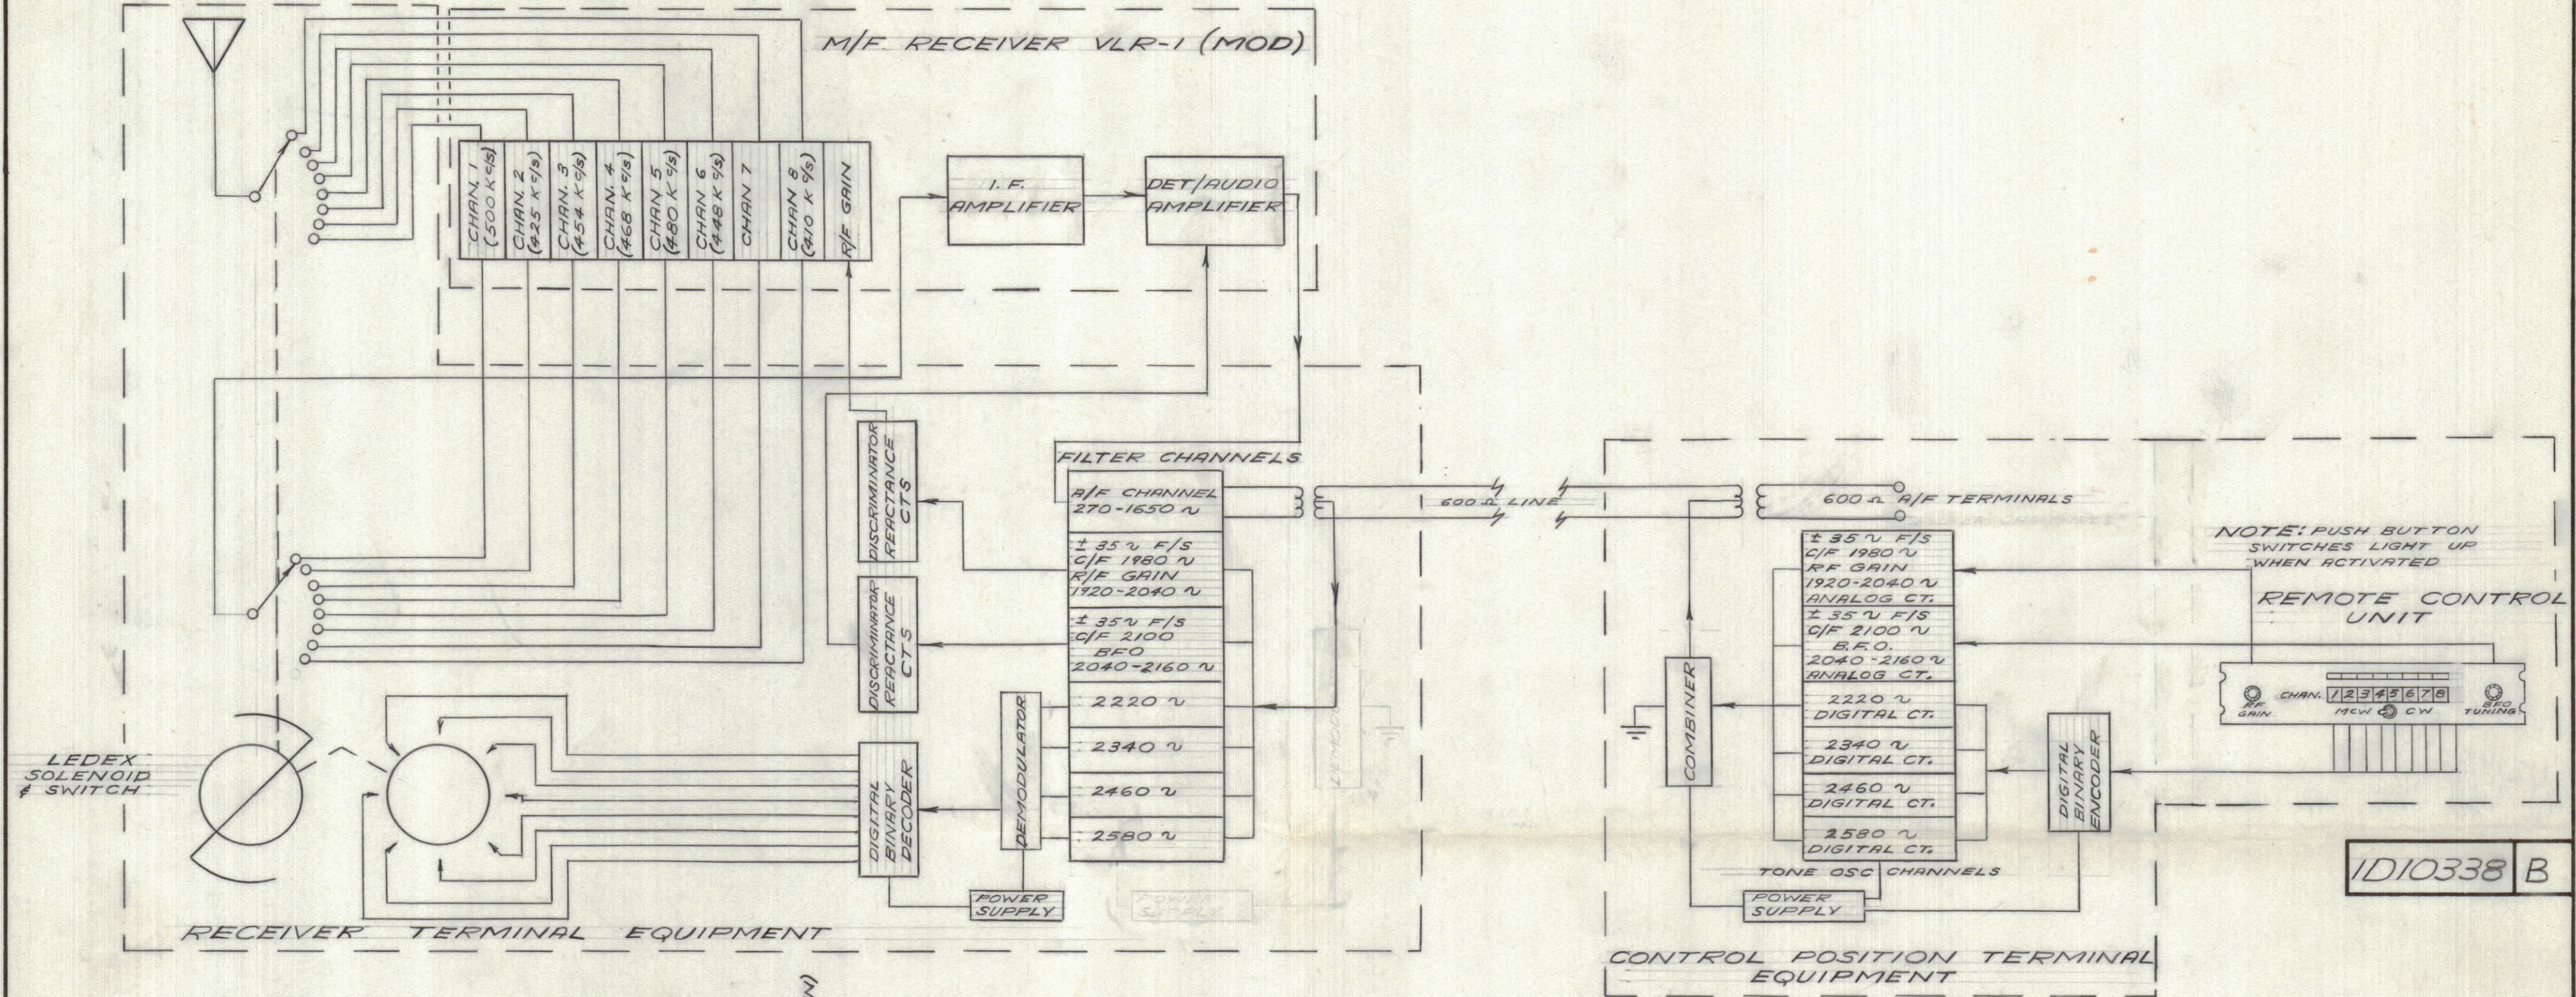

NOTE: PUSH BUTTON SWITCHES LIGHT UP WHEN ACTIVATED

REMOTE CONTROL UNIT

1D10338 B

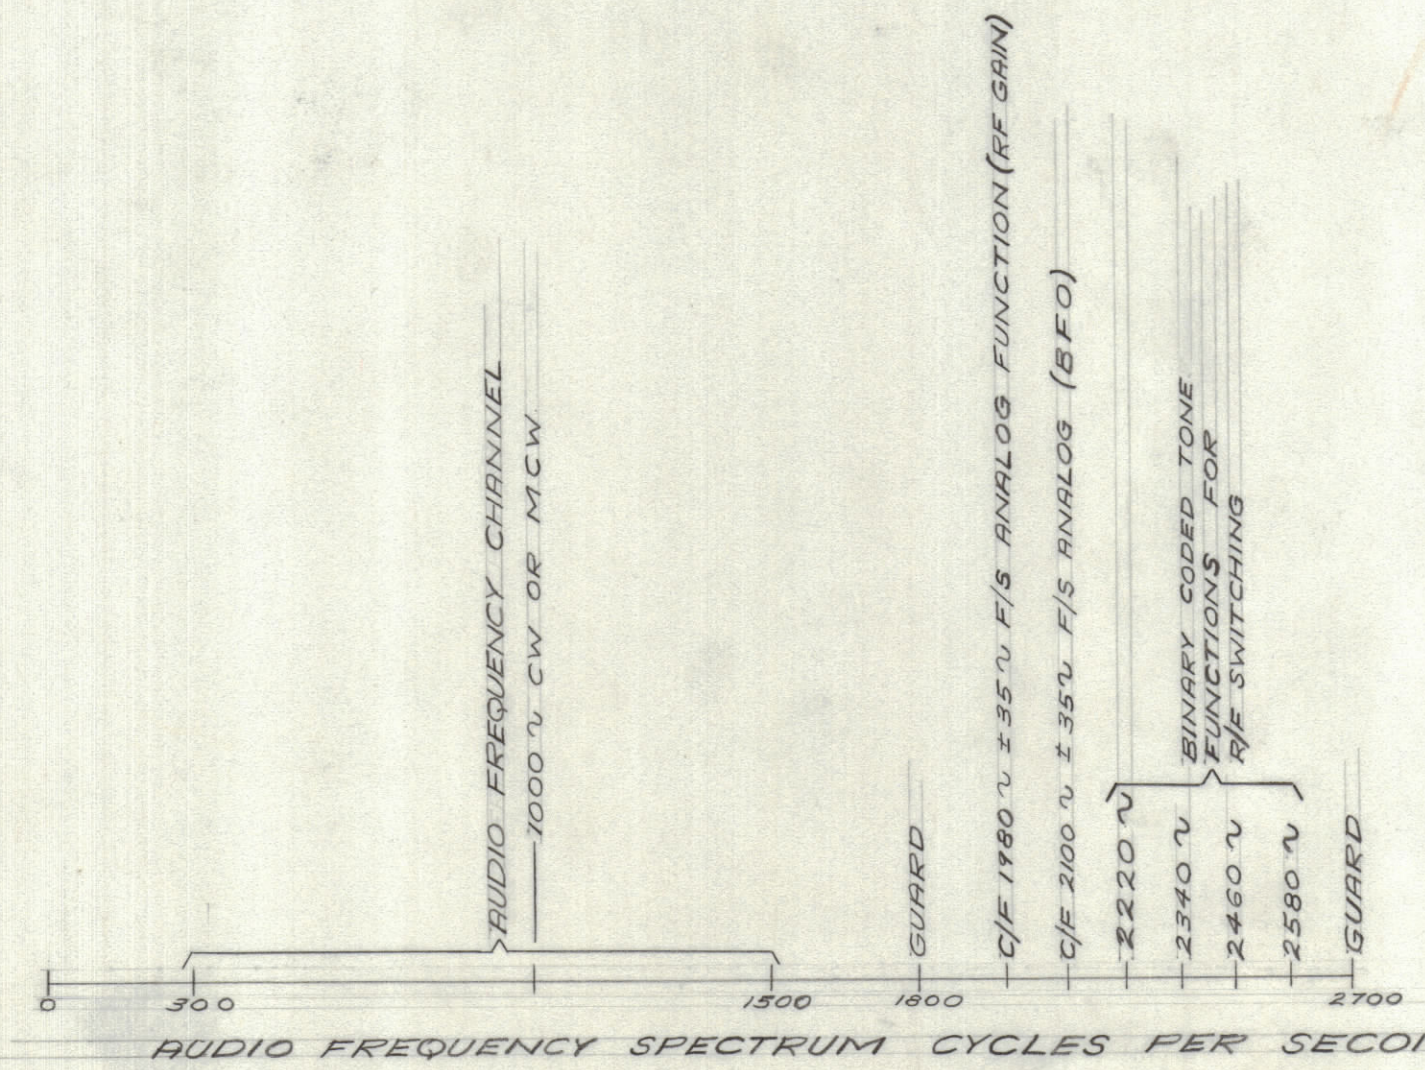

NOTE: CONTROL FREQUENCIES - 120 Hz SPACING ± 35 F/S ANALOG FUNCTION

BFO & LEDEX CONTROL POSITIONS	TONES			
	2220	2340	2460	2580
BFO ON-OFF				●
CHANNEL 1			●	
CHANNEL 2				●
CHANNEL 3		●		
CHANNEL 4		●	●	
CHANNEL 5		●	●	●
CHANNEL 6		●	●	●
CHANNEL 7	●			
CHANNEL 8	●			●

TOLERANCES		SCALE:
ALL OTHERS	DEC. DIM. ± FRAC. DIM. ± ANGULAR DIM. ±	DRILL, PUNCH, COMMERCIAL STOCK SIZES AND MANUFACTURERS TOLERANCES ARE NOT INCLUDED.

MODEL	PROJECT NO.	ASS'Y. NO.	DATE
			2-10-64

STOCK SIZE		TMC (Canada) LIMITED OTTAWA ONTARIO	
MATERIAL		BLOCK DIAGRAM PROPOSED	
WEIGHT PER PC.		R/C SYSTEM FOR VLR-1 RECEIVER (MODIFIED)	
TYPE & TEMPER		RD	
DRAWN		ELEC. DES. APP. MECH. DES. APP.	
HEAT TREAT. SPEC.		CHECKED	
FINISH & SPEC. NO.		FINAL APPROVAL	
		1D10338 B	