
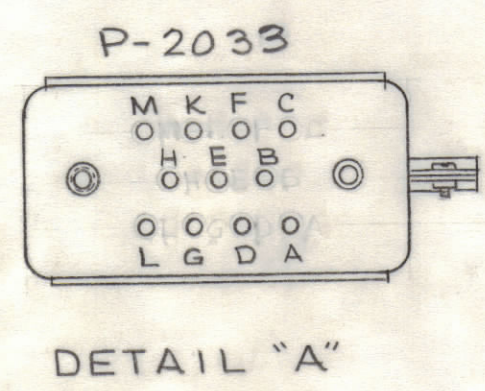


REVISIONS						
SYM	ZONE	DESCRIPTION	DATE	E.M.N. NO.	DRAFT	CHKD APPD
A		REVISED	9/27/65		MJT	
B		SEE SHEETS 1, 4 & 5.	6/1/66	16315	C.H.	<i>[Signature]</i>

TECHNICAL DATA

POWER INPUT: 100 WATTS
 VOLTAGE: 115/230 VAC
 PHASE: 1 ϕ
 FREQUENCY: 50/60 CPS
 HEAT DISSIPATION: 100 WATTS 340 BTU'S /HR
 AMBIENT TEMP. RANGE: 0 TO 50°C
 RELATIVE HUMIDITY: 0 TO 90%
 WEIGHT: 75 lbs.

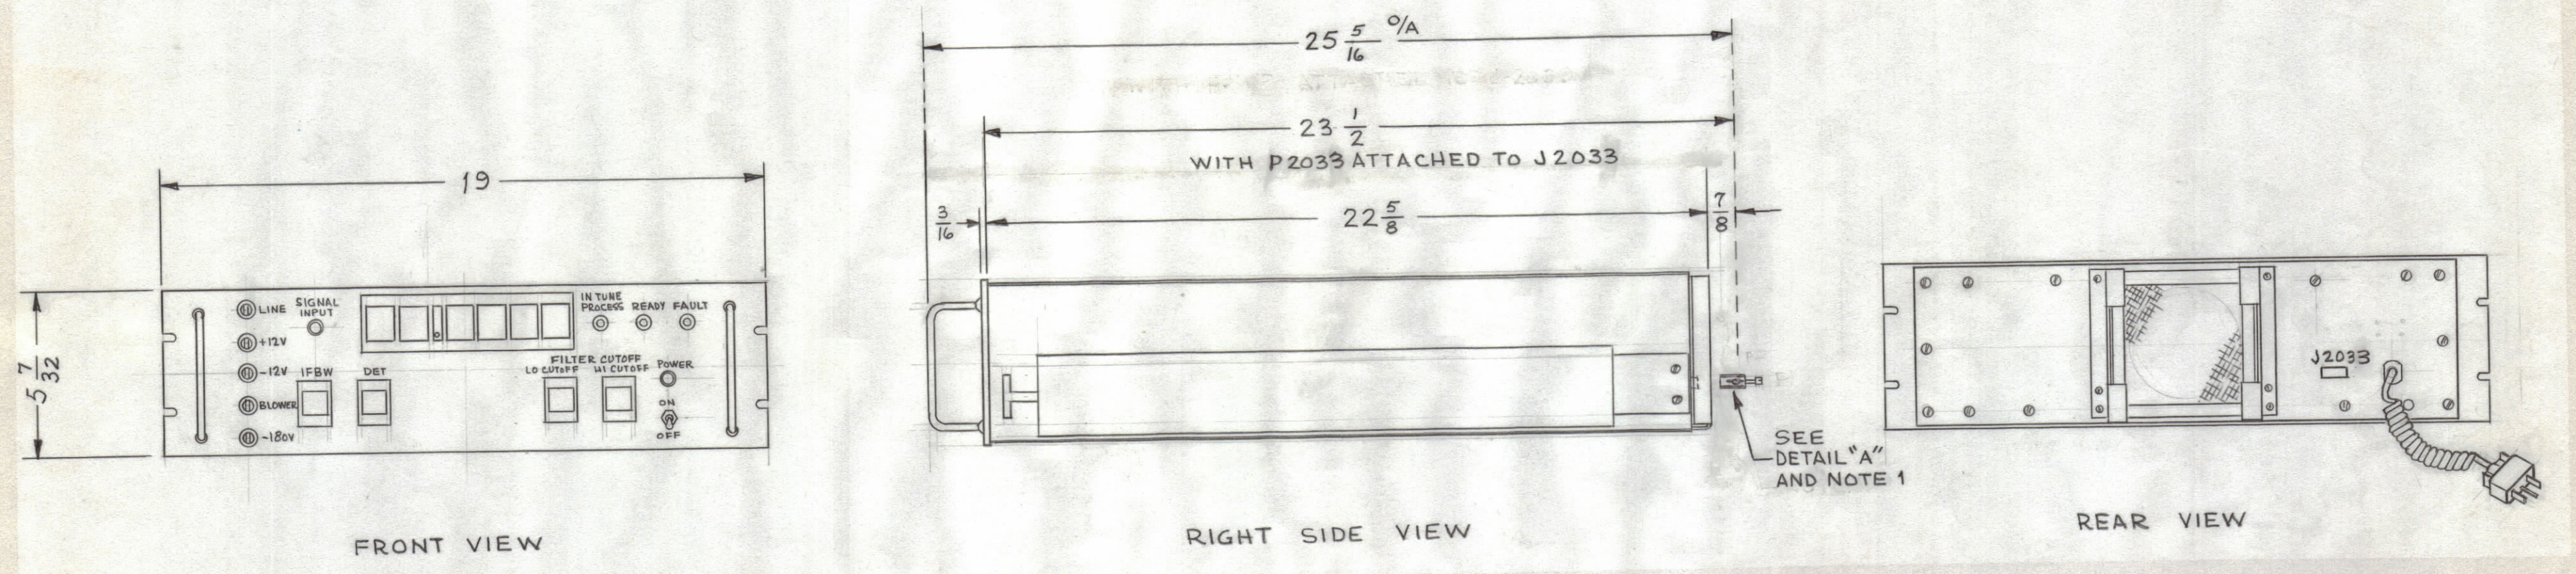

NOTE:

- SIGNAL REQUIREMENTS 12 VDC POSITIVE GROUND.
- SEE SHEET 6 FOR INSTALLATION MATERIAL LIST

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION.

QTY REQ	ITEM	PART NO.	DESCRIPTION	SYMBOL
BILL OF MATERIAL				
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON FRACTIONS DECIMALS ANGLES ±1/64 ±.005 ±1/2°			THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
MATERIAL		CONTROL MONITOR GROUP, MODEL RCWB-1 INDICATOR, FREQUENCY, MODEL RTID-1		
FINISH		INDICATOR, FREQUENCY ID		
APPROVED FOR BUSHIPS		CODE	SIZE	DWG. NO.
CONTRACT NO.		82679	C	ID-325
N600(63133-11-126)63002		SCALE NONE		ISSUE B
				SHEET 3 OF 6