TMC NO.	"A"	"B"	USED ON	REQ. PER UNIT
IM-172-1	4 3/8	5 3/8	TER-5000 600	4
IM-172-2	4 3/8	5 3/16	TER-5000-70	4

REQ. PER UNIT	USED ON MODEL	ASS'Y. NO.	DATE
4	TER-5000		5-28-58

IM-172 B

DIELECTRIC STRENGTH- 2" ELECTRODES- 650 Volts Per Mil

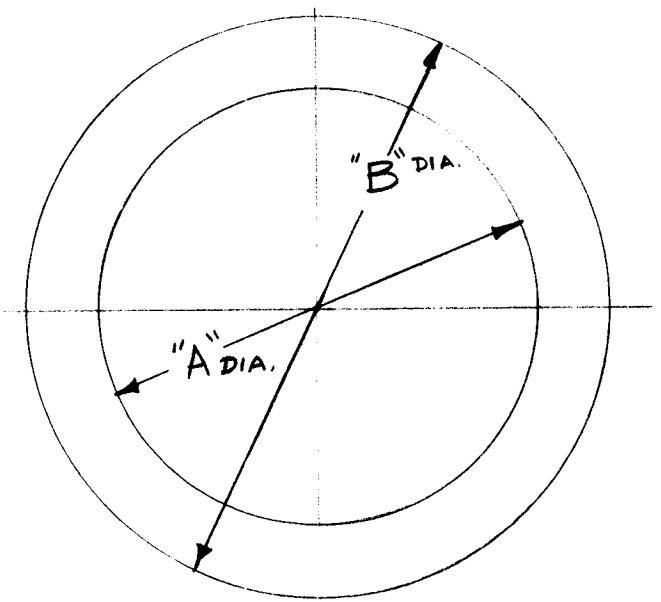

Ref- ARVEY CORP.

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
B	1	Material was Asbestos, Mylar, Asbestos, Laminated .019 thk.	7 29 60	2 6 3 6	Cy	JCB	[signature]
A	1	IM-172-2 Added For TER-5000-70	2/1/59	732	LG	[signature]	E.G. [signature]

TOLERANCES

DEC. DIM. ±
FRAC. DIM. ±
ANGULAR DIM. ±

SCALE:

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION.
REMOVE ALL BURRS AND SHARP EDGES

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
		.020 ThK.	THE TECHNICAL MATERIEL CORP. MAMARONECK. NEW YORK	
		STOCK SIZE	INSULATION, RESISTOR (TER-5000)	
		ASBESTOS		
		MATERIAL		

TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL
		5-22-57	[signature]	[signature]
FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.	IM-172 B

FORM - 108 - A