IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES.

NOTICE TO PERSONS RECEIVING THIS DRAWING

THE TECHNICAL MATERIEL CORPORATION claims proprietary right in the material disclosed hereon. This drawing is issued in confidence for engineering information only and may not be reproduced or used to manufacture anything shown hereon without permission from THE TECHNICAL MATERIEL CORPORATION to the user. This drawing is loaned for mutual assistance and is subject to recall at any time.

Property of:

THE TECHNICAL MATERIEL CORPORATION
MAMARONECK, NEW YORK

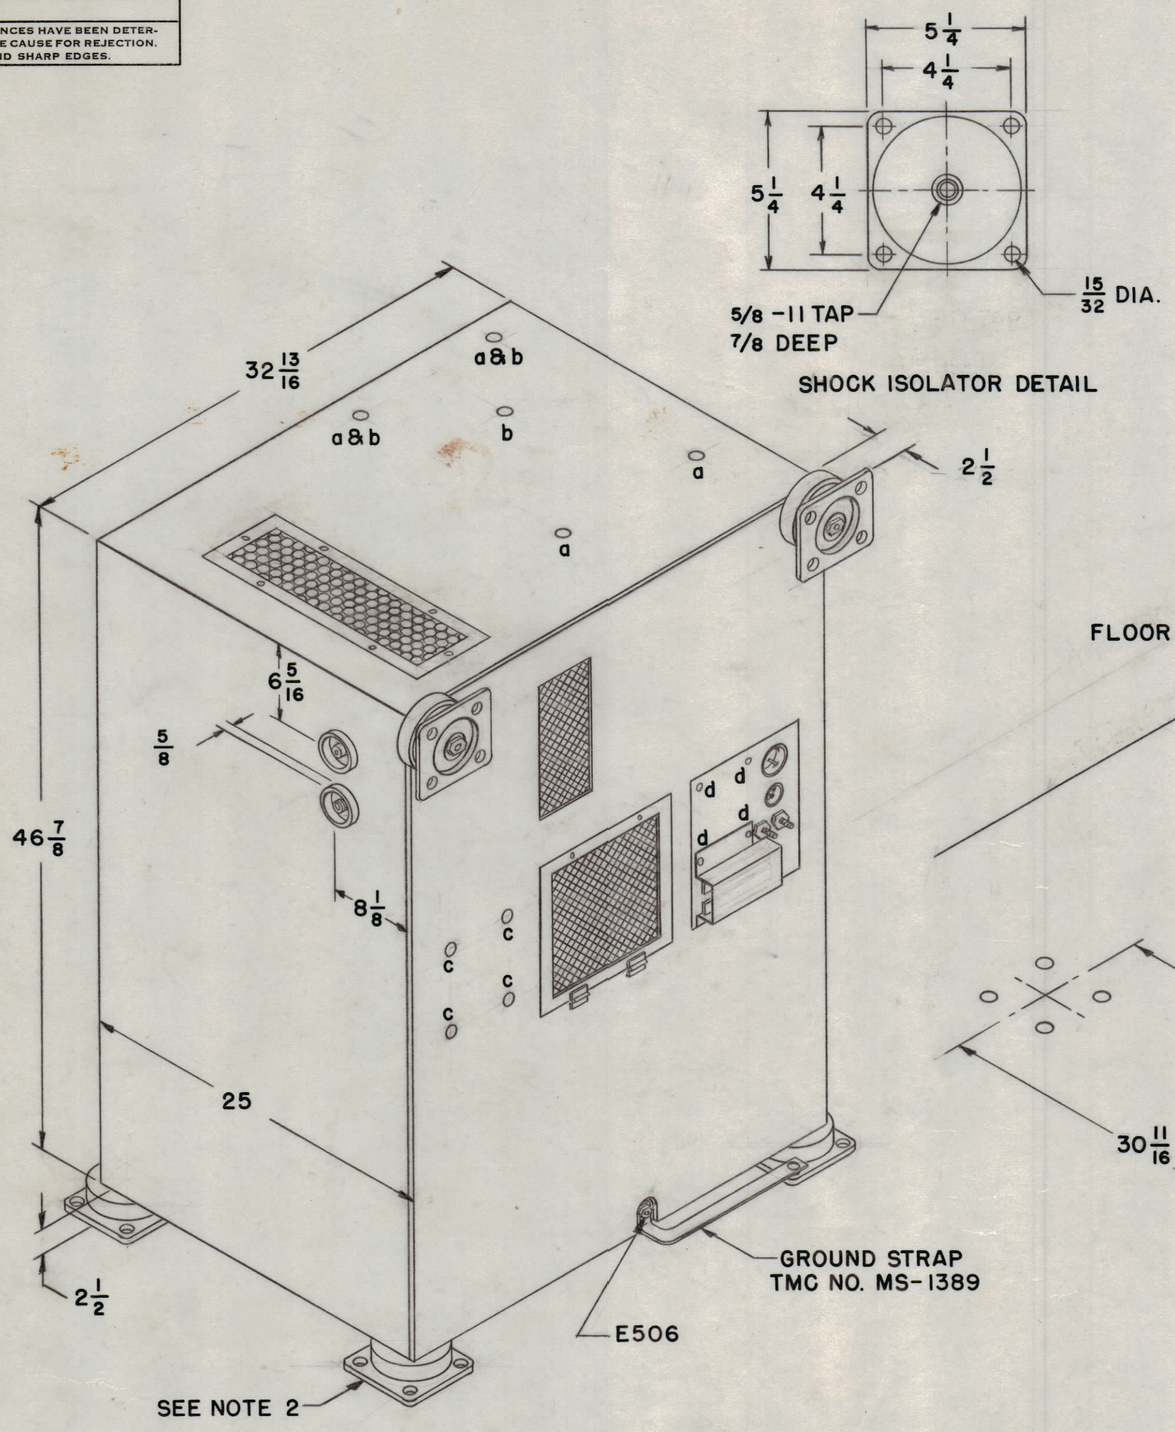

SHOCK ISOLATOR DETAIL

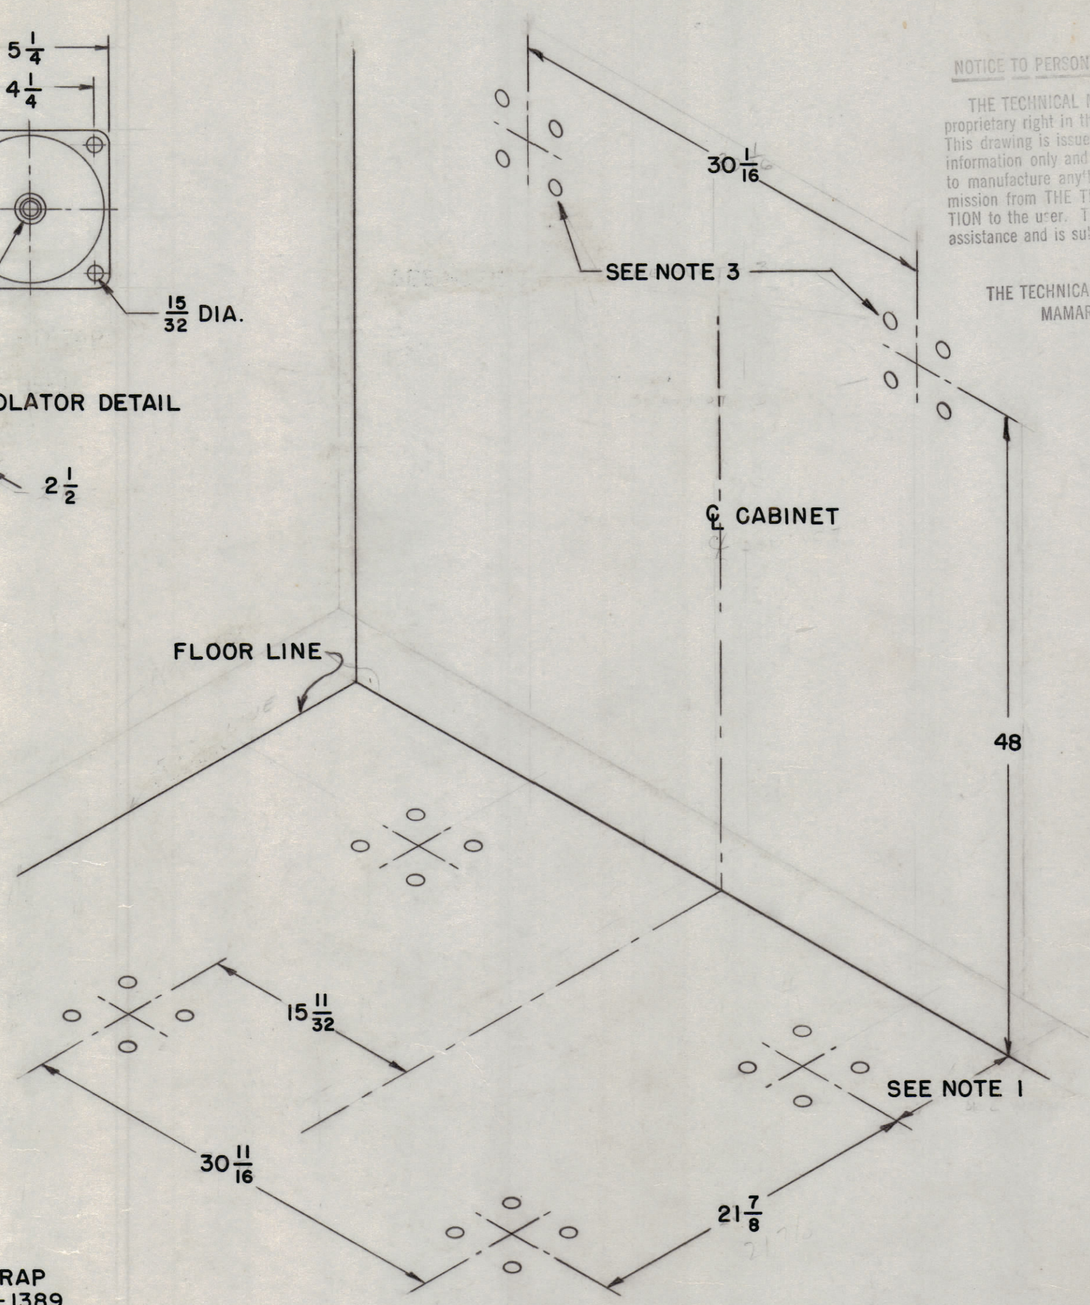

ACCESSORY MOUNTING HOLES

a – MODEL TAC
b – MODEL ATS-MC
c – MODEL ATS-CU
d – MODEL TRL

NOTE:

1. SUGGESTED DISTANCE FROM WALL FOR VENTING PURPOSES AND ACCESS TO FILTER DOOR APPROX. 12 INCHES.
2. 6 SHOCK ISOLATORS REQUIRED. TMC NO. SH-100
3. IF ONLY 4 BOTTOM SHOCK ISOLATORS ARE USED DISREGARD TOP HOLES.

IN-1088

IN-1088 | Ø

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
	Ø	ORIG REL FOR PROD	4/10/69	~	GE		

TOLERANCES

ALL OTHERS: DEC. DIM. ±; FRAC. DIM. ±; ANGULAR DIM. ±

SCALE: 4

DRILL, PUNCH, COMMERCIAL STOCK SIZES AND MANUFACTURERS TOLERANCES ARE NOT INCLUDED.

REQ. PER UNIT	MODEL	PROJECT NO.	ASSY. NO.	DATE
USED ON				

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
			THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
STOCK SIZE			SHOCK MOUNTING DIMENSIONS FOR GPT-750( )-2	
MATERIAL		WEIGHT PER PC.		
TYPE & TEMPER			MJT. 1·26·59 DRAWN	ELEC. DES. APP. / MECH. DES. APP.
HEAT TREAT. SPEC.			1/26/59 CHECKED	SFM 4/11/69 FINAL APPROVAL
FINISH & SPEC. NO.				IN-1088 Ø

FORM-110

To 39970 Fig G-3-2 Reduce to fit

TRIANGLE LITHOPRINT CO., INC. 23287