


NOTE TO PERSONS RECEIVING THIS DRAWING
 THE TECHNICAL MATERIEL CORPORATION claims
 proprietary right in the material disclosed herein.
 This drawing is issued in confidence for engineering
 information only and may not be reproduced or used
 to manufacture anything shown hereon without per-
 mission from THE TECHNICAL MATERIEL CORPORA-
 TION to the user. This drawing is loaned for mutual
 assistance and is subject to recall at any time.
 Properly of:
 THE TECHNICAL MATERIEL CORPORATION
 MAMARONECK, NEW YORK

FRONT OF UNIT

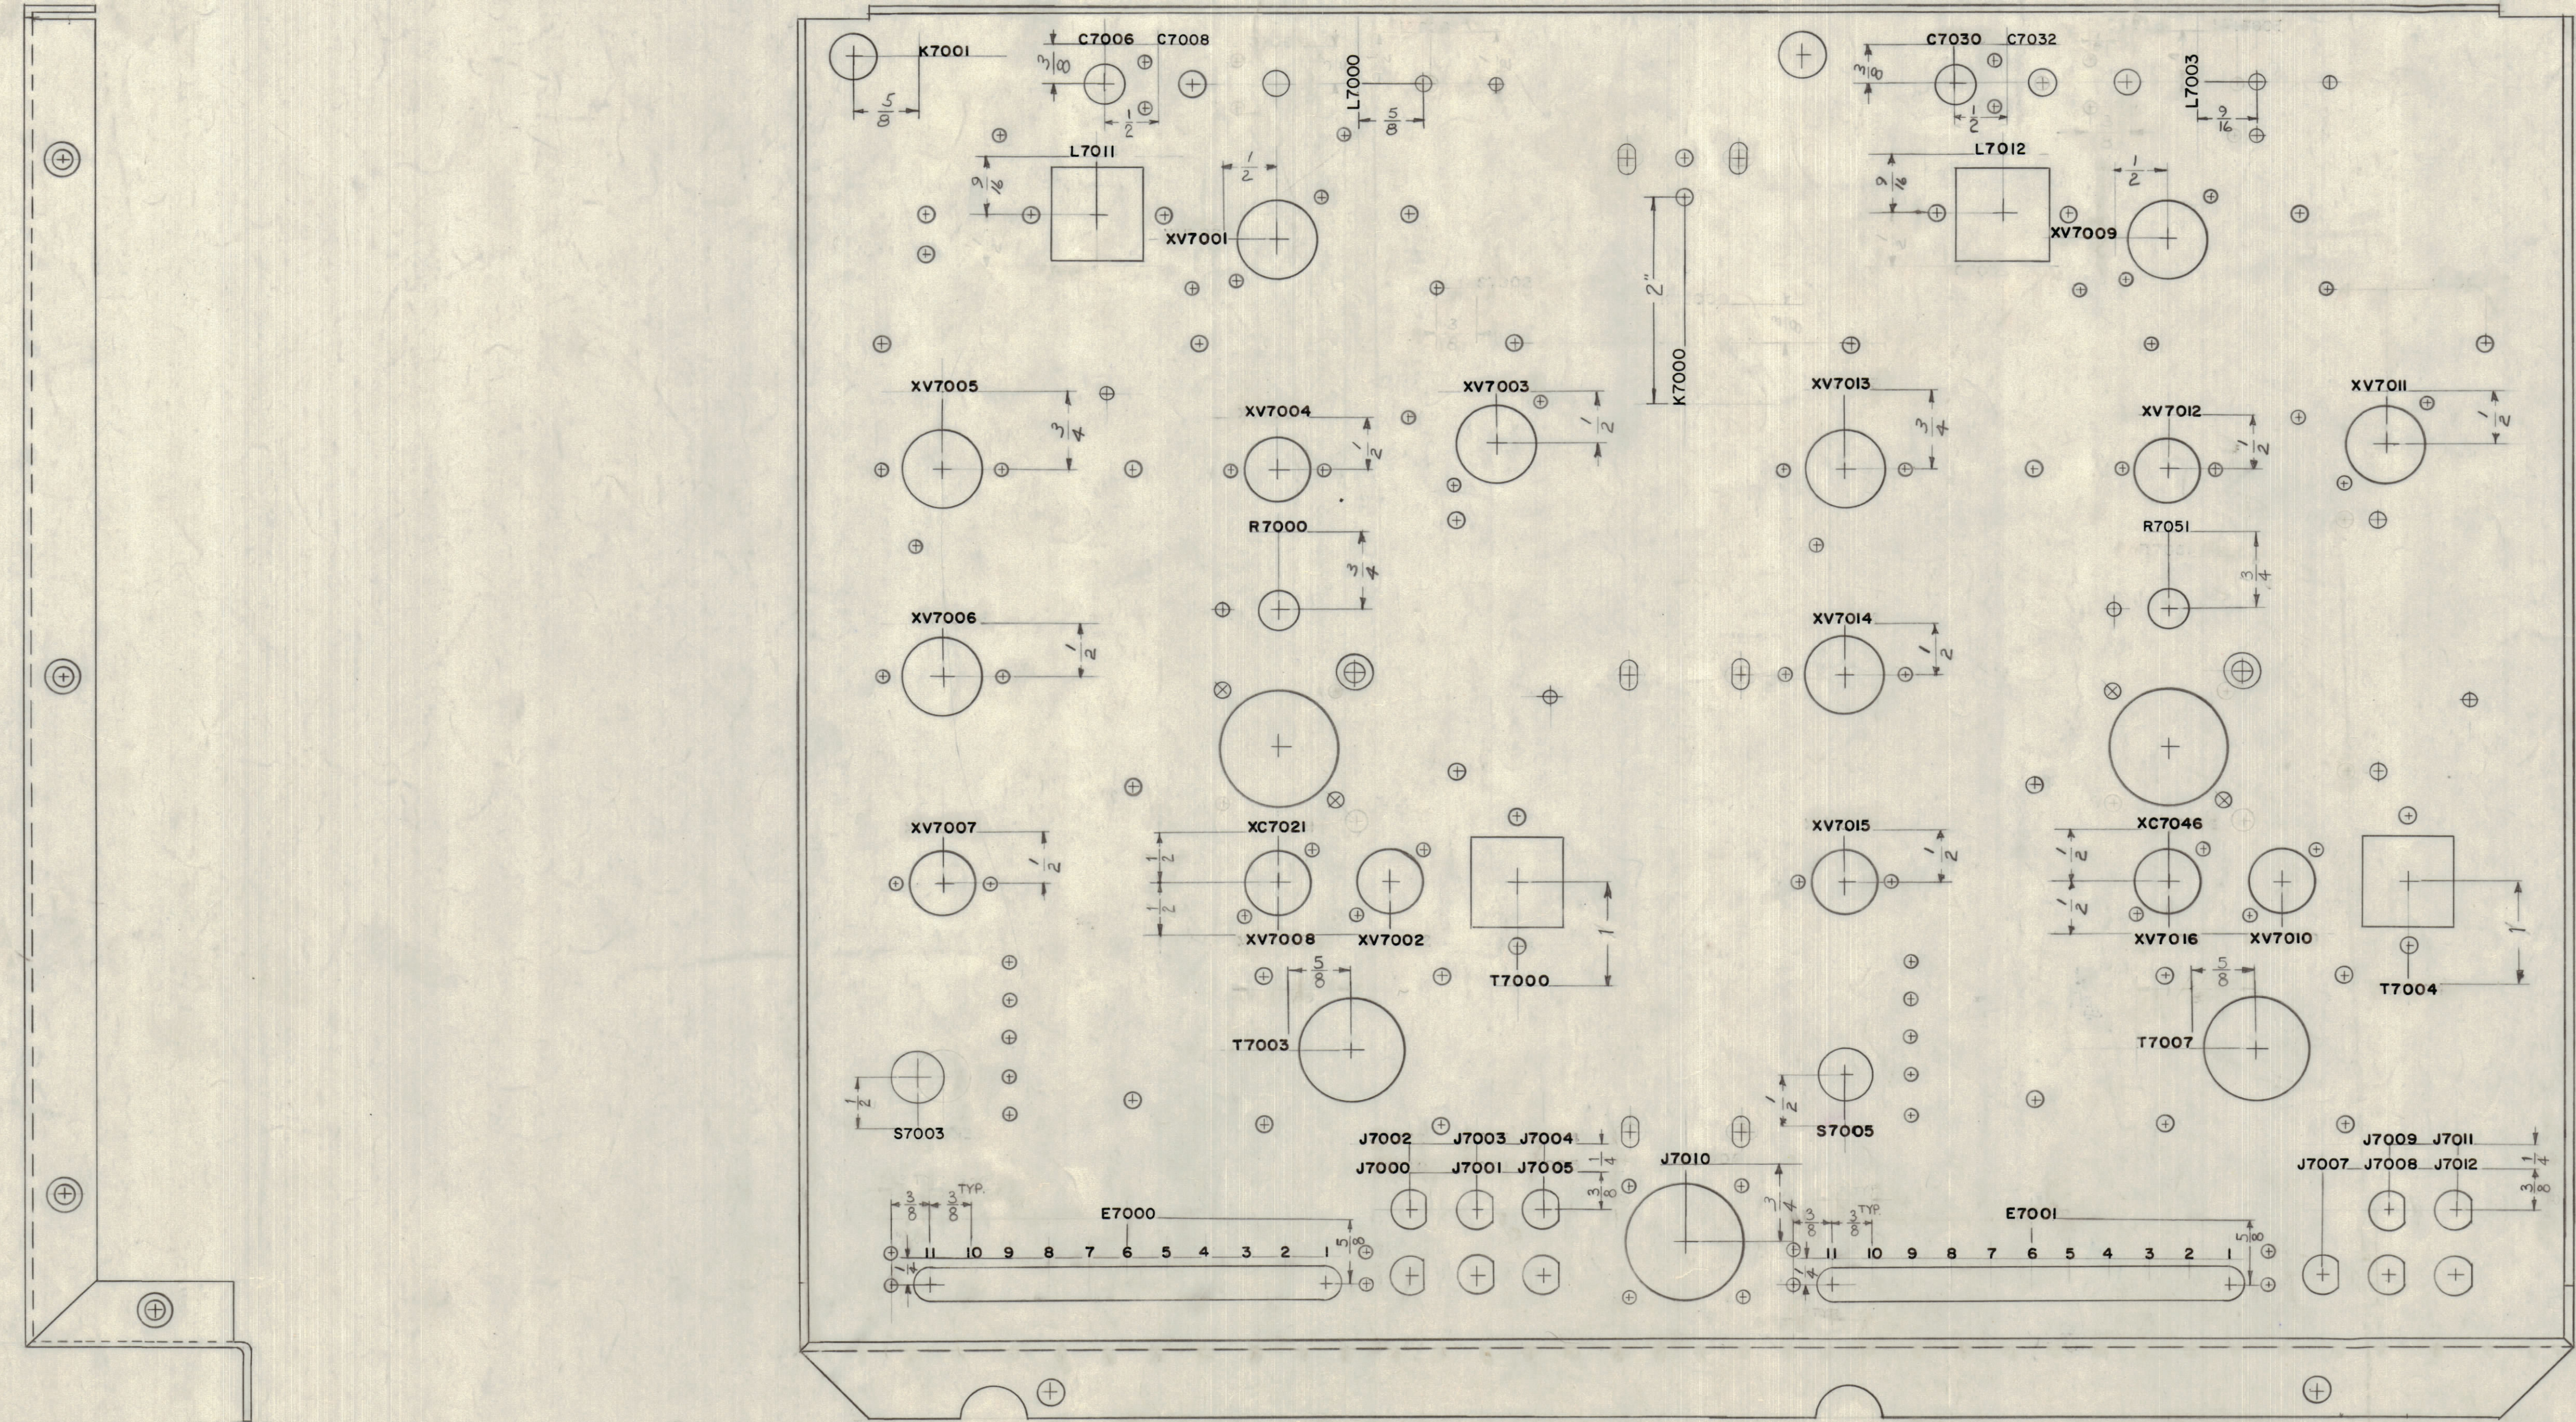

BOTTOM VIEW

ALL LETTERING TO BE IN HIGH, UNSTAINABLE, GOTHIC
 BLACK GOTHIC (LAI - PROCESS OR EQUIVALENT)

- 1) MARKING PROCESS: AS PER TMC SPECIFICATION S-727
- 2) LETTERING: 1/8" HIGH, UNSTAINABLE, GOTHIC, NORMAL LOCATED AS SHOWN
- 3) COLOR: 2) CLEAR UNSTAINABLE; 3) BLACK; 4) GILDING; 5) SYNTHETIC ENAMEL; 6) FED. SPEC. TYPE STAINLESS BLACK

MARKING PROCESS: AS PER TMC SPECIFICATION S-727
 LETTERING: 1/8" HIGH, BLACK, GOTHIC
 LOCATED AS SHOWN

SYM	ZONE	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
C		CLERICAL CHANGE	10-1-64				
B		SEE SHEET 1 OF 2, REV B	5-1-63	892B			
A		R7000, L7003, L7000 RELOCATED	10-31-62	7555			

UNLESS OTHERWISE SPECIFIED:
 DIMENSIONS ARE IN INCHES
 TOLERANCES ON
 FRACTIONS ± 1/64 DECIMALS ± .005 ANGLES ± 1/2°

SCALE
 MAXIMUM ALLOWABLE TOLERANCES HAVE
 BEEN DETERMINED AND ANY DEVIATIONS
 WILL BE CAUSE FOR REJECTION.
 REMOVE ALL BURRS & SHARP EDGES

REF: MS-2820 (RS)

REQ. PER UNIT	MODEL	SECTION	ASS'Y. NO.	DATE	FINISH & SPEC. NO.
1	HFA-1			7-26-62	
USED ON					TYPE & TEMPER
					HEAT TREAT. SPEC.
					ELEC. DES. APP.
					MECH. DES. APP.
					SHEET 2 OF 2

LD-1056 C