


REQ. PER UNIT	USED ON			LD 1609	Ø
	MODEL	ASS'Y. NO.	DATE		
	HFIR-1				

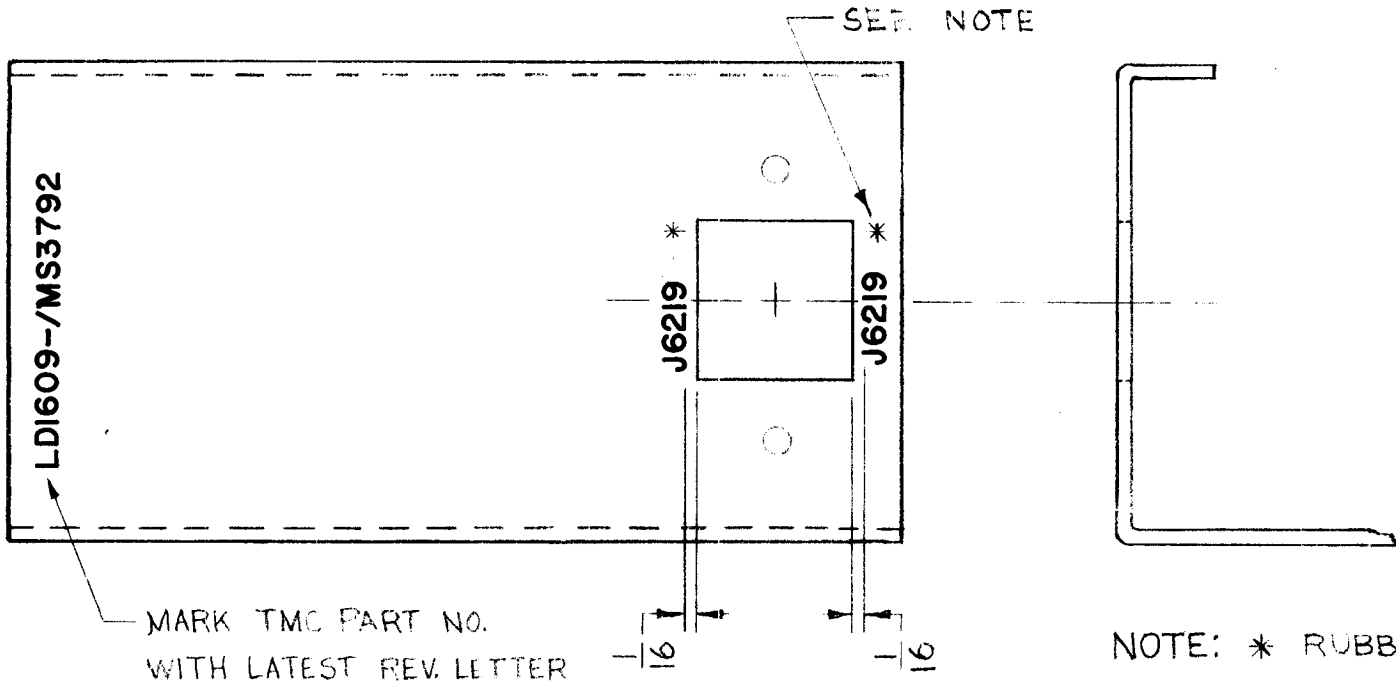

MARK TMC PART NO. WITH LATEST REV. LETTER

NOTE: * RUBBER STAMP PROPER SUFFIX NO. AS REQUIRED (BY TMC)

MARKING PROCESS: AS PER TMC SPECIFICATION S-727.
 LETTERING: 1/8 HIGH BLACK GOTHIC, LOCATED AS SHOWN.

SUFFIX NO.	DESCRIPTION	
-1	WAFER READ BACK	CHANNEL "A"
-2	LEDEX DRIVE	
-3	WAFER READ BACK	CHANNEL "B"
-4	LEDEX DRIVE	

REF: MS3792

REQ.	ITEM	PART NO.	EATON	DESCRIPTION	SYMBOL											
		---		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK												
Ø	ORIGINAL RELEASE FOR PRODUCTION	9-25-64	Ø	J.I.												
X	EXPERIMENTAL RELEASE	9-23-64	98	JM												
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	MATERIAL									
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE		---		---		---	---	---	---					
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005		FRACTIONS ± 1/64 ANGLES ± 0° 30'		TOLERANCES		CODE A	TYPE & TEMPER		HEAT TREAT. SPEC.		DRAWN J. J. ...		CHECKED R. B. ...		FINAL APPROVAL R. B. ...	
						FINISH & SPEC. NO.		---		ELEC. DES. APP. J. J. ...		MECH. DES. APP. R. B. ...		LD 1609 Ø		