REQ. PER UNIT	USED ON MODEL	ASS'Y. NO.	DATE	LD1610	Ø
	HFAR-1				

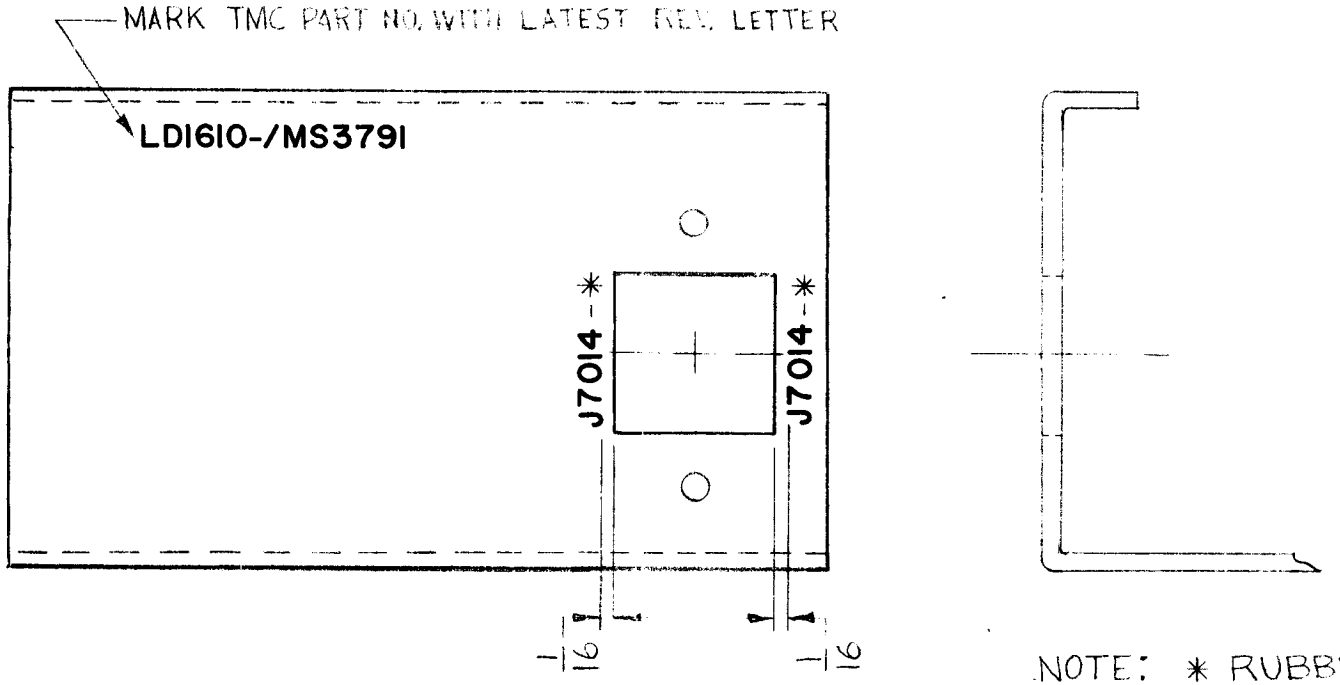

NOTE: * RUBBER STAMP PROPER SUFFIX NO. AS REQUIRED (BY TMC.)

SUFFIX NO.	DESCRIPTION	
-1	WAFER READ BACK	DETECTION SWITCH
-2	LEDEX DRIVE	
-3	WAFER READ BACK	MONITOR SWITCH
-4	LEDEX DRIVE	

MARKING PROCESS: AS PER TMC SPECIFICATION S-727.

LETTERING: 1/8 HIGH BLACK GOTHIC, LOCATED AS SHOWN.

REF: MS3791

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
Ø	ORIGINAL RELEASE FOR PRODUCTION	9.25.64	Ø	J.L.		
X	EXPERIMENTAL RELEASE	9.23.64	—	9.P.		SM

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

SCALE —"—

DECIMALS .X ± .05 .XX ± .01 .XXX ± 005 TOLERANCES FRACTIONS ± 1/64 ANGLES ± 0° 30'

CODE A

REQ.	ITEM	PART NO.

STOCK SIZE —"—

MATERIAL —"—

TYPE & TEMPER —"— HEAT TREAT. SPEC. —"—

FINISH & SPEC. NO. —"—

EATON DESCRIPTION SYMBOL

THE TECHNICAL MATERIEL CORP.
MAMARONECK. NEW YORK

MARKING, MOUNTING BRACKET
LEDEX

DRAWN	CHECKED	FINAL APPROVAL
J. Lewis		

ELEC. DES. APP.	MECH. DES. APP.		
FEE	B. Kaiser	LD1610	Ø