


REQ. PER UNIT	USED ON			LD1641	A
	MODEL	ASS'Y. NO.	DATE		
1	RTIA-1	A 4063	1-25-65		

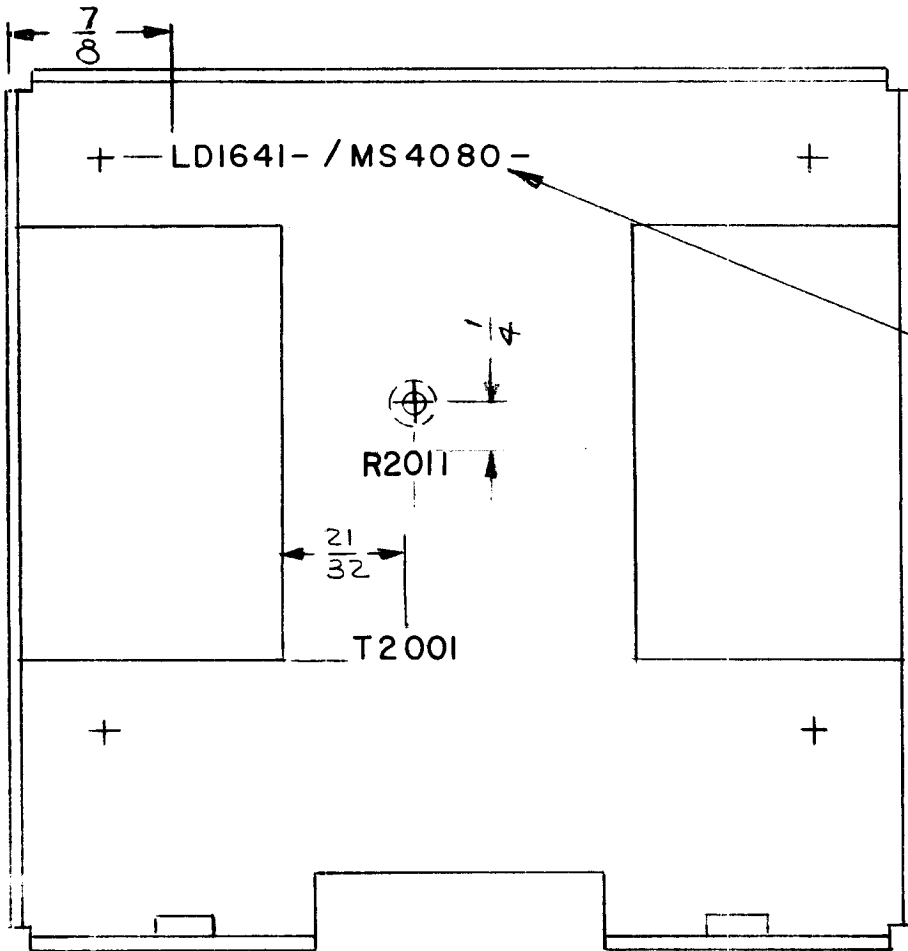

MARK TMC P/N WITH LATEST REVISION LETTER

MARKING PROCESS: AS PER TMC SPECIFICATION S-727.
 LETTERING: 1/8 HIGH BLACK GOTHIC, LOCATED AS SHOWN.

REF: MS4080

REQ.	ITEM	PART NO.	EATON	DESCRIPTION	SYMBOL		
A	R2011 ADDED	12/2/65	15274	JCB JCB			
Ø	ORIGINAL RELEASE FOR PRODUCTION	2-8-65	Ø	J.F.			
X2	REDRAWN - NO CHANGES	1-25-65	X2	J.M.			
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE					
		1:1					
DECIMALS	TOLERANCES	FRACTIONS	CODE				
.X ± .05		± 1/64	A				
.XX ± .01		ANGLES					
.XXX ± .005		± 0° 30'					
FINISH & SPEC. NO.		TYPE & TEMPER		HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL
					JCB	W. JORDAN	LD1641
					2/8/65	2/8/65	A
					ELEC. DES. APP.	MECH. DES. APP.	