


| | | | | | |
|---------------|-----------|------------|---------|--------|---|
| REQ. PER UNIT | USED ON | | | LD1696 | Ø |
| | MODEL | ASS'Y. NO. | DATE | | |
| 1 | GPT-10KLF | | 11-4-65 | | |

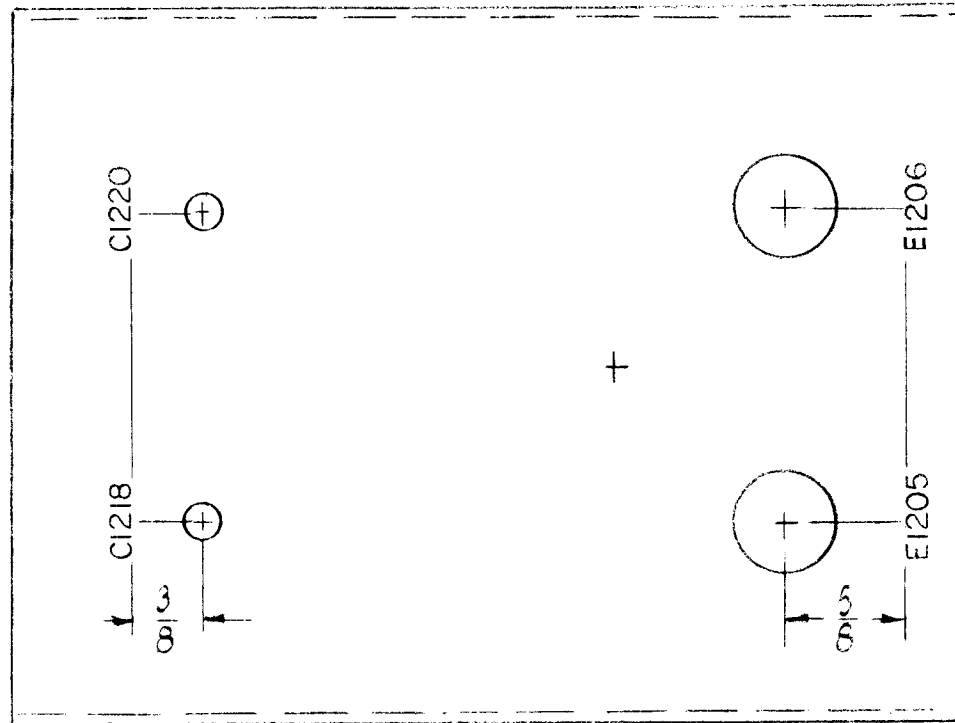

MARK TMC P/N
(LD1696)
1/8 HIGH GOTHIC
W/LATEST REV
LETTER.
(ON LIP)

MARKING PROCESS: AS PER TMC SPECIFICATION S-727.

LETTERING: 1/8 HIGH BLACK GOTHIC, LOCATED AS SHOWN.

REF: MS 4211

| REQ. ITEM | PART NO. | F. BUDETTI | | | DESCRIPTION | SYMBOL |
|---|------------------|---|---------|-------------------|-------------|-----------------|
| | | THE TECHNICAL MATERIEL CORP. | | | | |
| | | MAMARONECK, NEW YORK | | | | |
| | | MARKING, BRACKET, MTG, ALDC | | | | |
| | | MARKING PROCESS: AS PER TMC SPEC. S727 | | | | |
| Ø | ORIGINAL RELEASE | 12/21/65 | | | | |
| X1 | E1206 WAS C1206 | 11-16-65 | X1 | | | |
| SYM | DESCRIPTION | DATE | CH. NO. | DRAFTS | CHECKER | ENG. APP. |
| UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES | | SCALE | | | | |
| DECIMALS .X ± .05 .XX ± .01 .XXX ± .005 | | FRACTIONS ± 1/64 ANGLES ± 0° 30' | | CODE A | | |
| TOLERANCES | | FINISH & SPEC. NO. | | | | |
| | | TYPE & TEMPER | | HEAT TREAT. SPEC. | | DRAWN |
| | | | | | | CHECKED |
| | | | | | | FINAL APPROVAL |
| | | | | | | ELEC. DES. APP. |
| | | | | | | MECH. DES. APP. |
| | | | | | | LD1696 |
| | | | | | | Ø |