
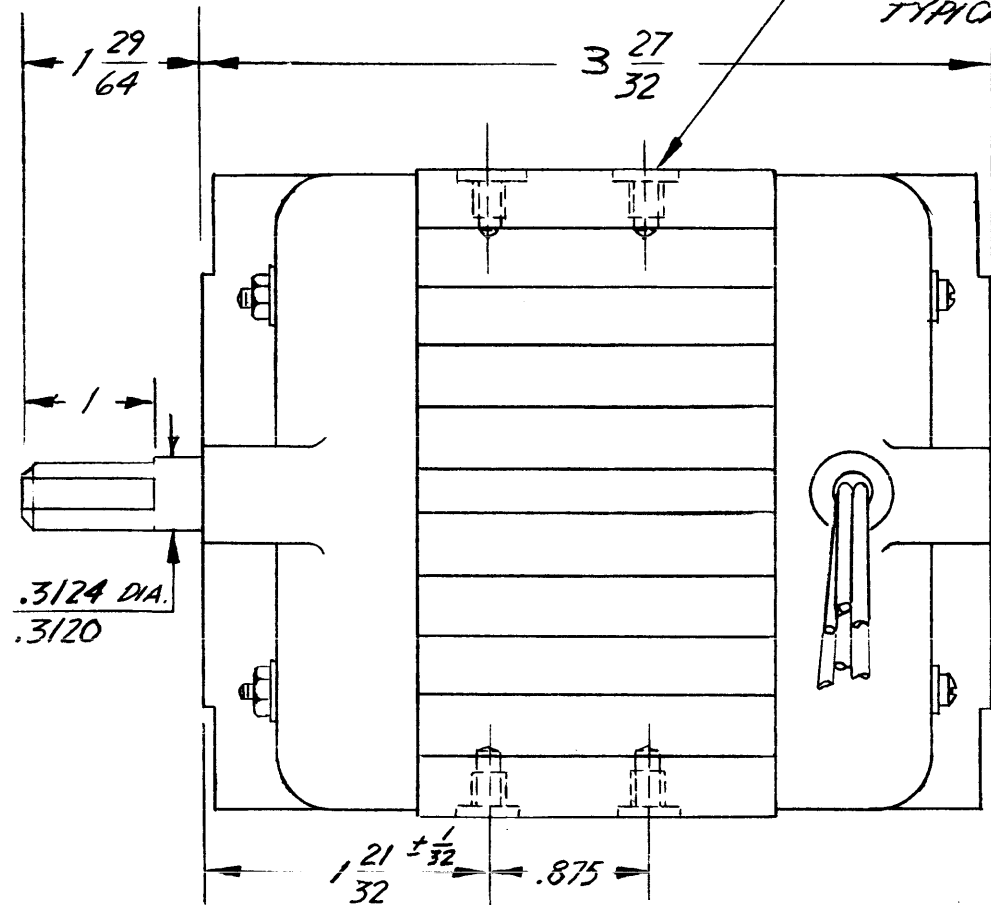




MO-113
A

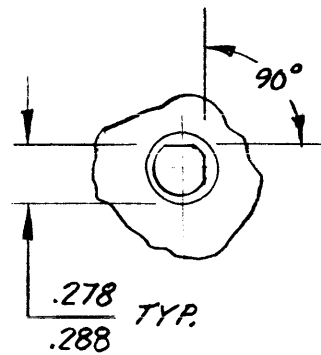

10-32 NF-2 TAP $\frac{1}{4}$ DEEP
C'BORE $\frac{9}{16}$ DIA. X $\frac{1}{16}$ DEEP
TYPICAL BOTH SIDES AS SHOWN.
(4 REQ.)

NAMEPLATE

6 LEADS - 18" LONG

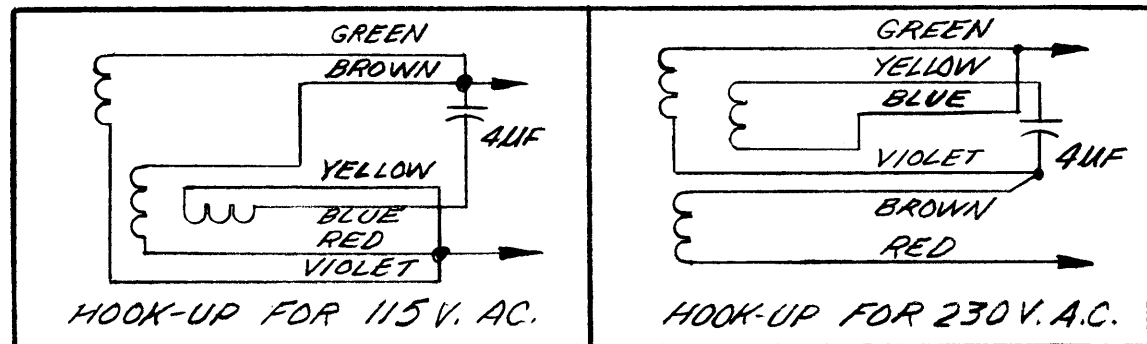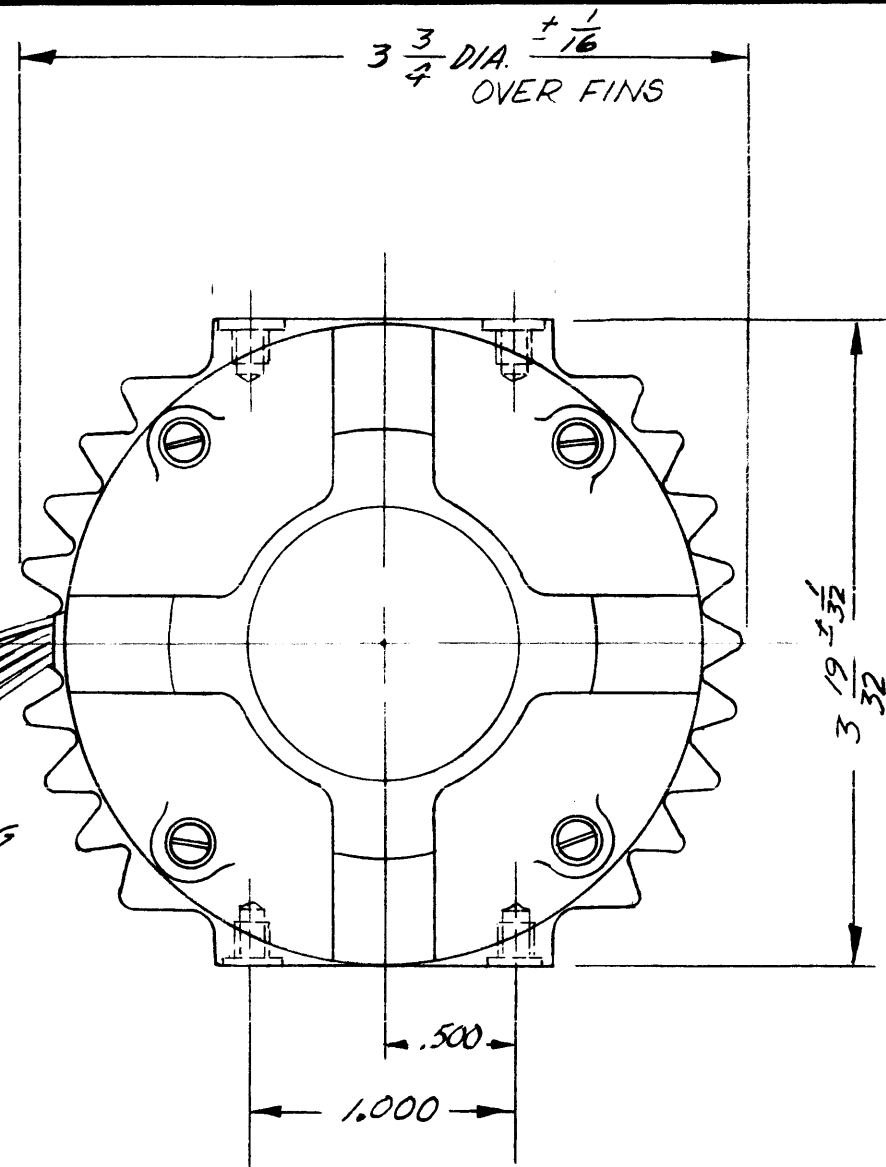

CONNECTION DIAGRAM CLOCKWISE ROTATION LEAD END

ELECTRICAL DATA
 VOLTAGE 115V/230V
 CPS 50/60 CY.
 RPM 3400 RPM
 PHASE 1
 LINE CURRENT 1.0/0.5 A.

NOTE: THIS MOTOR IS FOR SPARE PARTS REPLACEMENT PURPOSES FOR TMC AXIAL FAN NO. BL-105.

| | | | | | | | | | |
|--|--|---|------|---------|--------|---------|-----------|-------------|-------------|
| A | ADDED BL-105 ON USED ON CHART LINE CURRENT ADDED, MFR NO WAS BC 2922-B ON ELEC. DATA VOLT. WAS 115V., RPM WAS 1650 DIMS CLARIFIED | | | | | 7-10-63 | 9493 | <i>J.P.</i> | <i>J.P.</i> |
| | SYM | DESCRIPTION | DATE | CH. NO. | DRAFTS | CHECKER | ENG. APP. | | |
| UNLESS OTHERWISE SPECIFIED: | | SCALE: S40-116 (BC 2922-F10) | | | | | | | |
| DIMENSIONS ARE IN INCHES | | MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. | | | | | | | |
| TOLERANCES ON FRACTIONS ± 1/64 DECIMALS ± .005 ANGLES ± 1/2° | | REMOVE ALL BURRS AND SHARP EDGES | | | | | | | |

| | | | | |
|---------------|--------|---------|------------|------|
| 1 | BL-105 | | | |
| REQ. PER UNIT | MODEL | SECTION | ASS'Y. NO. | DATE |
| USED ON | | | | |

| REQ. | ITEM | PART NO. | DESCRIPTION | SYMBOL |
|--------------------|-------------------|-----------------|--|----------------|
| | | | THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK | |
| STOCK SIZE | | | MOTOR, FAN FOR BL-105 | |
| MATERIAL | | | <i>wh</i> | <i>J.P.</i> |
| TYPE & TEMPER | HEAT TREAT. SPEC. | DRAWN | CHECKER | FINAL APPROVAL |
| | | <i>J.P.</i> | <i>J.P.</i> | <i>J.P.</i> |
| FINISH & SPEC. NO. | | ELEC. DES. APP. | MECH. DES. APP. | |
| | | | | MO-113 A |