


STANDARD DRAWING

MO130 B

REVISIONS

SYM	DESCRIPTION	DATE	E.M.N. NO.	DRAFT	CHKD	APPD
	ORIGINAL RELEASE FOR PRODUCTION	9/14/65	2	H.V.S.		
A	ADDED REF TO 3-9/64 DIM' CHART ADDED "SEE CHART" IN SPECS WAS 2 RPM	11/10/66	17197	RME	X/S	R
B	BLACK ANODIZE ALUM. WAS STAINLESS STEEL	6.3.68	18946	H.S.	J/S	FB

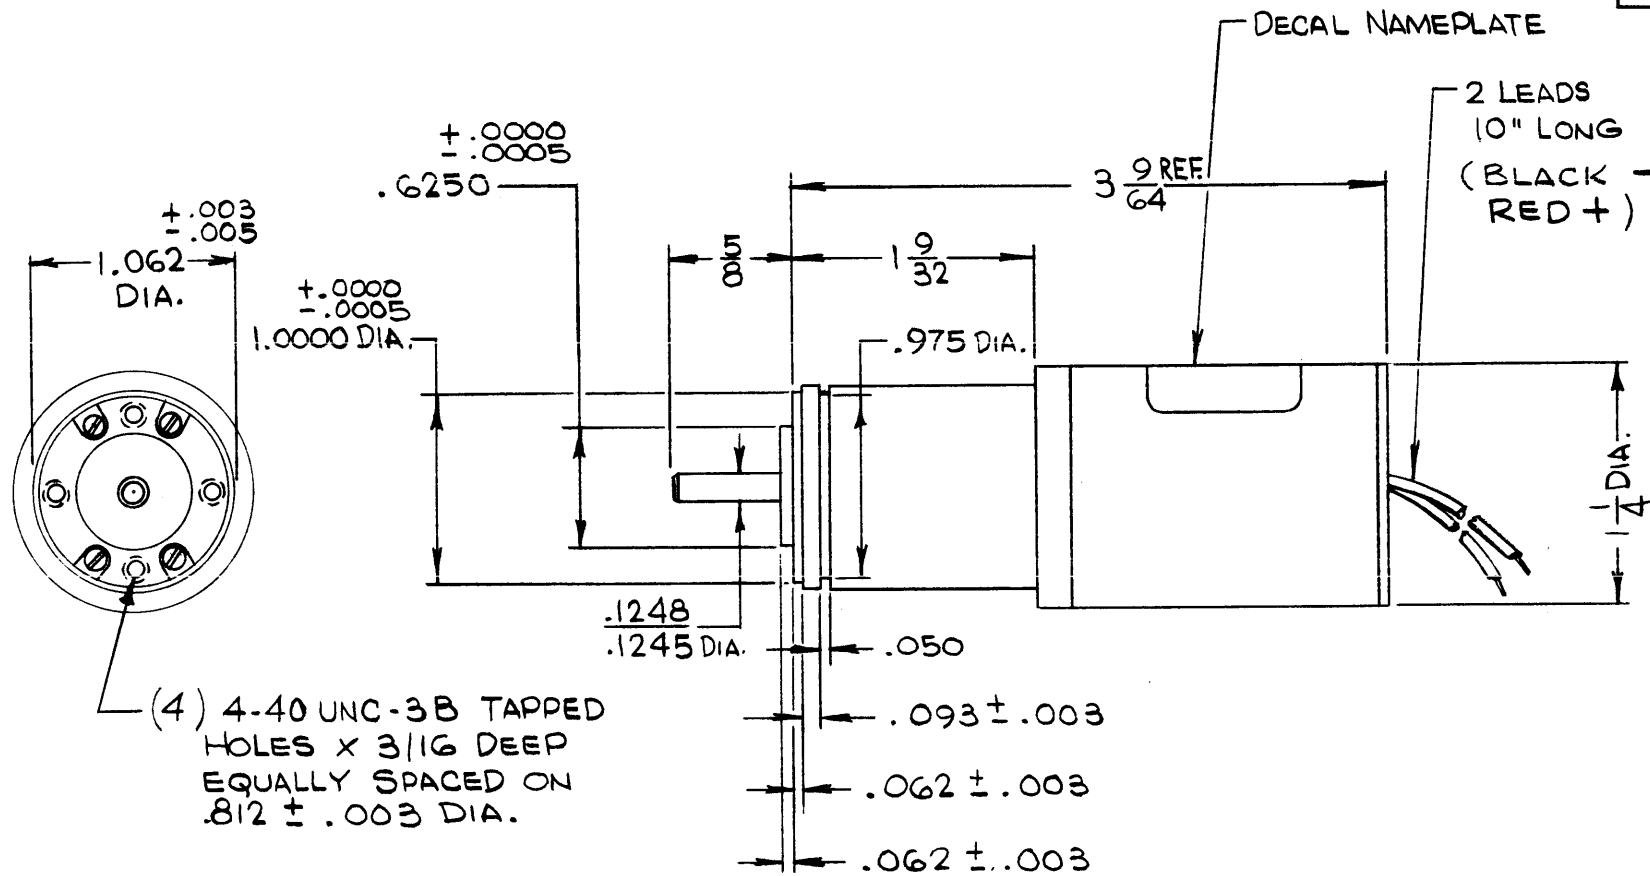

(4) 4-40 UNC-3B TAPPED HOLES X 3/16 DEEP EQUALLY SPACED ON .812 ± .003 DIA.

SPECIFICATIONS

OPERATING VOLTAGE : 24 VDC

OPERATING CURRENT : 0.10 A

TORQUE : 7 OZ. IN.

SPEED : SEE CHART

FINISH : MOTOR : BLACK ANODIZE

GEAR HEAD : BLACK ANODIZED ALUMINUM

CCW ROTATION FACING SHAFT END

TMC P/N	SPEED
MO130	2 RPM
MO130-2	5 RPM

REQ'D.	ITEM	PART NUMBER	DESCRIPTION	SYMBOL
--------	------	-------------	-------------	--------

BUDETTI

LIST OF MATERIAL

MATERIAL	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK		
FINISH	TITLE MOTOR, D.C. GEAR		

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES	DRAWN H. AUSTIN	DATE 9-8-65	FINAL APPROVAL <i>[Signature]</i>	DATE 9/10/65
DECIMALS .X ± .05 .XX ± .01 .XXX ±	CHECKED <i>[Signature]</i>	DATE 9/9/65	MO130	B
FRACTIONS ± 1/64 ANGLES ± 0° 30'	ELECT. DES. <i>[Signature]</i>	DATE 9/9/65		

1	TSTE-10K	ASS'Y. NO.
Q'TY./UNIT	MODEL USED ON	
SCALE	CODE	S401-11G(BD1206G-8)

THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.

NOTES