MR-136 | A

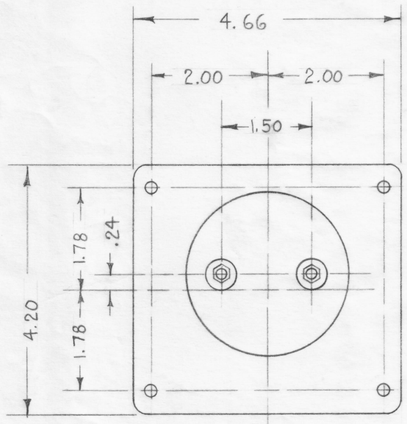

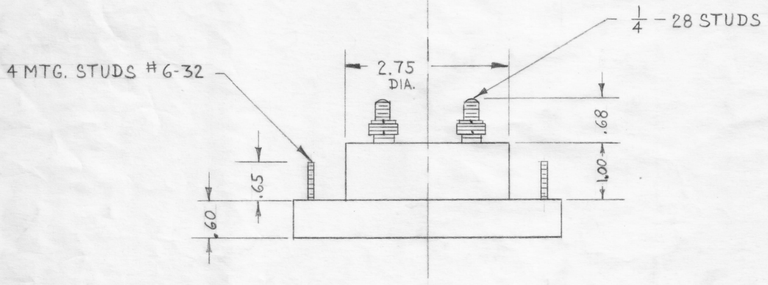



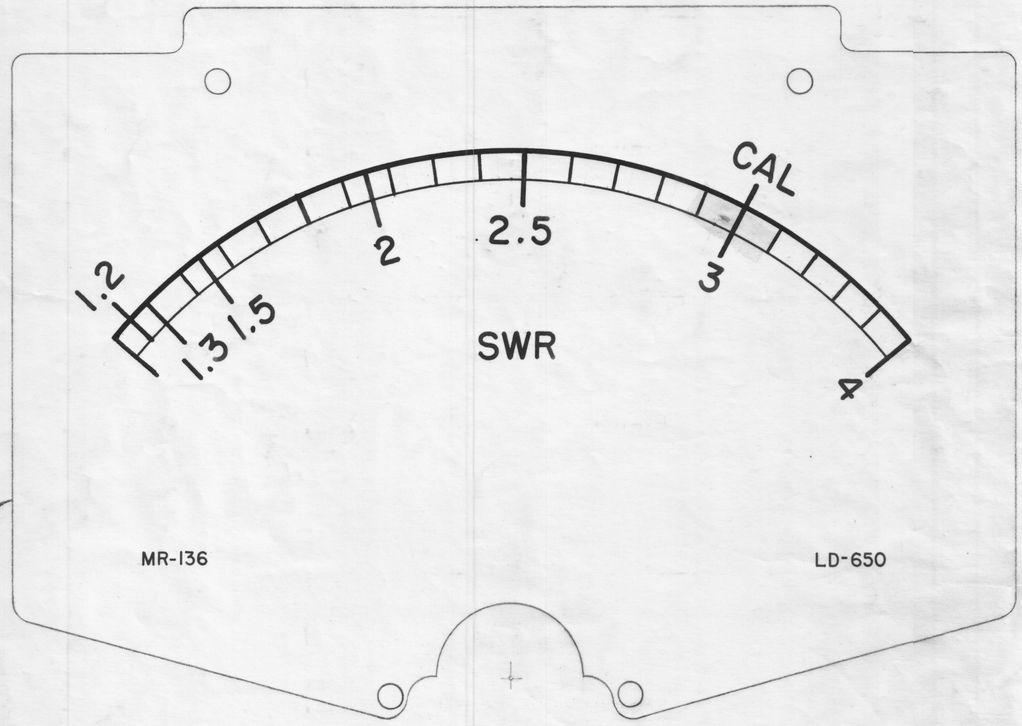

SCALE = 2X

"A"
INSERT TMC INSIGNIA
IMMEDIATELY BELOW WORD SWR
CENTERED TO BOTTOM

FOR ALTERNATE METHOD OF
PURCHASE & ASS'Y SEE TMC SPEC
S467

THIS METER TO BE USED FOR SPARE PARTS ONLY. ALL NEW GPT-40K's WILL USE MR-146.

NOTES
CASE - STANDARD COMMERCIAL RECTANGULAR 4½
FINISH - GLOSSY BLACK
MOVEMENT : 0-200 MICRO AMPS
APPROX. RESISTANCE : 1000Ω
POINTER - SPADE TYPE
HARDWARE - TWO FLAT WASHERS AND 1/4-28
HEX. NUTS FOR TERMINALS
FOUR LOCKWASHERS AND FOUR 6-32 HEX NUTS
FOR MOUNTING SUPPLIED BY MFG.

ISSUE	ZONE	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
A	C12	'SPARE PARTS' NOTE ADDED,	11-29-60	3594	DRM	JCB	

TOLERANCES
DEC. DIM. ±
FRAC. DIM. ±
ANGULAR DIM. ±

SCALE:
MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION.
REMOVE ALL BURRS AND SHARP EDGES

REQ PER UNIT	MODEL	SECTION	ASS'Y. NO.	DATE
1	GPT-40K	AT-101		4-13-60

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
		STOCK SIZE		
		MATERIAL		
		TYPE & TEMPER		
		HEAT TREAT. SPEC.		
		FINISH & SPEC.		

THE TECHNICAL MATERIEL CORP.
MAMARONECK. NEW YORK

SWR, METER

DRAWN	ELEC. DES. APP.	MECH. DES. APP.
CHECKED	FINAL APPROVAL	
	MR-136	A

FORM-110