

SPECIFICATIONS:



CASE: STANDARD COMMERCIAL RECTANGULAR 3-1/2".
 FINISH: BLACK MATT FINISH WITH LINE DESIGN AS SHOWN.
 MOVEMENT: 0-50 MICROAMP.
 APPROX. RESISTANCE: 2000 OHMS.
 POINTER: KNIFE EDGE
 HARDWARE: (TO BE SUPPLIED BY MFG) ④ FLAT WASHERS (#4) AND
 ④ 4-40 HEXAGON NUTS. ② 1/4 FLAT WASHERS
 AND ② 1/4 - 28 HEXAGON NUTS.

SCALE COLORING CHART	
CALIBRATION LINES	BLACK
BACKGROUND	WHITE
NUMERALS 0-50	BLACK
" 0-25	RED
" 0-100	GREEN
MR-150 AND TMC	BLACK


NOTE
 INDICATE POSITIVE POLE
 NEAR THE APPROPRIATE
 TERMINAL

MR-150 A

SEE DETAIL AT LEFT FOR DIAL FACE.

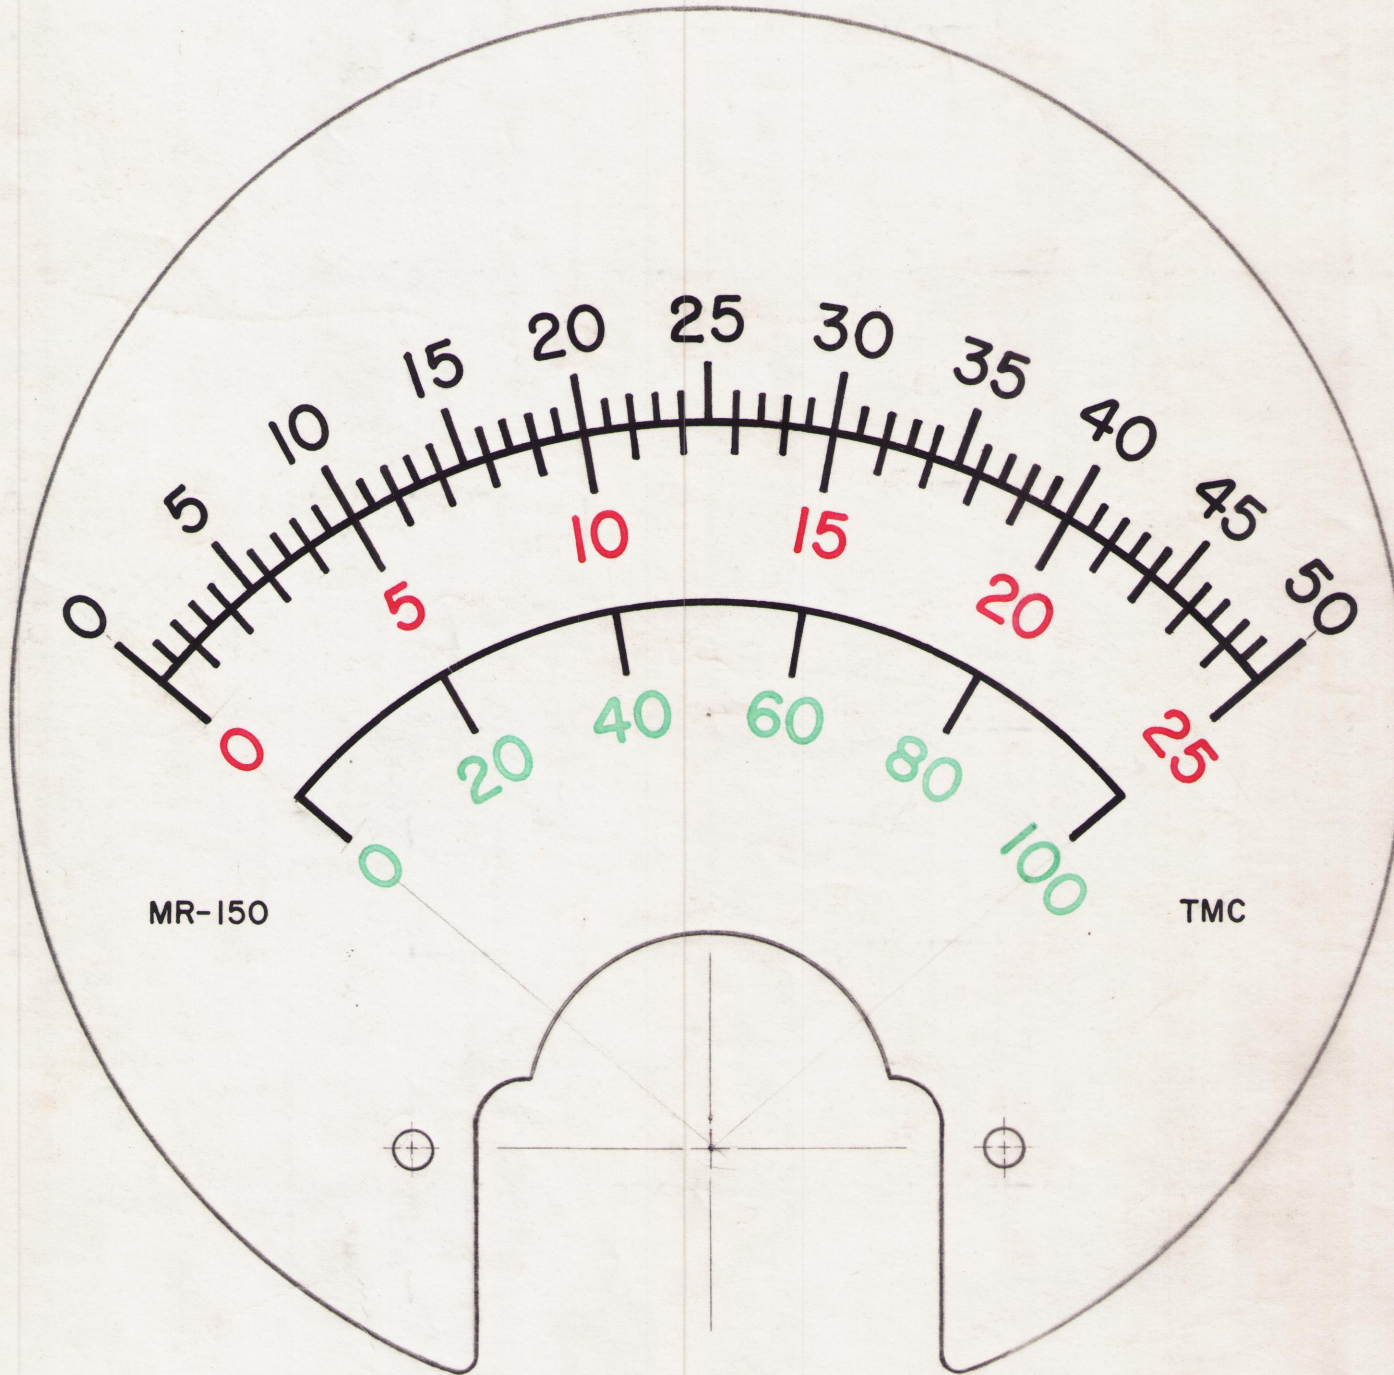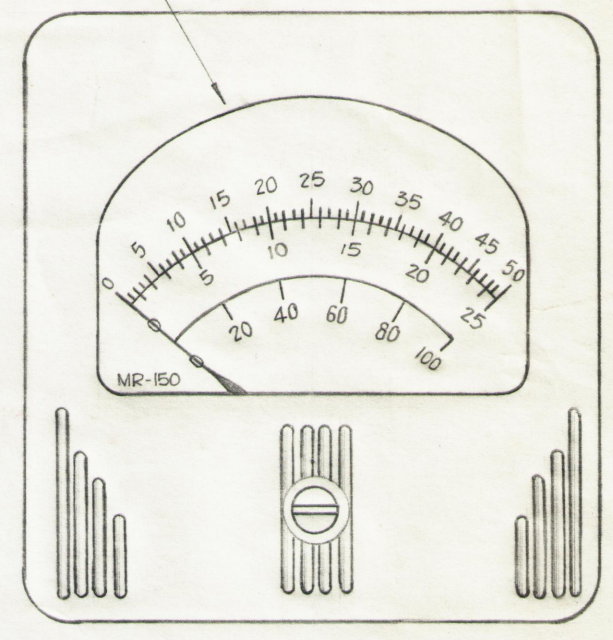

SCALE = 3X
 (TRUE SIZE = 2-7/16D)

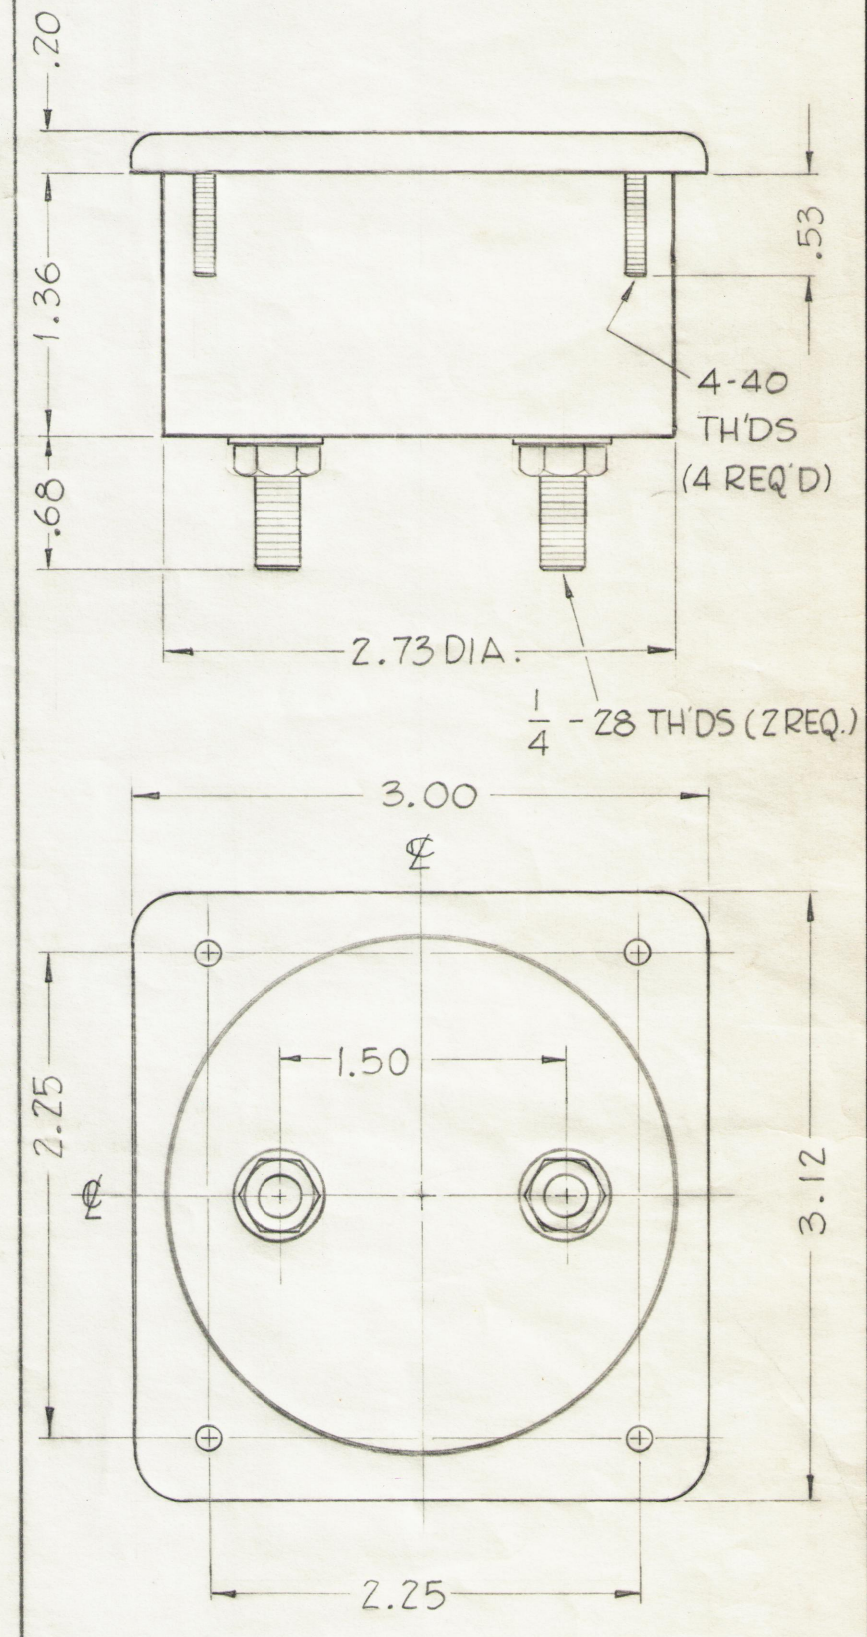

SYM	ZONE	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
A	H3	NOTE ADDED 4-40 HEX NUTS WERE 4-36, 4-40 THRS WERE 4-36	12-19-61	6036	GG	RK	

UNLESS OTHERWISE SPECIFIED:
 DIMENSIONS ARE IN INCHES
 TOLERANCES ON
 FRACTIONS ± 1/64 DECIMALS ± .005 ANGLES ± 1/2°

SCALE FULL, Do Not SCALE

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS & SHARP EDGES

REQ. PER UNIT	MODEL	SECTION	ASS'Y. NO.	DATE
1	RFD-1A			1-6-61

USED ON

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
		MULTI-METER, DC MICROAMP	
		John C. Biele	
		TYPE & TEMPER	HEAT TREAT. SPEC.
		FINISH & SPEC. NO.	
		ELEC. DES. APP.	MECH. DES. APP.
		SHEET	OF

MR-150 A