


REQ. PER UNIT	USED ON			MS-1049 C
	MODEL	ASS'Y. NO.	DATE	
2	TER-5000	A-1431(8)	4-30-57	

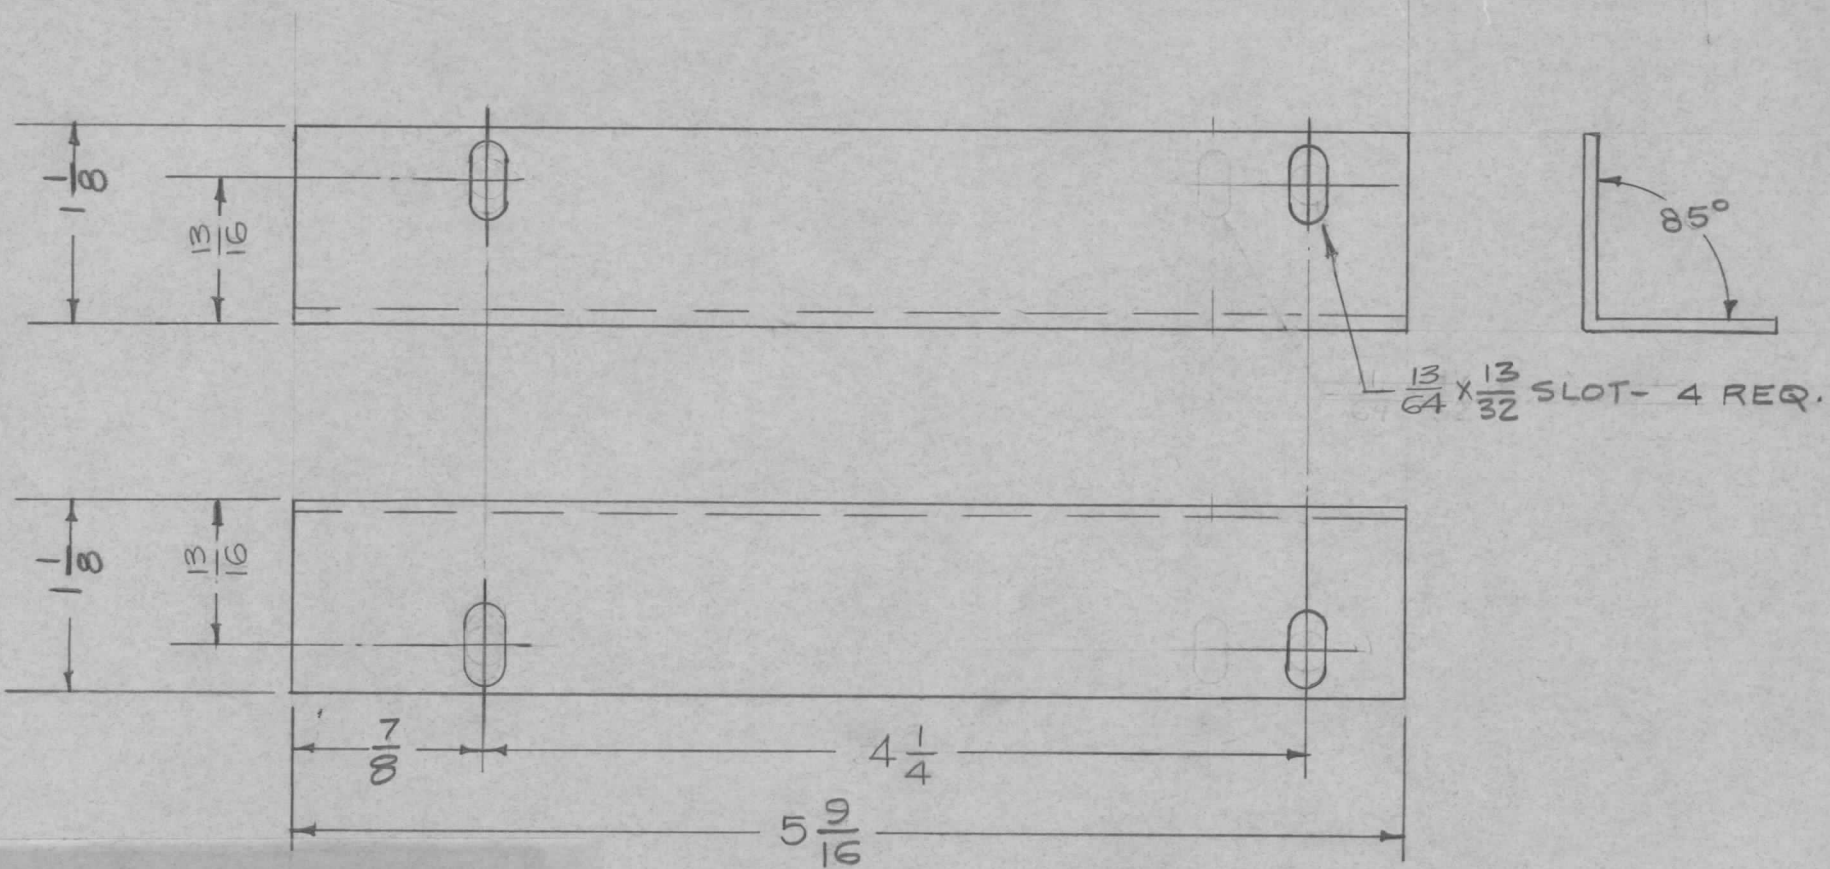

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES AND INCLUDE
CHEMICALLY APPLIED OR PLATED FINISHES

DECIMALS	TOLERANCES	FRACTIONS
.X ± .05		± 1/64
.XX ± .01		ANGLES
.XXX ± .005		± 0° 30'

CUT HERE
GUARANTEED
2-66

FINISH:
S-404 IRIDITE
S-114 ZINC CHROMATE PRIMER
S-115 GRAY ENAMEL

C	1	S404 IRIDITE ADDED	4/10/59	-	JLQ			REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL	
B	1	7/8 WAS 1" 59/16 DIA WAS 55/8 1/8 WAS 1 HOLES WERE 13/64 D.	2/1/59	732	16	JLQ	EG.	.064 THK		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK		
A	1	OVERALL DIM. WAS 5 3/4	9/17/57	1	SE	JLQ		STOCK SIZE		MOLDING, TOP CORNER, FRONT (TER-5000)		
ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	MATERIAL				
TOLERANCES			SCALE: FULL				5052-H32	164-30-57				
DEC. DIM. ± FRAC. DIM. ± ANGULAR DIM. ±			MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES				TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL	
							SEE NOTE				MS-1049 C	
							FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.			