


REQ. PER UNIT	USED ON			MS-1066	A
	MODEL	ASS'Y. NO.	DATE		
1	A-1421		7-26-57		

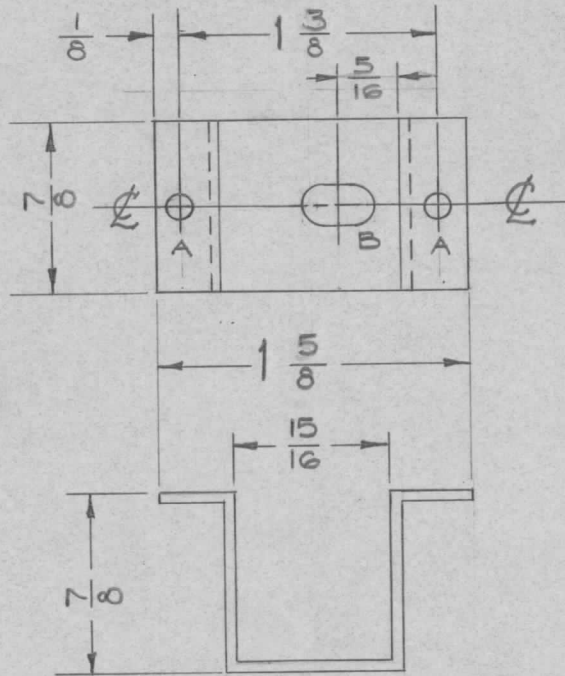

A- #29 Drill 2 Req.
 B- 13/64 X 13/32 1 Req.

NOTE:
 S404-IRIDITE IP
 S101 CAUSTIC DIP

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES	
DECIMALS	FRACTIONS
.X ± .05	± 1/64
.XX ± .01	ANGLES
.XXX ± .005	± 0° 30'

CUT HERE
 GUARANTEED
 2-66

REQ.	ITEM	PART NO.	DESCRIPTION				SYMBOL
		.064	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK				
		STOCK SIZE	BRACKET, RETAINING				
		ALUMINUM	POWER STRIP				
		MATERIAL					
A	1	5052-H32	7-26-57	Jude	Jim		
ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
		S404-IRIDITE WAS S101-CAUSTIC DIP	12-8 59	1001	EP		EMN
TOLERANCES			SCALE:				
DEC. DIM. ±			MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION.				
FRAC. DIM. ±			REMOVE ALL BURRS AND SHARP EDGES				
ANGULAR DIM. ±			FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.	
			SEE NOTE				MS-1066 A