

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES AND INCLUDE
CHEMICALLY APPLIED OR PLATED FINISHES



DECIMALS
.X ± .05
.XX ± .01
.XXX ± .005

TOLERANCES

FRACTIONS
± 1/64
ANGLES
± 0° 30'

CUT HERE
GUARANTEED
2-56

REQ. PER UNIT	USED ON			MS-1068 B
	MODEL	ASS'Y. NO.	DATE	
2	TER-5000	TD-179	5-29-57	

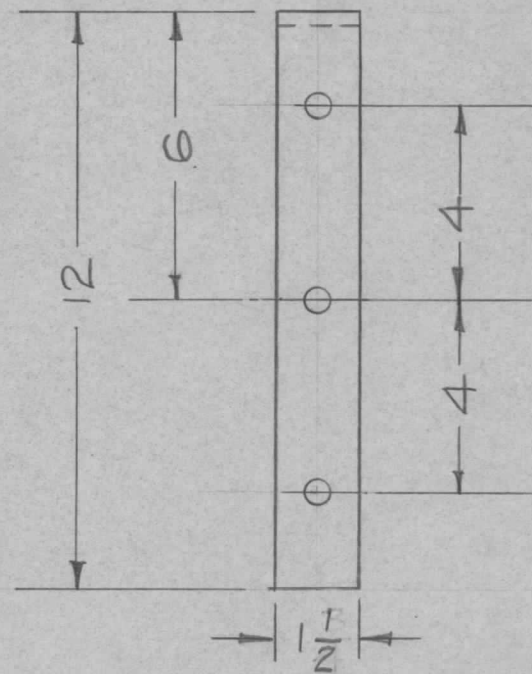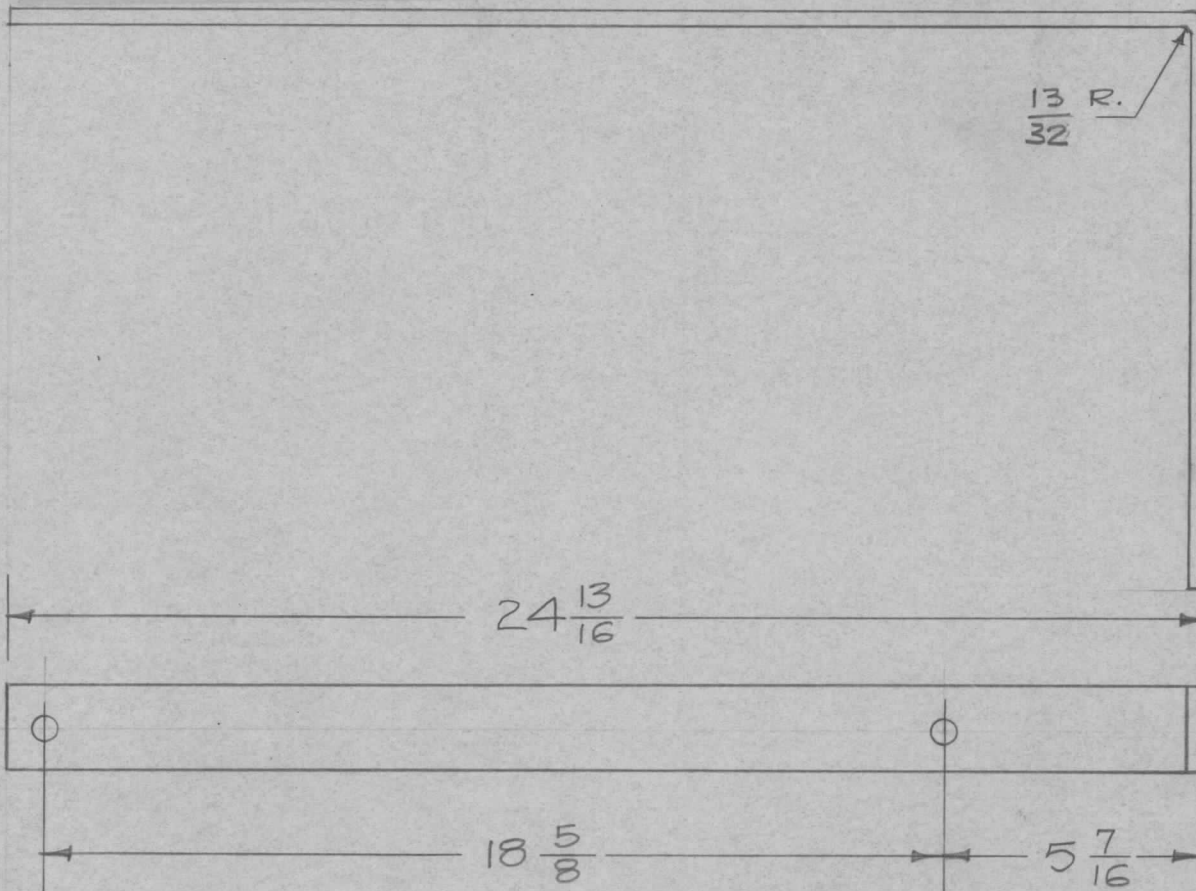

All Holes 5/8 Dia.
5 Req.

FINISH:
S404 IRIDITE
S-114 ZINC CHROMATE PRIMER
S-115 GRAY ENAMEL

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL			
B	1	S404 IRIDITE ADDED	6/16/53	-	JL					THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	BRACKET, TOP, MOUNTING (TER-5000)			
A	3	6063 T5 WAS 2024 T5	9						1/4" THK.					
	2	13/32 R. WAS 1/8 R.	9						STOCK SIZE					
	1	1 1/2 WAS 1 3/4	57	1					ALUMINUM					
TOLERANCES								MATERIAL						
SCALE:			6063 T5		165-29-57		JMS		MS-1068 B					
DEC. DIM. ±			MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION.		TYPE & TEMPER		HEAT TREAT. SPEC.		DRAWN		CHECKED		FINAL APPROVAL	
FRAC. DIM. ±			REMOVE ALL BURRS AND SHARP EDGES		SEE NOTE 1									
ANGULAR DIM. ±					FINISH & SPEC. NO.		ELEC. DES. APP.		MECH. DES. APP.					