




IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.		DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED					
MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES.							
ISSUE	ITEM	CHANGED FROM	DATE	CN. NO.	DRAFTS	CHECKER	ENG. APP.
Ø		REL TO PROD	25 SEPT 67				
A		REV AS PER CEMN	31 MAY 69				

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
4	1	NT129-440-4	NUT, SWAGE	A
4	2	TE164-6	NUT, PLAIN CLINCH	C

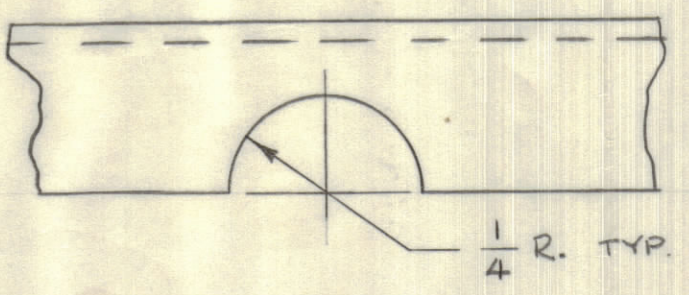

DETAIL "A"
(2 REQ'D)

- UNLESS OTHERWISE SPECIFIED:
1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
 2. ALL ANGULAR BENDS 90 DEGREES
 3. REMOVE ALL BURRS AND SHARP EDGES
 4. MOUNT INSERTS AFTER FINISHING

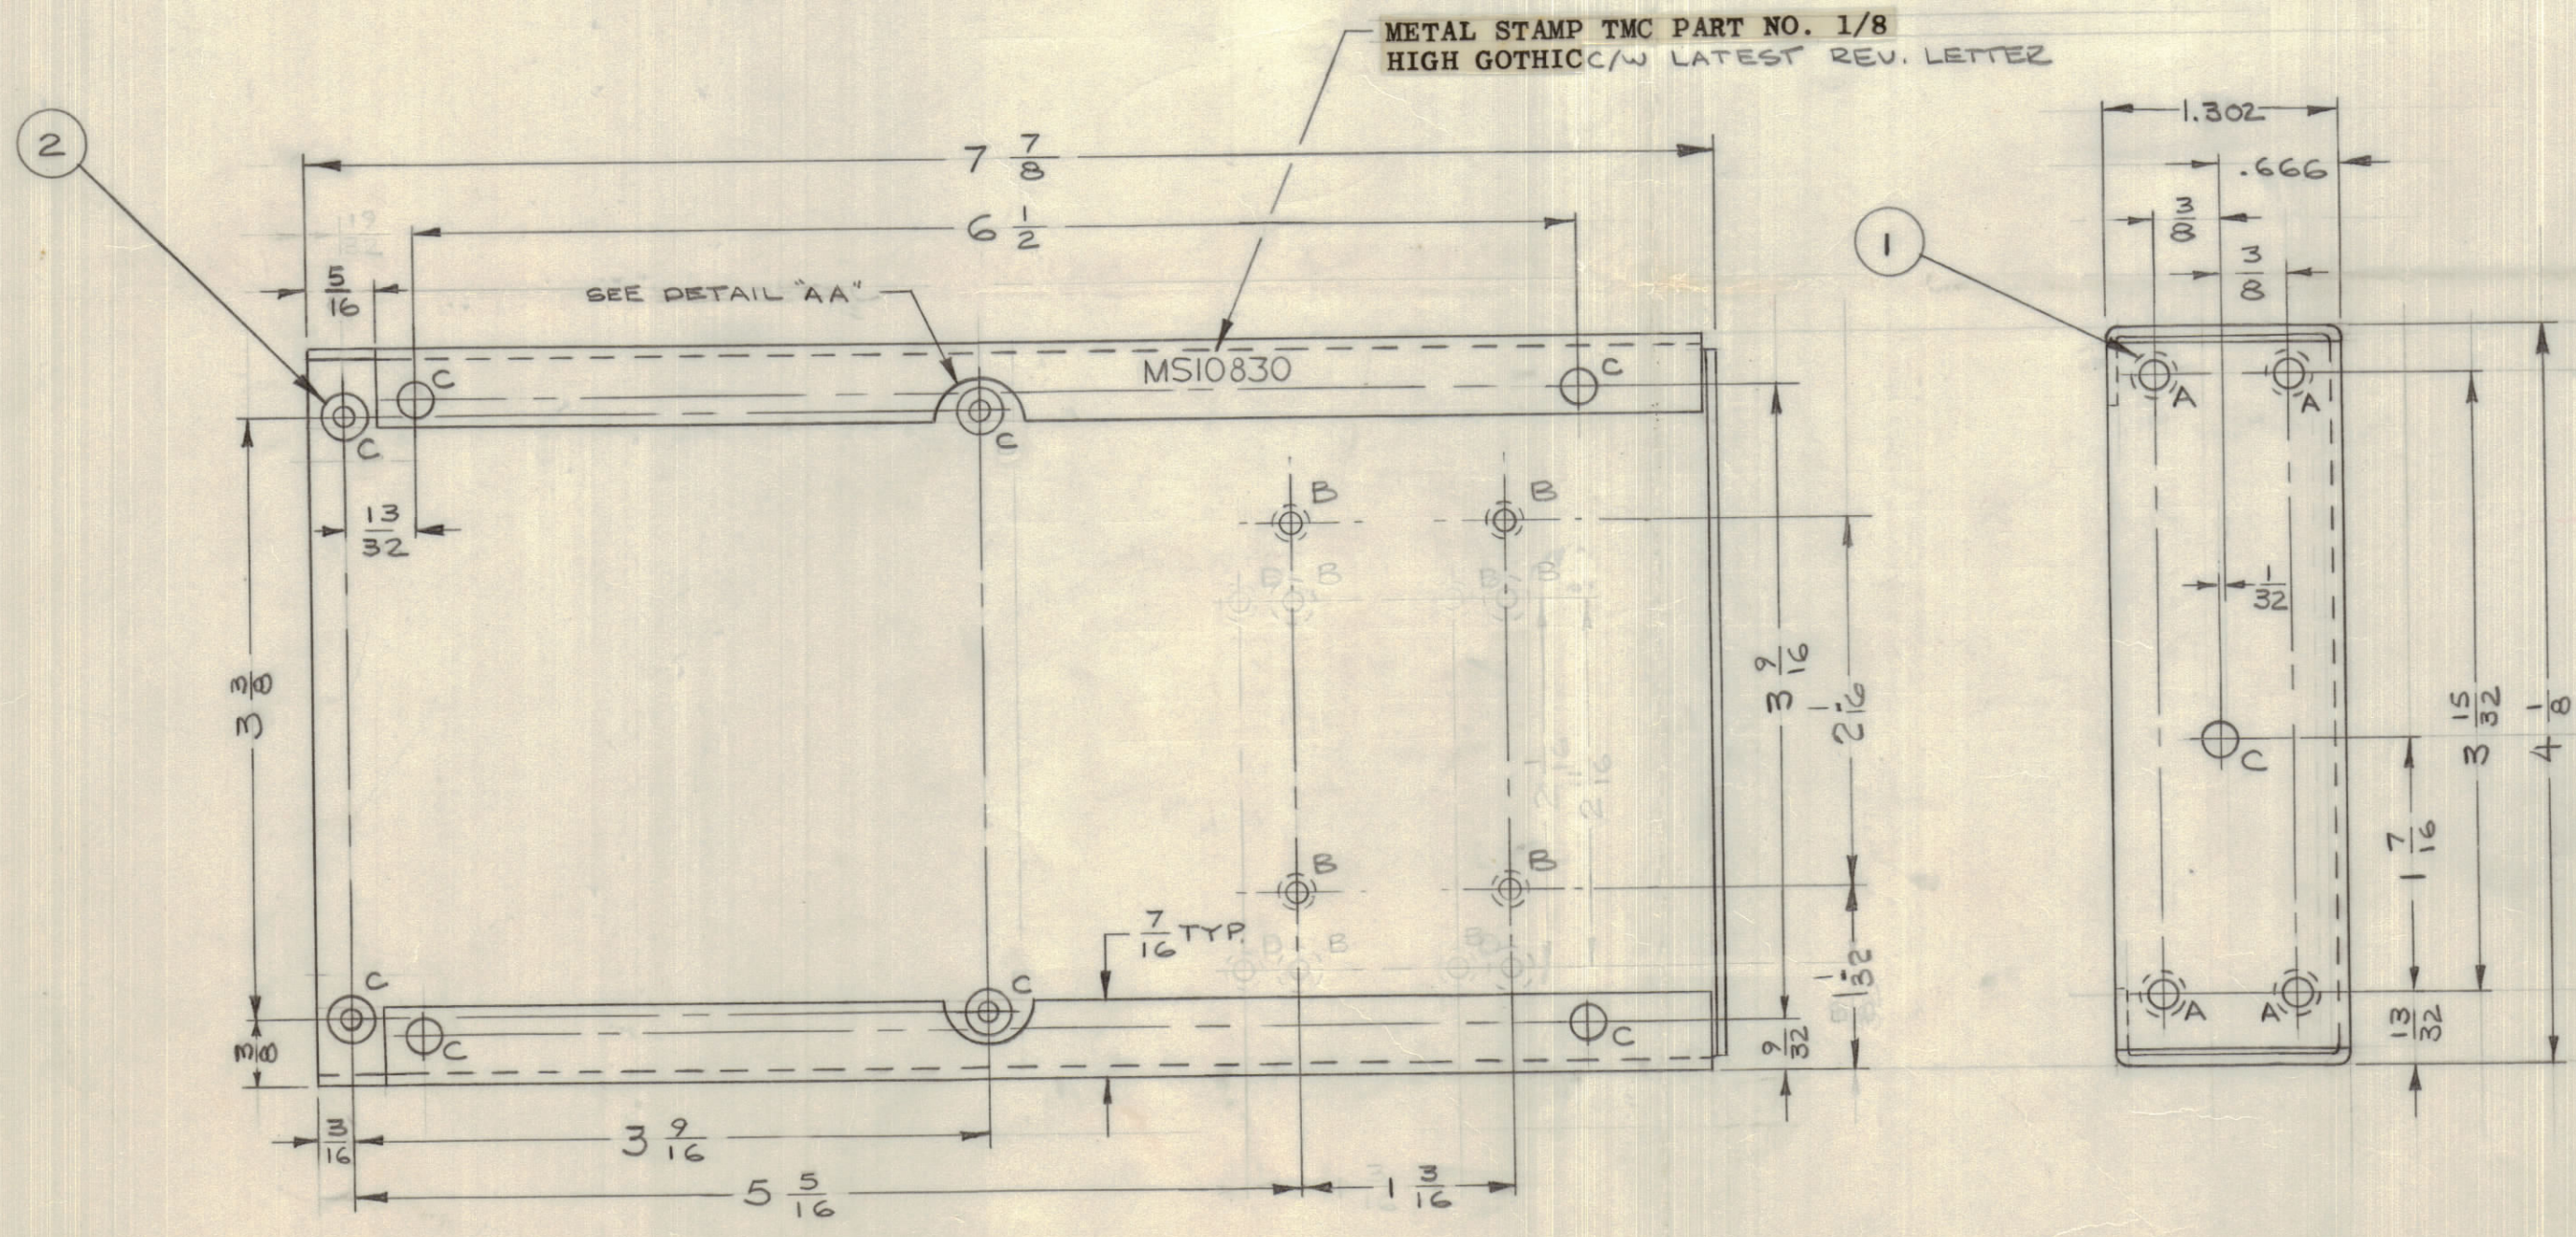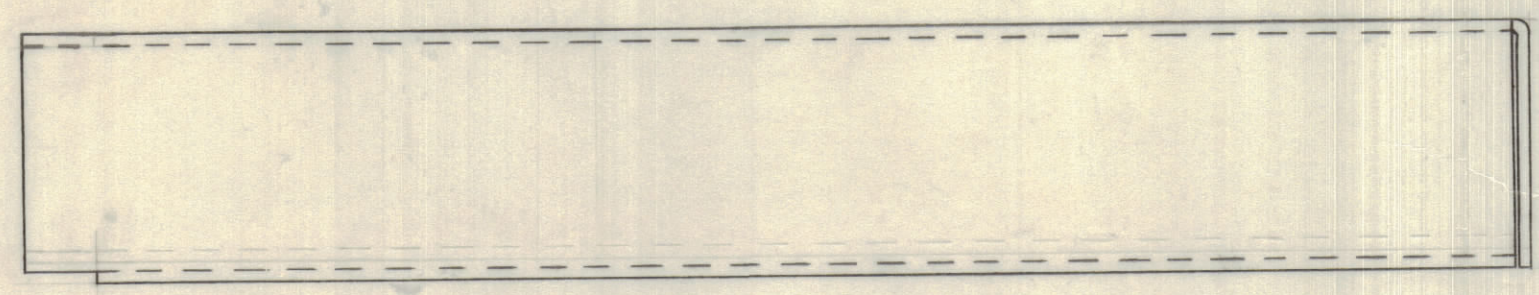

MS10830 A

HOLE	DESCRIPTION	REQ'D
A	.161 - .164 DIA.	4
B	DRILL .106 & CS'K 82° TO .199	4
C	.187 DIA.	9

TOLERANCES		SCALE: 1:1
ALL OTHERS	DEC. DIM. ± 1/64 FRAC. DIM. ± 1/64 ANGULAR DIM. ± 0° 30'	DRILL, PUNCH, COMMERCIAL STOCK SIZES AND MANUFACTURERS TOLERANCES ARE NOT INCLUDED.
	.X = .05 .XX = .01 .XXX = .005	

TTRT-1103D	059/67	MAY 11/67
MODEL	PROJECT NO.	DATE

.062 THK.		TMC (Canada) LIMITED	
STOCK SIZE		OTTAWA ONTARIO	
ALUM.		CHASSIS, WRAPAROUND	
MATERIAL		WEIGHT PER PC.	
57S-H34		RPL	
TYPE & TEMPER		DRAWN	
HEAT TREAT. SPEC.		ELEC. DES. APP.	
3404 IRIDITE		MECH. DES. APP.	
FINISH & SPEC. NO.		CHECKED	
		FINAL APPROVAL	
		MS10830 A	