



IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.		DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED					
MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES.							
ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
0		REL TO PROD	FEB 6/68		AP		
A		REV PER CEMN	SEPT 7/71	1056	DR.		
B		REV PER CEMN	19 DEC 75	1209	CC	AGS	SDW

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
------	------	----------	-------------	--------

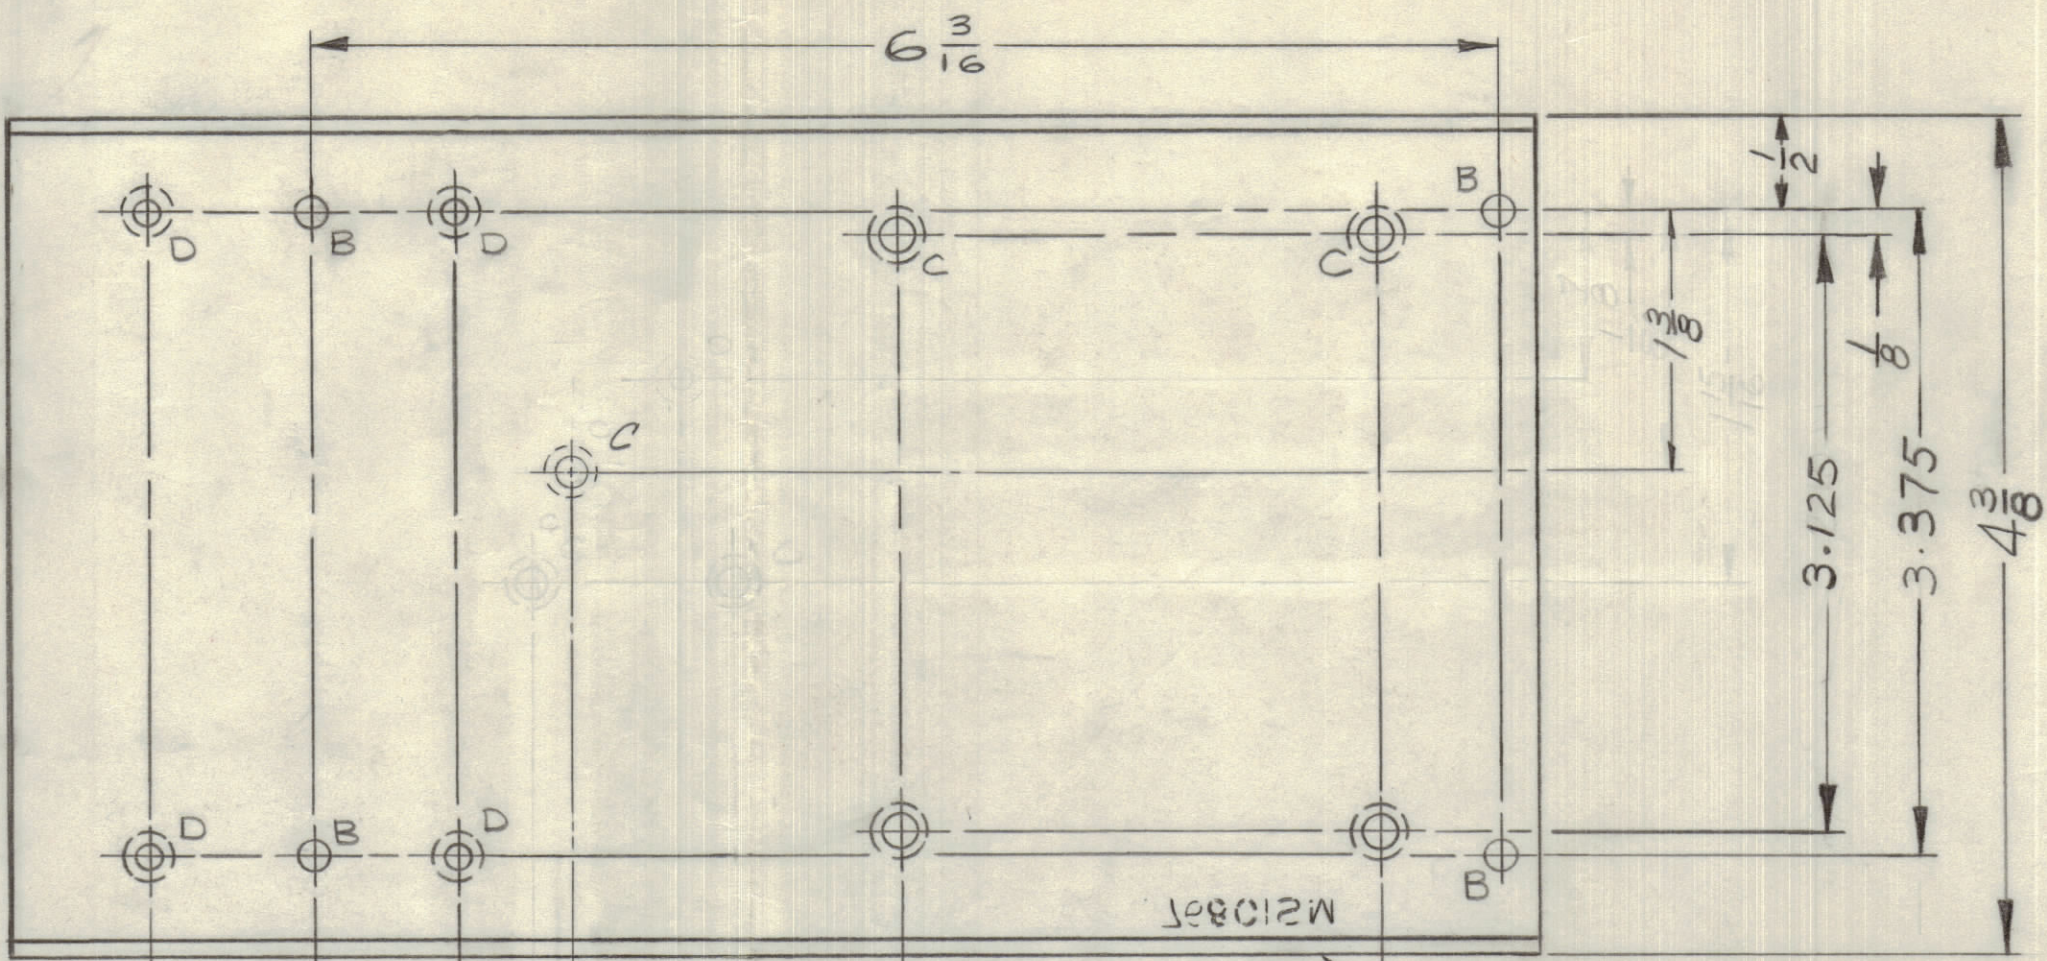

- UNLESS OTHERWISE SPECIFIED:
1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS.
 2. ALL ANGULAR BENDS 90°.
 3. REMOVE ALL BURRS AND SHARP EDGES.

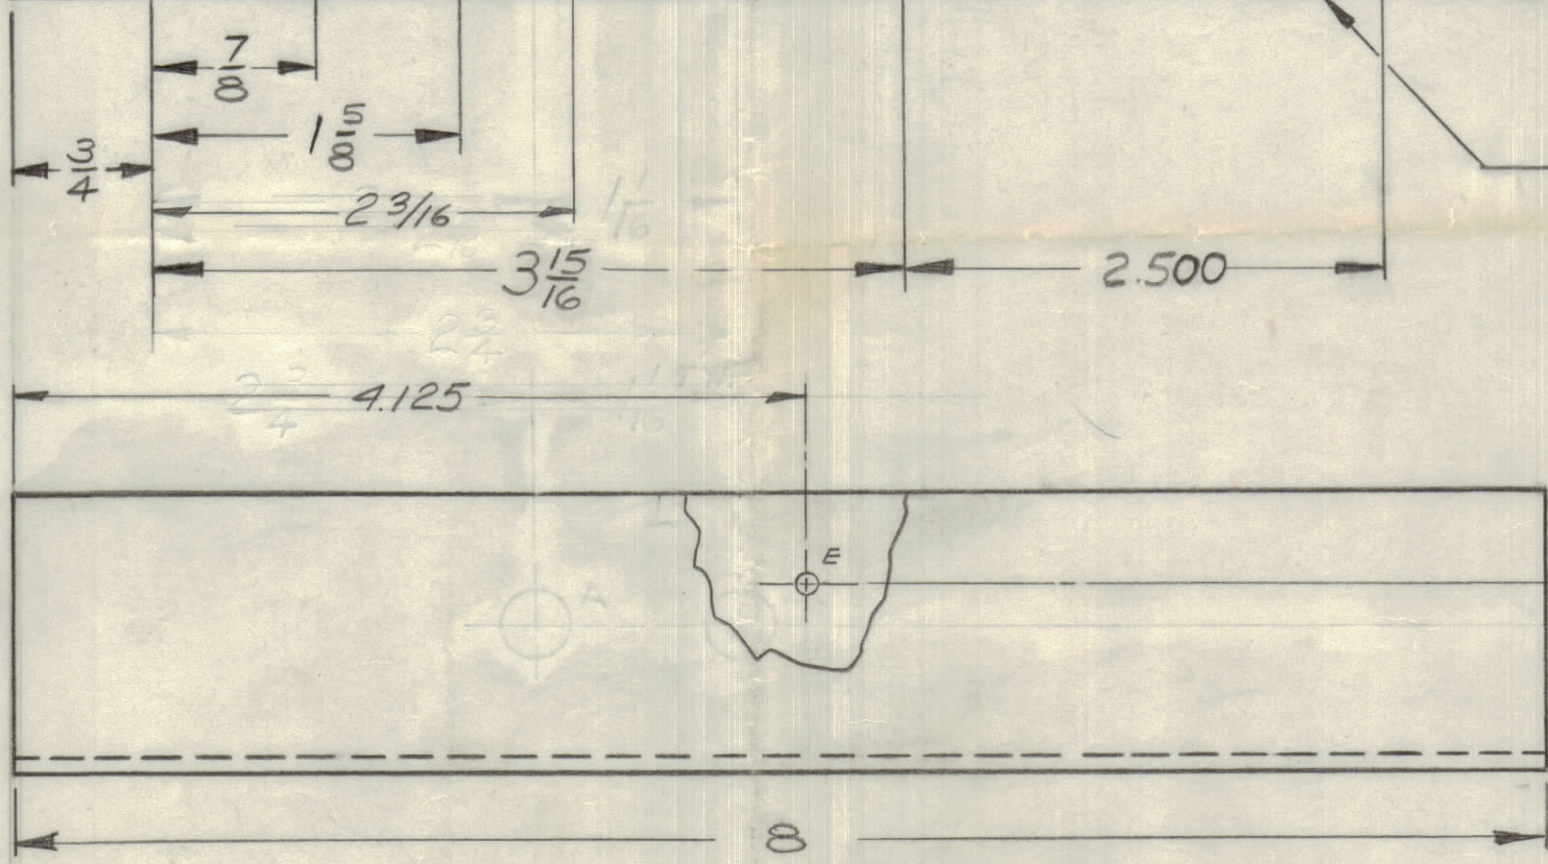

HOLE	DESCRIPTION	REQ'D
A	3/8 DIA.	2
B	11/64 DIA.	4
C	.155 DIA. C'SK 82° TO .285	5
D	.125 DIA. C'SK 82° TO .230	4
E	.125 DIA.	1

MS10867 B

REF: LD10281

.062		TMC (Canada) LIMITED	
STOCK SIZE		OTTAWA ONTARIO	
ALUM		CHASSIS	
MATERIAL		POWER SUPPLY	
575 - H34		AP	
TYPE & TEMPER		DRAWN	
		ELEC. DES. APP.	
		MECH. DES. APP.	
		CHECKED	
		FINAL APPROVAL	
HEAT TREAT. SPEC.		MS10867 B	
S404 IRIDITE			
FINISH & SPEC. NO.			

TOLERANCES		SCALE
ALL OTHERS	DEC. DIM. ± .XX = .05 FRAC. DIM. ± 1/64 .XX = .01 ANGULAR DIM. ± 0°30' .XXX = .005	1:1
DRILL, PUNCH, COMMERCIAL STOCK SIZES AND MANUFACTURERS TOLERANCES ARE NOT INCLUDED.		

STR-5	062/68	NOV. 24/67
MODEL	PROJECT NO.	DATE
USED ON		