


IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.						
MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES.						
ISSUE	ITEM	CHANGED FROM	DATE	CN. NO.	DRAFTS	CHECKER
Ø		REL TO PROD.	8 AUG 69		JW.	
A		REVISED PER CEMN	257 7/169	581	PW	
B		REVISED PER CEMN	257 25/69	612	PW	
C		REV PER CEMN	9 APR 1970	784	FRJ	
D		REV. PER CEMN	JULY 7/71	1035	NAT.	

E	REV PER CEMN	19 OCT 71	1076	RE	Had	JW
F	REV PER CEMN	FEB 10-72	1132	DR	ACS	JW

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
4	1	NT-10002-1	NUT	

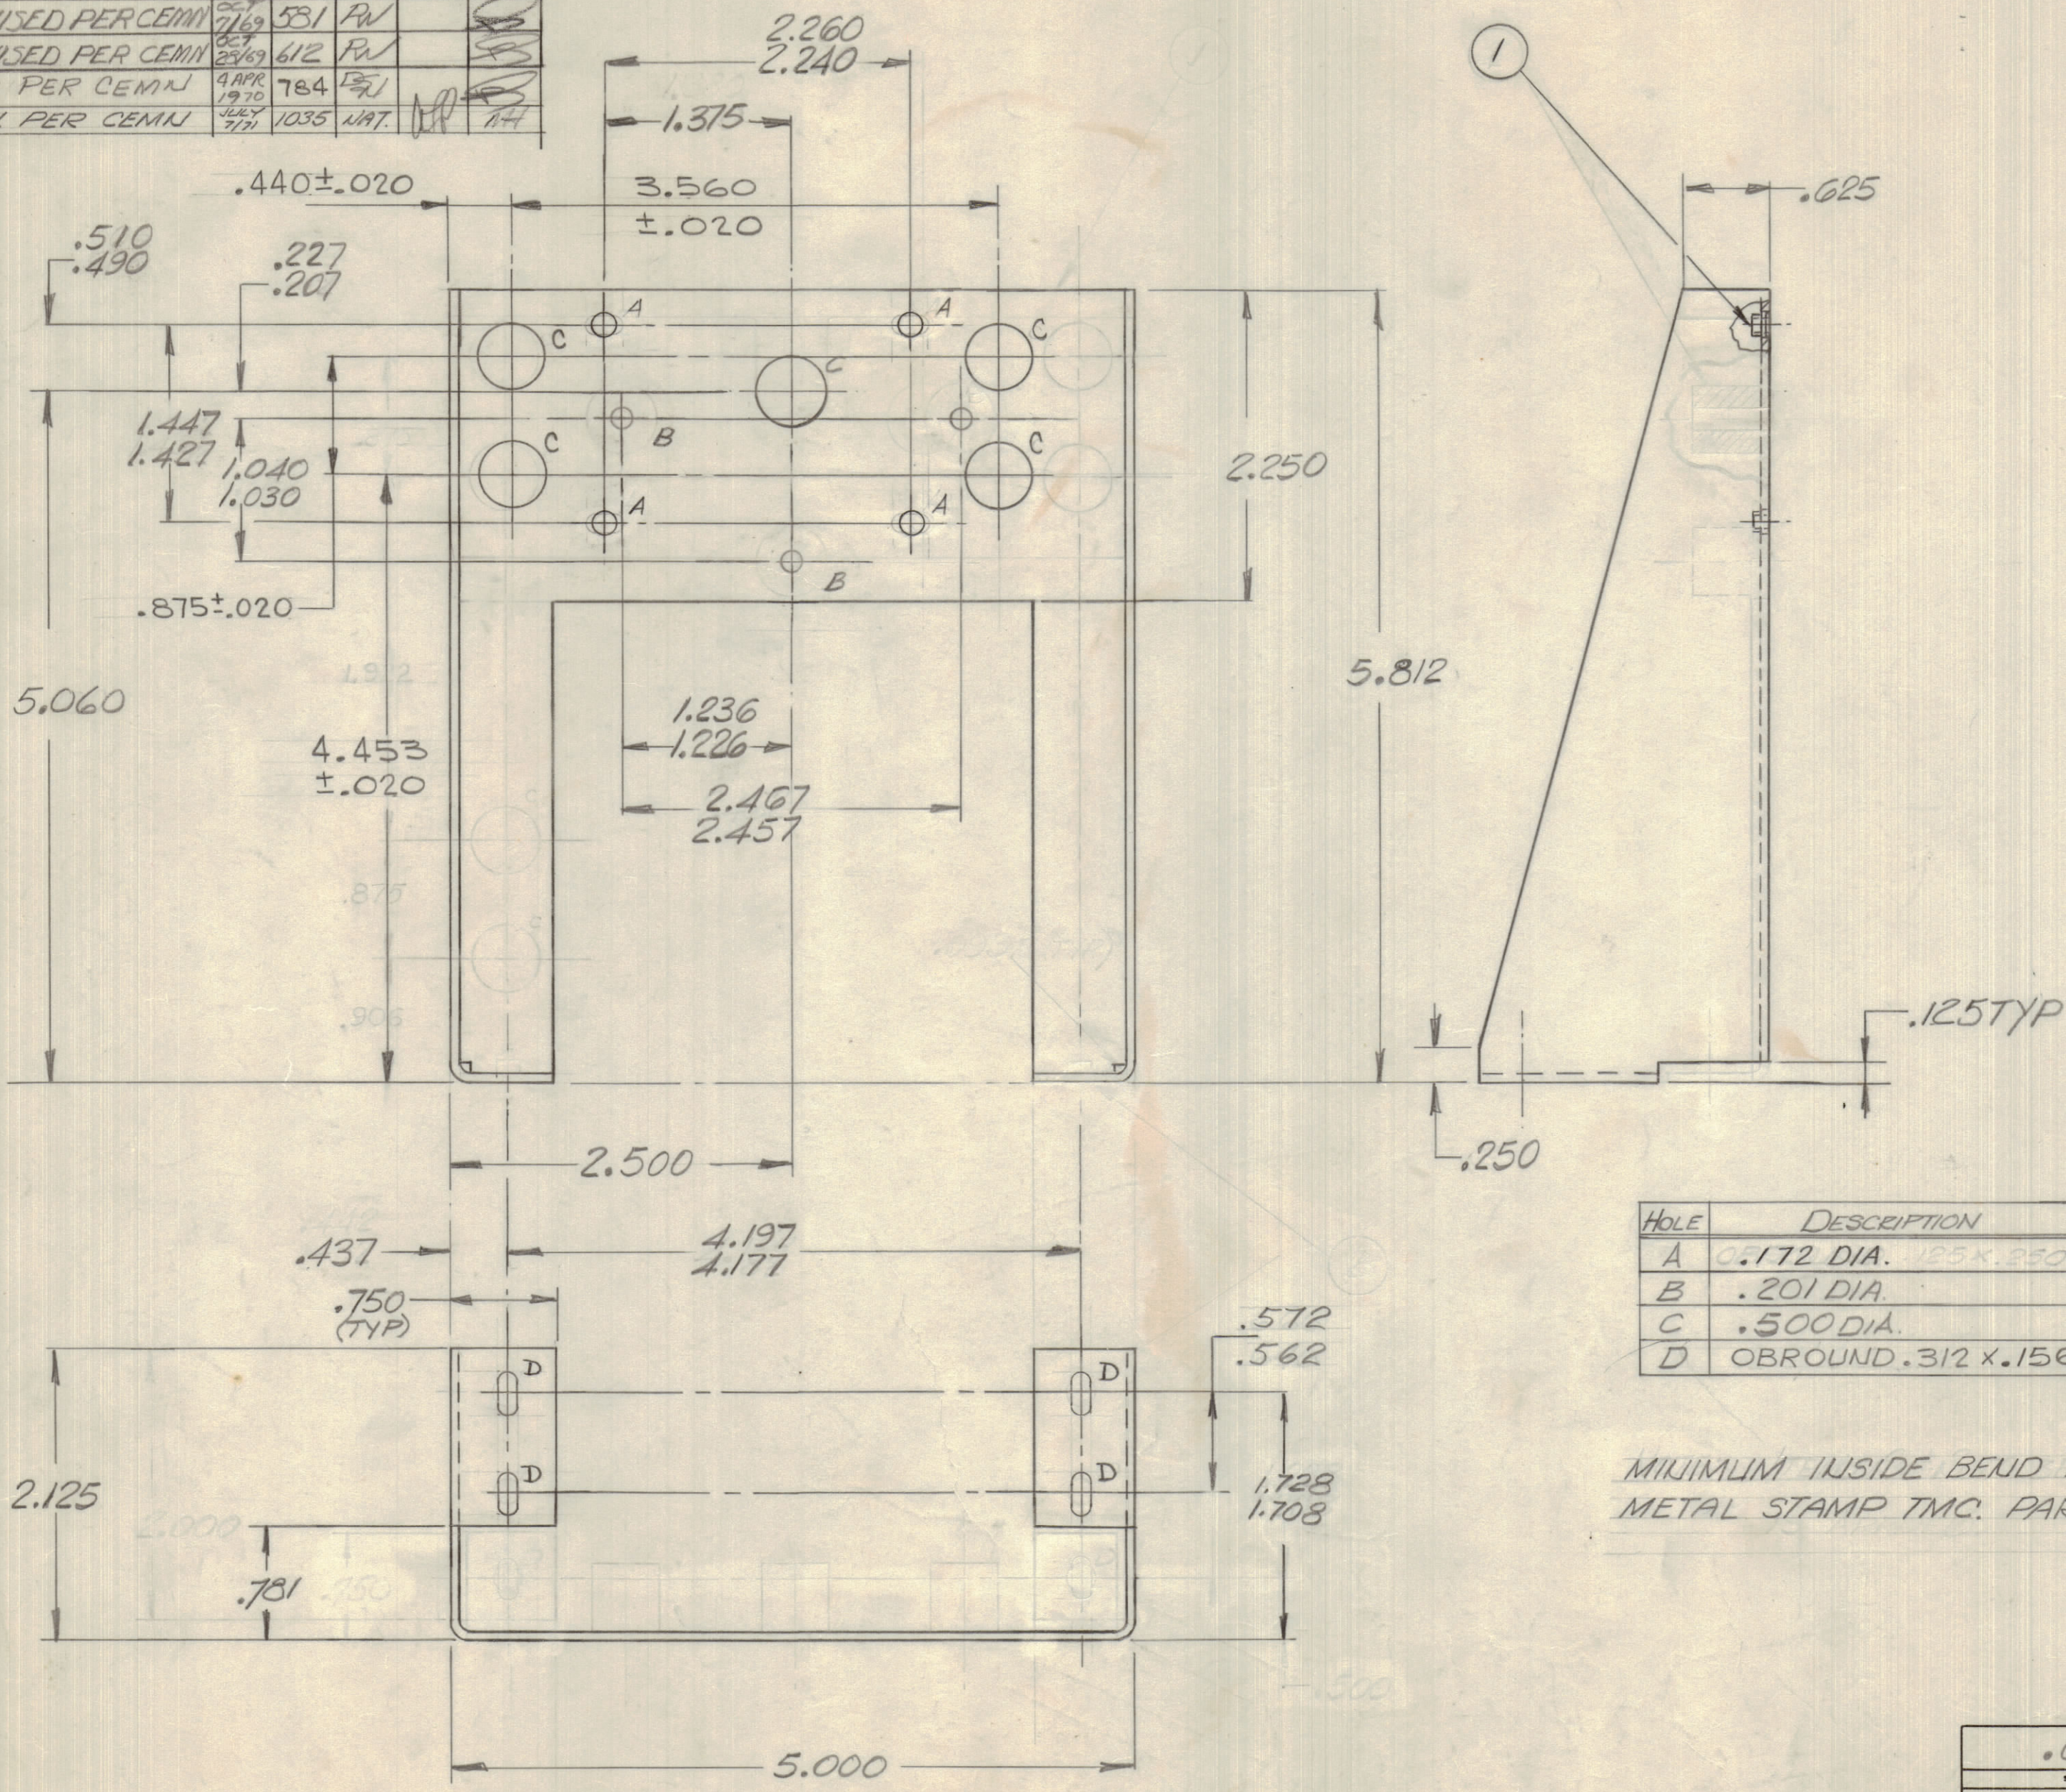

HOLE	DESCRIPTION	QTY
A	.05172 DIA. 125 X .250	4
B	.201 DIA.	3
C	.500 DIA.	5
D	OBROUND .312 X .156	4

MINIMUM INSIDE BEND RADIUS, .064 PER FINISHING METAL STAMP TMC. PART NO., 1/8 HIGH, GOTHIC.

MS11052 F

TOLERANCES		SCALE: 1:1
ALL OTHERS	DEC. DIM. ± .015 FRAC. DIM. ± 1/64 ANGULAR DIM. ± 0° 30'	DRILL, PUNCH, COMMERCIAL STOCK SIZES AND MANUFACTURERS TOLERANCES ARE NOT INCLUDED.

LPA-1K/CANI	088/69	8 AUG 69.
MODEL	PROJECT NO.	ASS'Y. NO.
		DATE

.064	TMC (Canada) LIMITED	
STOCK SIZE	OTTAWA	ONTARIO
AL-ALY	BRACKET, CAPACITOR MFG.	
MATERIAL	WEIGHT PER PC.	REAR.
575-H32		
TYPE & TEMPER	DRAWN	MECH. DES. APP.
HEAT TREAT. SPEC.	CHECKED	FINAL APPROVAL
171DITE S404		
FINISH & SPEC. NO.		MS11052 F