


IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.							
DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED							
MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES.							
ISSUE	ITEM	CHANGED FROM	DATE	CN. NO.	DRAFTS	CHECKER	ENG. APP.
Ø		REL TO PROD.	8 AUG 69		JW.		
A		REVISED PER CEMN	25 OCT 71	581	PR		
B		REVISED PER CEMN	25 OCT 71	612	PR		
C		REVISED PER CEMN	4 MAR 70	784	TSJ		
D		REV. PER CEMN	JULY 71	1035	NAT.		


E	REV PER CEMN	10 OCT 71	1076	PR	Hel.	JW
F	REV PER CEMN	25 OCT 71	1079	PR	Hel.	JW

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL

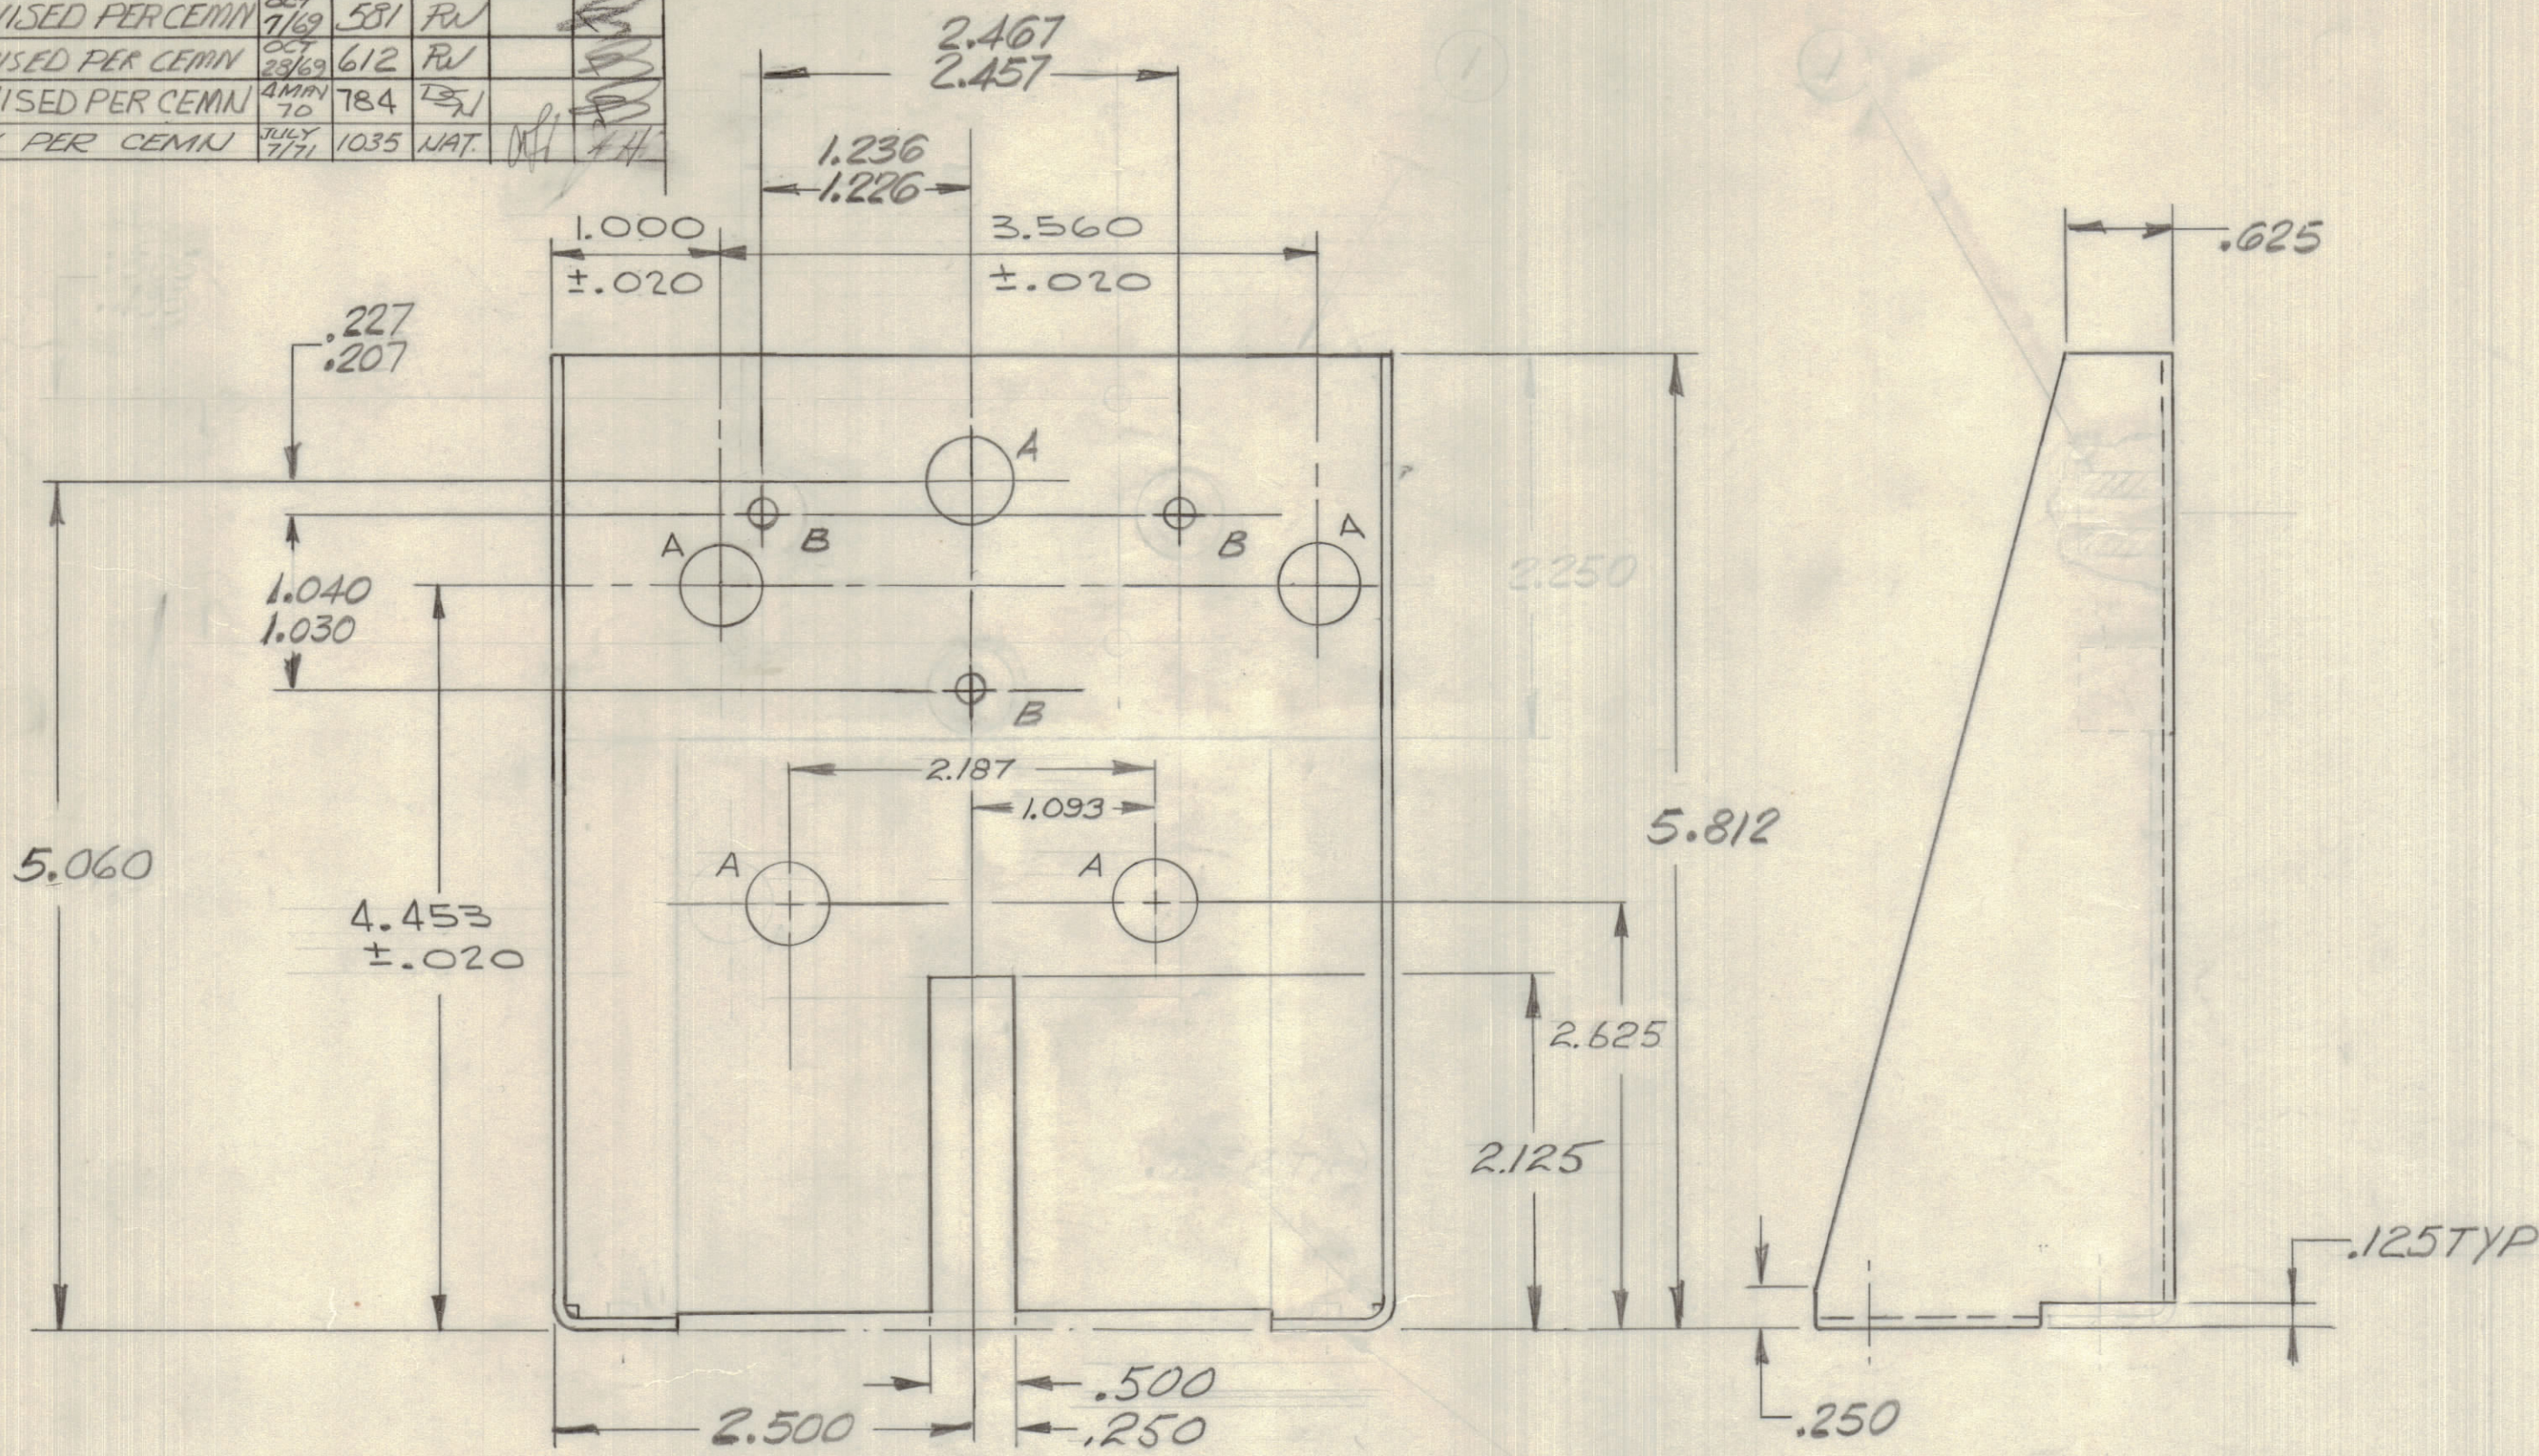

MS11053 F

HOLE	DESCRIPTION.	QTY
A	.500 DIA.	5
B	.201 DIA	3
C	OBROUND .312 X .156	4

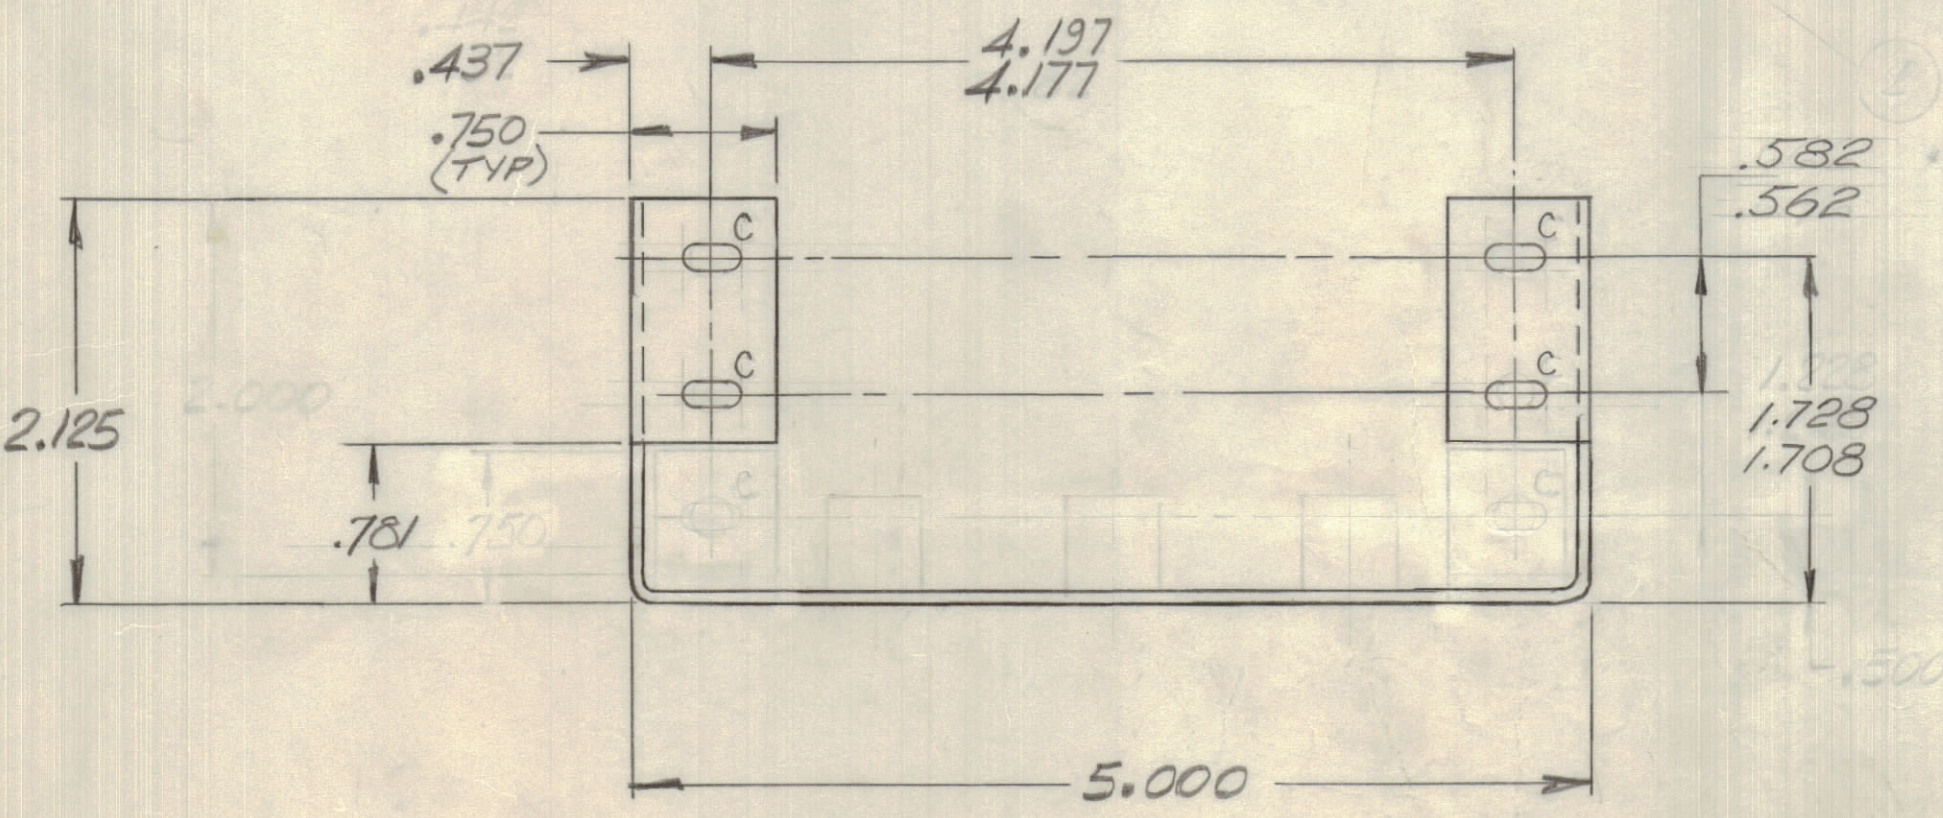

MINIMUM INSIDE BEND RADIUS, .064
 METAL STAMP TMC PART NO., 1/8 HIGH, GOTHIC.

REF-LD10366

TOLERANCES		SCALE: 1:1
ALL OTHERS	DEC. DIM. ± .015 FRAC. DIM. ± 1/64 ANGULAR DIM. ± 0° 30'	DRILL, PUNCH, COMMERCIAL STOCK SIZES AND MANUFACTURERS TOLERANCES ARE NOT INCLUDED.

LPA-1K/CAN1	088/69	8 AUG 69
MODEL	PROJECT NO.	DATE

.064	TMC (Canada) LIMITED	
STOCK SIZE	OTTAWA	ONTARIO
AL ALY	BRACKET, CAPACITOR MTG.	
MATERIAL	WEIGHT PER PC.	FRONT.
57S-H32		JW
TYPE & TEMPER	DRAWN	MECH. DES. APP.
HEAT TREAT. SPEC.	CHECKED	FINAL APPROVAL
IRIDITE 5404		MS11053 F
FINISH & SPEC. NO.		