


REQ. PER UNIT	USED ON		
	MODEL	ASSY. NO.	DATE
1	ATS-50TU		1-23-58
1	ATS-70TU		1-23-58

MS-1171 A

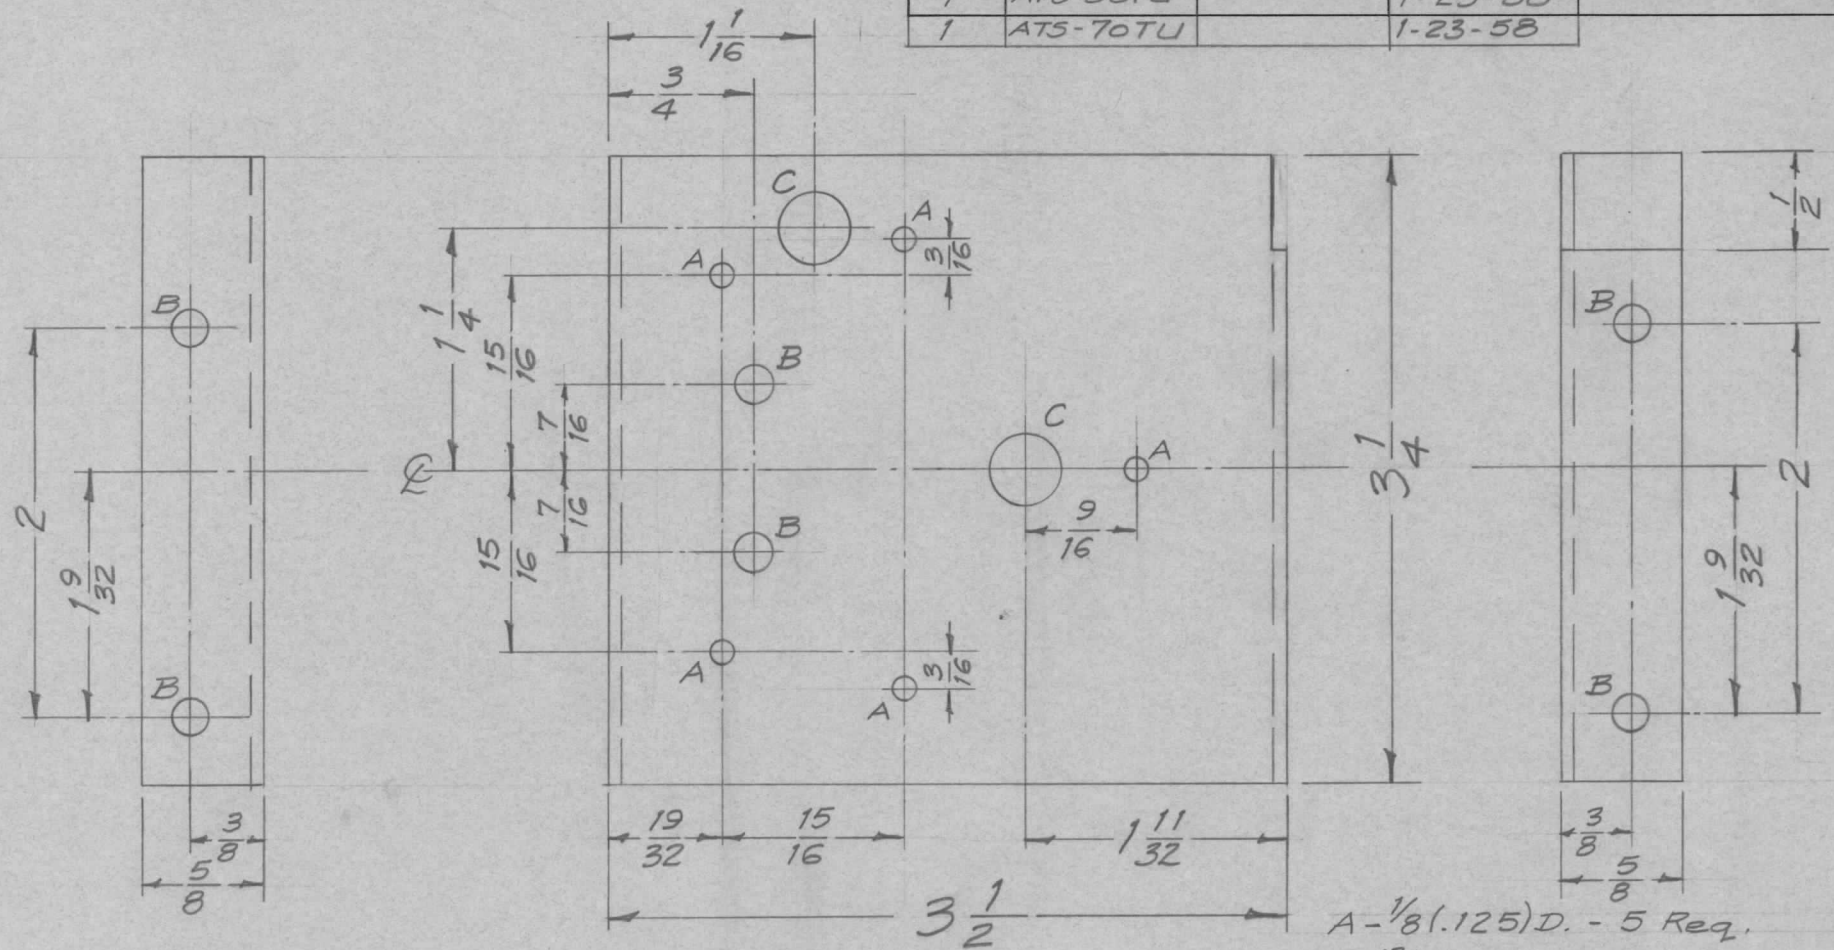

A - $\frac{1}{8}$ (.125) D. - 5 Req.
 B - $\frac{13}{64}$ (.203) D. - 6 Req.
 C - $\frac{3}{8}$ (.375) D. - 2 Req.
 REF - LD-401

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL		
										THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK			
										BRACKET, POTENTIOMETER			
A	1	S404 - IRIDITE WAS S101 - CAUSTIC DIP	12-8 59	1001	P		EMN						
TOLERANCES								SCALE: FULL					
DEC. DIM. \pm								MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION.					
FRAC. DIM. \pm 1/64								REMOVE ALL BURRS AND SHARP EDGES					
ANGULAR DIM. \pm													
								5052-H32	N	16-1-23-58	FILE	OK	
								S404 IRIDITE					
								FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.	MS-1171	A